



## Linear Actuators

Linear actuators for industrial, mobile, medical, office and domestic applications.



*Linear Motion. Optimized.™*

**Thomson -**  
*Linear Motion. Optimized.*

Often the ideal design solution is not about finding the fastest, sturdiest, most accurate or even the least expensive option. Rather, the ideal solution is the optimal balance of performance, life and cost.

Thomson is best positioned to help you most quickly configure the optimal linear motion solution for your application.

- Thomson invented anti-friction linear bearing technology. We own the broadest standard product offering of mechanical motion technologies in the industry.
- Modified versions of standard product are routine. White sheet design solutions available across our entire portfolio.
- Choose Thomson and gain access to over 70 years of global application experience in diverse industries including packaging, factory automation, material handling, medical, clean energy, printing, automotive, machine tool, aerospace and defense.
- As part of Danaher Corporation, we are financially strong and unique in our ability to bring together control, drive, motor, power transmission and precision linear motion technologies.

Thomson is the name you can trust for quality, innovation, on-time delivery, controlled costs, and reduced risk.

In addition to the information contained in this document, a wealth of product and application information is available online at [www.thomsonlinear.com](http://www.thomsonlinear.com). Also online are downloadable 3D models, software tools, our distributor locator and global contact information for Thomson. For immediate assistance in Europe contact us at +46 44 24 67 00 or email us at [sales.scandinavia@thomsonlinear.com](mailto:sales.scandinavia@thomsonlinear.com).

Talk to us early in the design process to see how Thomson can help identify the optimal balance of performance, life and cost for your next application. And, call us or any of our 2000+ distribution partners around the world for fast delivery of replacement parts.

### **The Danaher Business System -** Building sustainable competitive advantage into your business

The Danaher Business System (DBS) was established to increase the value we bring to customers. It is a mature and successful set of tools we use daily to continually improve manufacturing operations and product development processes. DBS is based on the principles of Kaizen which continuously and aggressively eliminate waste in every aspect of our business. DBS focuses the entire organization on achieving breakthrough results that create competitive advantages in quality, delivery and performance – advantages that are passed on to you. Through these advantages Thomson is able to provide you faster times to market as well as unsurpassed product selection, service, reliability and productivity.

### **Local Support Around the Globe**

Application Centers Global Manufacturing Operations Global Design & Engineering Centers



# Introduction

## Table of Contents

<b>Introduction.....</b>	<b>3</b>	<b>Accessories and Spare Parts.....</b>	<b>62</b>
Company Introduction.....	4	Mounting Components.....	62 - 64
Product Introduction.....	5	Electrical Components.....	65 - 66
The Benefits of Electrification.....	6 - 7	Spare Parts.....	67
Actuator Applications.....	8	<b>Ordering Keys.....</b>	<b>68</b>
Selection Procedure.....	9	Electrak DC-actuators.....	68 - 72
<b>Performance Overview.....</b>	<b>10</b>	Electrak AC-actuators.....	73 - 74
Standard Actuator Range.....	10 - 11	Lifting Columns.....	75
Non-driven and Rotary Actuators.....	12	Rodless Actuators.....	76 - 77
Legacy Actuators.....	13	Non-driven Actuators.....	78
<b>Electrak® Actuators.....</b>	<b>14</b>	<b>Glossary.....</b>	<b>80</b>
Electrak 1.....	14 - 15	A - C.....	80
Electrak 1SP.....	16 - 17	D - G.....	81
Electrak 050.....	18 - 19	H - Life.....	82
Electrak PPA-DC.....	20 - 21	Lift - O.....	83
Electrak 10.....	22 - 23	P - Si.....	84
Electrak LA14.....	24 - 25	Sp - W.....	85
Electrak Pro.....	26 - 27	<b>Application Data Form.....</b>	<b>86</b>
Electrak 5.....	28 - 29	Worksheet.....	86
Electrak LA24.....	30 - 31	Drawing/notes.....	87
<b>Lifting Columns.....</b>	<b>32</b>		
TC16.....	32 - 33		
DMD.....	34 - 35		
DMA.....	36 - 37		
<b>Rodless Actuators.....</b>	<b>38</b>		
LM80-H.....	38 - 39		
LM80-V.....	40 - 41		
LM80-I.....	42 - 43		
<b>Electrak® Non-driven Actuators.....</b>	<b>44</b>		
Electrak PPA-M.....	44 - 45		
Electrak FA14.....	46 - 47		
<b>Electrical Wiring Diagrams.....</b>	<b>48</b>		
DC-actuators.....	48 - 49		
AC-actuators.....	50		
<b>Actuator Controls.....</b>	<b>52</b>		
DPDT Switch.....	53		
AC-063.....	54 - 55		
AC-247 ELS.....	56 - 57		
Control DCG.....	58 - 59		
Control Accessories.....	60 - 61		

# Introduction

## Company Introduction

The history of the Thomson Electrak® actuator goes back to the development of ball screw actuators 40 years ago in Marengo, IL, USA. The first generation of general purpose actuators were developed for control of accessory drives on garden tractors and farm equipment. Since that simple beginning, actuators are now used in all types of equipment to automate a process, remove people from dangerous situations, provide remote control or make difficult, tedious manual jobs easier.

The linear actuators in this catalog represent proven design concepts found in the entire Electrak series. From light load 050s to the high performance Electrak Pro series capable of handling loads up to 9000 N, Thomson offers features unavailable anywhere else.

### The world's most versatile actuator selection

Thomson combined the clevis to clevis mount Electrak series, and the trunnion mount Electrak PPA units, to provide the most versatile selection of linear actuators available. Our actuator team has solved over 10000 tough application challenges with even tougher actuators. We

built our reputation in the mobile off highway market in extremely demanding operating conditions. And if you can't find the actuator to meet your application, call us for a cost effective actuator built to your needs. Thomson builds more custom actuators than anyone.

### You can count on Thomson

Thomson linear actuators – rugged, reliable remote linear motion control with the push of a button. You can count on Thomson for worldwide sales, service, application support and local availability. Please visit [www.thomsonlinear.com](http://www.thomsonlinear.com) for more information.

1967	1969	1974	1982	1984	1987	1988	1991
The first generation of actuators for use in garden tractors and farm equipment is released.	First line of ball screw driven actuators with right angle AC and DC motors is released.	First line of actuators with parallel motors and both acme and ball screw drive is released.	The "Tiger" line actuators are released for OEMs.	Electrak 1, 2, 5, 10 and 100 are released for distribution.	Electrak 205 and the first line of MCS controls are released.	Electrak 1SP with feedback potentiometer is released.	The first lifting columns, DMD and DMA, are released.
							

# Introduction

## Product Introduction

Thomson actuators are easy to mount and operate, require no maintenance, don't leak hydraulic fluid, are easy to incorporate into an automated process and once installed they will work reliably under the toughest conditions year after year.

Actuators offer advantages over mechanical and hydraulic systems in many applications. They are self-contained, rugged, and durable, making them ideal anywhere you want to lift, lower, push, pull, rotate or position a load.

### Compact design

With their compact size, actuators can be located in confined areas. An actuator with a 100 mm stroke length can produce 9000 N of force from a 290 mm package. Electrak 1 and 050 series actuators fit small areas with package lengths as short as 115 mm.

### Rugged and reliable

All Thomson actuators incorporate strong, high quality components to assure trouble-free service. Rugged spur, worm or helical gearing, aircraft quality lubricants and high performance motors provide the maximum life and value. The actuators are gasketed and sealed throughout for protection in wet, dirty and oily environments and are ideal for use on outdoor equipment. The rod style actuators have stainless steel or aluminum extension tubes to resist corrosion.

### Maintenance-free

All adjustments and lubrication are made at the factory and no maintenance is required or recommended. Consistent,

repeatable performance is provided for the entire lifetime of the actuator.

### Bidirectional

Thomson actuators can push and pull loads ranging from one to 900 kg, and can extend up to 900 mm. With the Thomson series of actuator controls, you can create an actuator control system to meet your particular motion control requirements.

### Safe operation

Motors used on Electrak actuators utilize thermal switches in their windings or Electronic Load Monitoring to shut the actuator off in case of overheating. A standard overload clutch or Electronic Load Monitoring will stop the motion if the load is too great or at the end of a stroke. All linear actuators will hold their loads with power removed.

### Versatile.

Stroke lengths of 25 to 1500 mms are available and speeds are as high as 110 mm per second. Actuators are easy to apply, quick to install and usually only requiring two wires for operation. A wide variety of options and controls makes it easy to find the perfect actuator for your application. And if you have special needs, cost effective custom solutions are our speciality.

1992	1994	1998	1999	2000	2004	2006
A patent for a load lock device is granted.	Electrak 1LL is released.	Electrak 150 with two patents is released. AC control line is released.	Electrak 050 with patented design and the first rotary actuators are released.	The first LM80 rodless actuator is released.	The triple profile lifting column TC16 and the "sweeper" actuator are released.	The Electrak Pro actuator line and the DCG control line are released.
						

# Introduction

## The Benefits of Electrification

Electrification is converting manual, hydraulic and pneumatic operations to electromechanical motion. Substantially improved machine performance and cost advantages can be gained through electrification.

### Reduce costs

- Electric actuation components cost less than comparable hydraulic and pneumatic systems.
- One electric linear actuator is faster and easier to install than the multiple hydraulic and pneumatic components required to achieve the same function.
- Electric actuators feature quick and predictable system tuning when compared to the headaches of configuring hydraulic systems and their components which contend with power variation, temperature variation, and non-linear performance profiles.
- Compare zero maintenance electric actuators against the fluid replacement, leak repairs and other routine maintenance needed to support hydraulic systems.
- Eliminate the environmental problems and costs associated with hydraulic fluid leaks and fluid disposal.

### Boost productivity and efficiency

- Improve control over critical machine operations with:
  - Multiple digital and analog feedback options
  - Fixed and programmable limit switches for “teach and repeat” positions
  - Low voltage switching options that can interface directly with programmable PC/PLC controllers
  - Pulse width modulation for variable speed control
- Superior accuracy and repeatability
- Link and automate simultaneous processes
- Reduce down time with:
  - Zero maintenance
  - Longer component life
  - Redundancy through manual override
- Improve safety and reduce costs by removing people from danger with convenient remote control

### Great opportunities for electric conversion

#### Making jobs easier.

- Raising and lowering a deck on a mower, paver or floor scrubber.
- Shifting manual transmission.
- Lifting wheelchairs into a vehicle.
- Opening and closing doors on buses or vans.

#### Automating a process.

- Moving twine across a round bale of hay for consistent wrap.
- Varying the chute opening on a salt/sand spreader based on speed for consistent application.
- Lift and lower pantographs on electrical trains and trams.

#### Providing remote control


- Throttle control from the rear of garbage trucks.
- Positioning the discharge spout on a large chipper, snowblower or combine.
- Opening a chute on a salt/sand spreader.
- Positioning of solar energy panels and wind power plant turbines.
- Opening/closing the engine hatch on boats.
- Positioning boat, handicap vehicle seats.
- Belt tensioning.

#### Removing people from danger.

- Sliding a cover over the stairs in a recreational vehicle.
- Throttle control for a tree stump grinder to keep the operator away from moving parts or flying debris.
- Medical waste/refuse compacting.

#### Replacing hydraulics or pneumatics


- Power steering.
- Dump beds on ATVs.
- Positioning mower decks on golf course equipment.

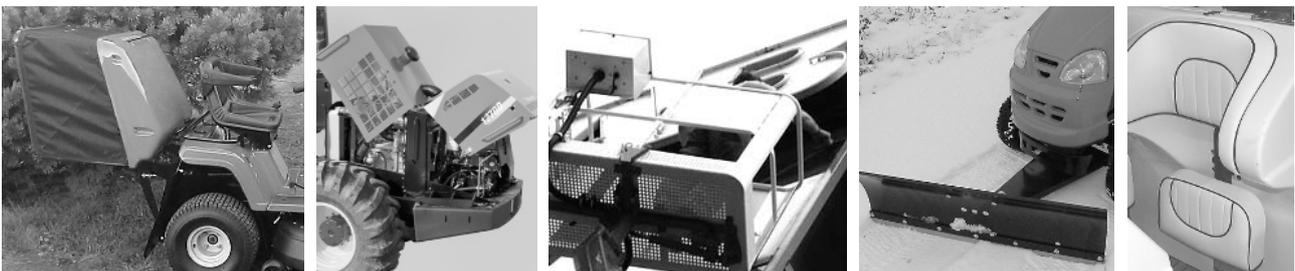

## Introduction

### The Benefits of Electrification

Replacing hydraulic or pneumatic cylinders with electrical linear actuators means a simpler and smaller installation, easier control, lower energy costs, higher accuracy, less maintenance, less noise and a cleaner, healthier environment.

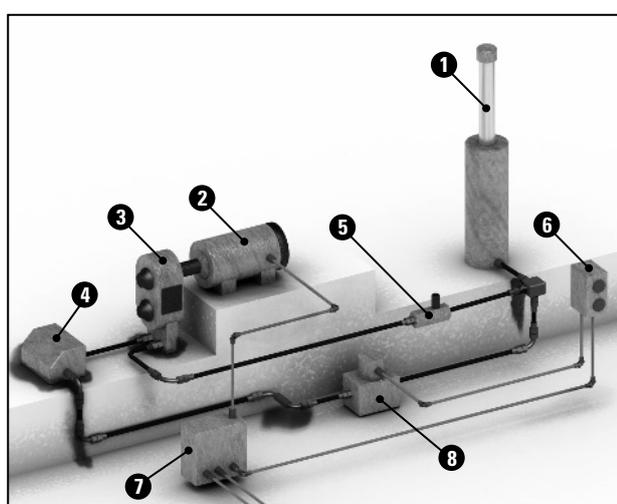


You can design, purchase and install all these components or you can select and install an actuator and control.

#### Single-acting, uni-directional hydraulic cylinder system

1. Hydraulic cylinder
2. Electric pump motor
3. Hydraulic pump
4. Hydraulic oil reservoir
5. Check valve
6. Operator push button box
7. Relay cabinet
8. Unloading valve

This single acting, uni-directional hydraulic cylinder system is one of the simplest hydraulic solutions. This system only allows consistent performance in one direction. In order to get consistent performance in both directions a bi-directional system would be required which is even more complex and costly.

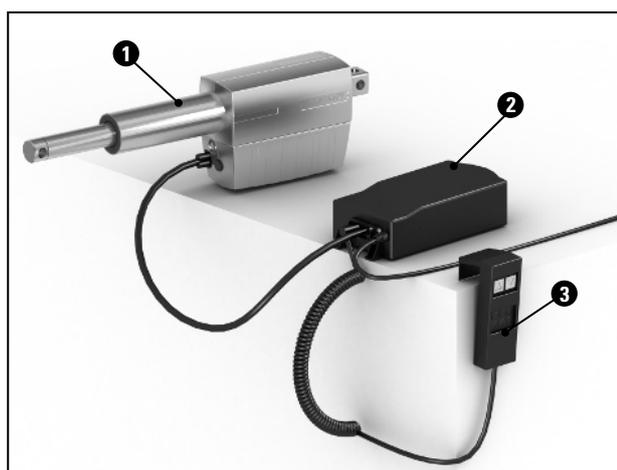

Plug and play type of connections, simple installation and no need for any set up or adjustments ensures accurate, clean and trouble free operation within the hour.

#### Electric linear actuator system

1. Linear actuator
2. Actuator control
3. Hand held control pendant

This simple electrical actuator system will ensure consistent operation in both directions. It will also give you added features such as electronic load monitoring, end of stroke limit switches, mid stroke protection and manual override operation in case of power failure. Optional features such as analog or digital position feedback, adjustable end of stroke limit switches, end of stroke indication outputs and signal following capability are also available. Another advantage is that a system like this is easy to integrate with other control systems normally found in industrial systems or vehicles such as PLC's, micro-controllers, computers or simple relay based systems.

# Introduction

## Actuator Applications

Thomson Electrak actuators can be found in the most diverse applications, ranging from agricultural to industrial, ventilation and medical equipment. Anywhere you want to lift, lower, push, pull, rotate or position a load - only your imagination will set the limit.

### Mobile-off-highway

Actuators are widely used in agricultural, construction, mining, forestry, road work and railway equipment for the control of seats, hoods, doors, covers, balers, pantographs, sprayer booms, throttles and much more.

### Turf and garden

Actuators can be found on riding lawn mowers, golf carts, garden tractors, cleaning machines, sky lifts and other utility vehicles.

### Industrial equipment

Actuators are used on conveyor belts, for adjustable work tables/platforms and in the opening and closing of hatches, doors and locks. They are also common in machines for dispensing, cutting, packaging, labeling, scanning or printing.

### Health and fitness

Actuators are commonly used in patient lifts/beds, handicap adapted vehicles and wheel chairs to position patients or equipment. Other applications include hospital devices, examination chairs/tables and work out/gym apparatus.

### Office, domestic and entertainment equipment

At home, in the office and in the entertainment business actuators are used in automatic doors, lifts, garage doors, gates, satellite dishes, beds, reclining chairs, adjustable office desks, arcade games, vending machines, theatre/TV/movie props and theme park attractions.

### Marine

On boats, ships and oil rigs actuators are used in seats, hatches, fire doors, rescue equipment, valves and throttles.

### Ventilation and process control

Actuators are used for valve control in ventilation and process equipment.



# Introduction

## Selection Procedure

Thomson actuators have been divided into good, better and best groups to help you select the appropriate actuator for your application. By using the simple selection procedure described below and the Performance Overview on the next few pages, the process will be even easier.

### Good

These actuators are the lowest cost solution, provide capable, reliable performance and have some flexibility of options and configurations. If you just need a basic actuator, this is the best choice.



### Better

These actuators have more flexibility in options, configurations and modifications. They have passed the test of time in the toughest agriculture and construction applications. Choose from this group if you need a rugged, heavy duty actuator customized to your application.



### Best

These robust and strong actuators are the market leaders with state of the art technology and flexibility. They are smaller, lighter and have a shorter retracted length than other actuators on the market. If you need electronic load monitoring, programmable limit switches, digital feedback or signal following, this is the group for you.



### Selection.procedure

#### Step 1 - Determine Voltage

DC actuators can be operated by battery, a rectifier or an actuator control with 230 Vac input. AC actuators are either 230 or 400 Vac.

#### Step 2 - Determine Load/Speed

Select the actuator which has the load and speed rating that suits your application.

#### Step 3 - Select Stroke Length

Choose the desired stroke length from either the Performance Overview pages or the individual product pages.

#### Step 4 - Verify Design Considerations

Do you need a very short retracted length, adjustable, fixed or programmable limit switches, electronic load monitoring, digital or analog feedback, low voltage power switching, manual override, signal following, clevis mounting, tube mounting or trunnion mounting? If you need an actuator to take side loads or cantilever loads, select from the TC16, DMD, DMA or LM80 actuators.

#### Step 5 - Select Control

The controls in the catalog are designed for use with Elektrak actuators and range from a simple switch to a control with membrane switches and feedback display or with a hand pendant.

### On-line.selection.software

On [www.danahermotion.com/linear\\_actuator\\_advisor](http://www.danahermotion.com/linear_actuator_advisor) you can select an actuator by using the actuator product advisor. This easy to use software lets you play with all the parameters and will give you all the relevant data and the correct ordering information for your choice.

### Can't find.what.you.are.looking.for?

If you are an OEM customer and can't find exactly what you need, contact customer service at +46 (0)44 24 67 90 for a custom solution.

# Performance Overview

## Standard Actuator Range

	ELECTRAK.						
	1	1SP	050	PPA-DC	10	LA14	
							
<b>Product availability</b>							
North America / Europe / Asia <sup>1</sup>	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	/•/•	
<b>General performance</b>							
Product group rating	good	good	better	good	better	best	
Input voltage - Vdc / Vac [V]	12, 24, 36 <sup>2</sup> /	12, 24, 36 <sup>2</sup> /	12, 24, 36 /	12, 24, 36, 90 <sup>3</sup> /	12, 24, 36 /	12, 24, 36 /	
Maximum dynamic load [N]	340	340	500	6670	6800	6800	
Maximum speed [mm/s]	75	75	48	33	60	60	
Maximum stroke length [mm]	150	150	200	914	610	600	
Restraining torque [Nm]	2,3	0	0	23	12	0	
Protection class	IP65	IP65	IP56	IP52	IP65	IP65	
<b>Features</b>							
Mounting configuration	clevis	clevis	clevis	trunnion	clevis	clevis/trunnion	
Screw type - acme / worm / ball	• / /	• / /	/• /	/ /•	• <sup>2</sup> / /•	• / /•	
Overload clutch			•	•	•	•	
Motor overload protection	•	•	•	•	•	•	
End of stroke limit switches	•		•				
Potentiometer feedback		•					
Electronic load monitoring							
Dynamic braking			• <sup>7</sup>				
Manual override							
<b>Optional features</b>							
End of stroke limit switches				•	• <sup>3</sup>		
Potentiometer feedback			•	•	•	•	
Encoder feedback				•			
Programmable limit switches							
End of stroke indication outputs							
Low voltage power switching							
Signal follower input							
External adjustable magnetic sensors						•	
Manual override				• <sup>3</sup>	•	•	
<b>More information</b>							
See page <sup>1</sup>	14	16	18	20	22	24	
<b>Actuator Controls</b>							
Recommended control	AC-247 ELS	AC-247 ELS	DCG-150	AC-063	AC-063	AC-063	

<sup>1</sup> Products not available in this region are not further described in this catalog. Contact customer support for more information.

<sup>2</sup> Not available in North America.



# Performance Overview.

## Non-driven and Rotary Actuators

	PPA-M	FA14
		
<b>Product availability</b>		
North America / Europe / Asia <sup>1</sup>	•/•/•	/•/•
<b>General performance</b>		
Product group rating	good	best
Max. input torque [Nm]	9	1,8
Max. input speed [rpm]	100	3000
Maximum dynamic load [N]	6670	6800
Maximum speed [mm/s]	8	37
Maximum stroke length [mm]	914	600
Restraining torque [Nm]	23	0
<b>Standard features</b>		
Mounting configuration	trunnion	clevis/trunnion
Screw type - acme / worm / ball	/ / •	• / / •
Overload clutch		•
<b>Optional features</b>		
Manual override		•
Protective bellows	•	
External adjustable magnetic sensors		•
<b>More information</b>		
See page <sup>1</sup>	44	46

<sup>1</sup> Products not available in this region are not further described in this catalog. Contact customer support for more information.

	ROTARY
	DGB
	
<b>Product availability</b>	
North America / Europe / Asia	• / •
<b>General performance</b>	
Product group rating	better
Input voltage - Vdc / Vac [V]	12, 24, 36 /
Maximum torque [Nm]	20
Maximum speed [rpm]	200
Maximum duty cycle [%]	25
Protection class	IP56
<b>Standard features</b>	
Mounting configuration	clevis/tapped holes
Overload clutch	•
Motor overload protection	•
<b>Optional features</b>	
Dual output shafts	•
Manual override	•
<b>More information</b>	
See page <sup>1</sup>	–

<sup>1</sup> Products not available in this region are not further described in this catalog. Contact customer support for more information.

# Performance.Overview.

## Legacy Actuators

	ELECTRAK.LEGACY.ACTUATORS		
	1LL	150	100
			
<b>Product.availability</b>			
North America / Europe / Asia	• / /	• / • / •	• / /
<b>General.performance</b>			
Product group rating	good	better	better
Input voltage - Vdc / Vac [V]	12, 24 /	12, 24, 36 / 115 <sup>1</sup>	24 /
Maximum dynamic load [N]	340	2000	6800
Maximum speed [mm/s]	76	71	48
Maximum stroke length [mm]	152	406	609
Restraining torque [Nm]	0	0	12
Protection class	IP65	IP56	IP65
<b>Standard.features</b>			
Mounting configuration	clevis	clevis	tube
Screw type - acme / worm / ball	• / /	/ • /	/ / •
Overload clutch			
Motor overload protection		•	•
Potentiometer feedback			•
Fixed end of stroke limit switches	•		
Adjustable end of stroke limit switches			•
Internally restrained	•	•	
<b>Optional.features</b>			
Adjustable end of stroke limit switches		•	
Potentiometer feedback		•	
Manual override			
External magnetic position sensors			

<sup>1</sup> Not available in Europe.

### About Legacy Actuators

The legacy products will not be further described in this catalog. We recommend you choose one of the products on the preceding pages, especially when designing new equipment. However, the legacy actuators can still be purchased and we fully support them. Please contact customer support if you need more information.

### About Custom Actuators

The actuators you see on these pages are some of the building blocks we use to create cost effective custom actuators for OEMs. If you can't find the actuator that meets your needs, call customer service at +46 (0) 44 24 67 90 for a custom solution. Thomson is the industry leader in custom actuator design.

# Electrak.1

12, 24 and 36 Vdc - load up to 340 N



## Standard Features and Benefits

- Very compact and lightweight
- Integrated end of stroke limit switches
- Corrosion resistant housing
- Self-locking acme screw drive system
- Maintenance free
- Ideal for replacement of comparable size pneumatic and hydraulic cylinders

## General Specifications

Parameter	Electrak.1
Screw type	acme
Internally restrained	no
Manual override	no
Dynamic braking	no
Holding brake	no, self-locking
End of stroke protection	end of stroke limit switches
Mid stroke protection	no
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric Pack-Con male 8911773 with terminal 6294511. Mating connector: 8911772 with terminal 8911639 (p/n 9300-448-001)
Certificates	CE
Options	none

» Ordering Key - see page 68

» Glossary - see page 80

» Electric Wiring Diagram - see page 48

## Performance Specifications


Parameter		Electrak.1
Maximum load, dynamic / static	[N]	
S •• -09A04		110 / 1300
S •• -09A08		225 / 1300
S •• -17A08		340 / 1300
S •• -17A16		340 / 1300
Speed, at no load / at maximum load	[mm/s]	
S •• -09A04		75 / 52
S •• -09A08		45 / 33
S •• -17A08		26 / 17
S •• -17A16		14 / 7
Available input voltages	[Vdc]	12, 24, 36
Standard stroke lengths	[inch]	1, 2, 3, 4, 5, 6
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	25
End play, maximum	[mm]	0,9
Restraining torque	[Nm]	2,3
Lead cross section	[mm <sup>2</sup> ]	1
Lead length	[mm]	110
Protection class		IP65

## Compatible Controls

Control.model	See.page
DPDT switch	53
AC-247 ELS	56
DCG-150	58

# Electrak.1

12, 24 and 36 Vdc - load up to 340 N

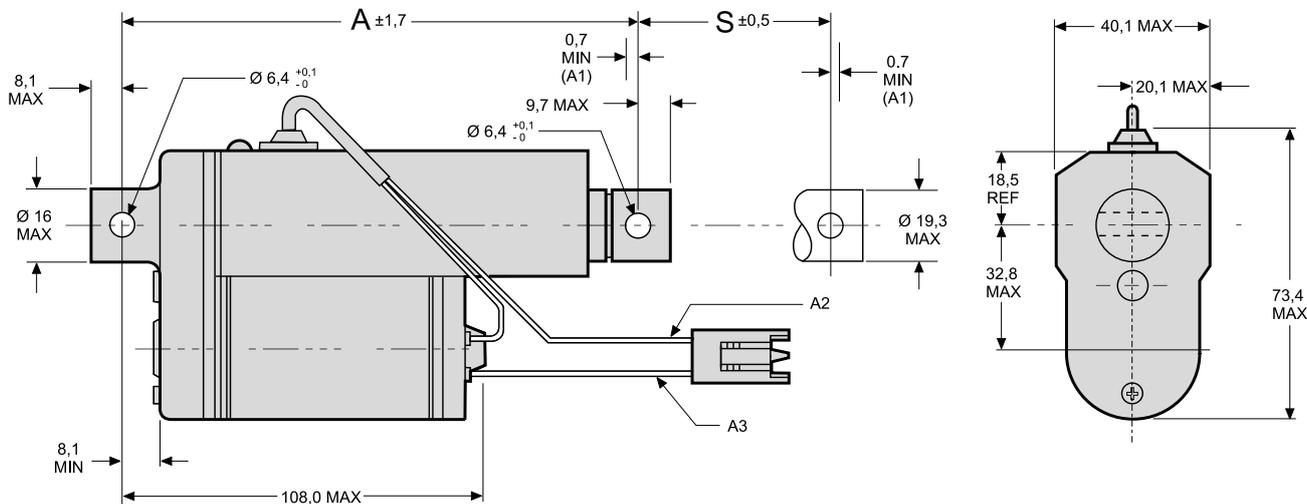

S: stroke  
 A: retracted length  
 A1: installation must include at least this much coast beyond limit switch shut off  
 A2: red lead  
 A3: yellow lead


Ordering.stroke	[inch]	1	2	3	4	5	6
Electrical.stroke.(S).*	[mm.(inch)]	20,8 (0,82)	46,2 (1,82)	71,6 (2,82)	97,0 (3,82)	122,4 (4,82)	147,8 (5,82)
Retracted.length.(A)	[mm]	134,5	159,9	185,3	210,7	236,1	261,5
Weight	[kg]	0,52	0,54	0,60	0,63	0,66	0,68

\* The electrical stroke is the stroke when the internal limit switches switch off the power to the motor. The installation then must allow the extension tube to coast at least 0,7 mm beyond that position before it becomes mechanically blocked to travel any further (distance A1). If there is no mechanical block the extension tube coasting distance will depend on the load, no load means the longest coasting distance while the distance becomes shorter as the load becomes higher. The exact coasting distance depends on the load, in which direction the load acts (push or pull), the mounting orientation of the actuator and any added friction to the system by guides or other installations and has to be determined on a case to case basis.

## Performance Diagrams

Speed and Current vs. Load

12 Vdc

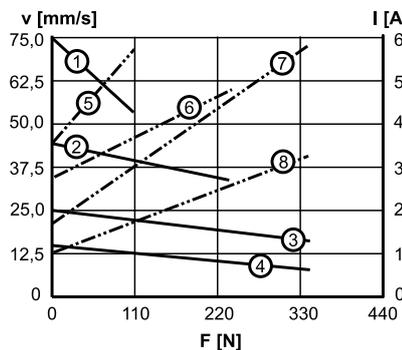


V: speed I: current F: load

- 1: speed S12-09A04
- 2: speed S12-09A08
- 3: speed S12-17A08
- 4: speed S12-17A16
- 5: current S12-09A04
- 6: current S12-09A08
- 7: current S12-17A08
- 8: current S12-17A16

Speed and Current vs. Load

24 Vdc

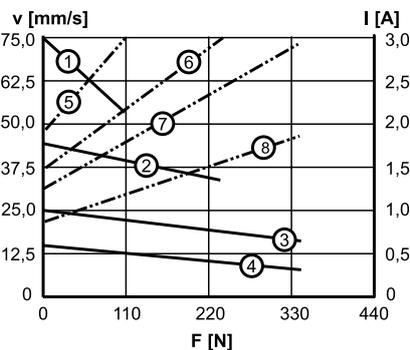


V: speed I: current F: load

- 1: speed S24-09A04
- 2: speed S24-09A08
- 3: speed S24-17A08
- 4: speed S24-17A16
- 5: current S24-09A04
- 6: current S24-09A08
- 7: current S24-17A08
- 8: current S24-17A16

Speed and Current vs. Load

36 Vdc

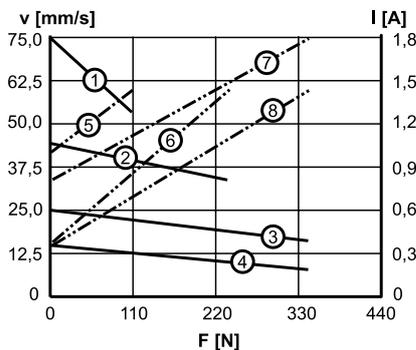

V: speed I: current F: load

- 1: speed S36-09A04
- 2: speed S36-09A08
- 3: speed S36-17A08
- 4: speed S36-17A16
- 5: current S36-09A04
- 6: current S36-09A08
- 7: current S36-17A08
- 8: current S36-17A16

# Electrak.1SP

12, 24 and 36 Vdc - load up to 340 N



» Ordering Key - see page 68

» Glossary - see page 80

» Electric Wiring Diagram - see page 49

## Standard Features and Benefits

- Very compact and lightweight
- Potentiometer feedback
- Corrosion resistant housing
- Self-locking acme screw drive system
- Maintenance free
- Internally restrained extension tube
- Ideal for replacement of comparable size pneumatic and hydraulic cylinders

## General Specifications

Parameter	Electrak.1SP
Screw type	acme
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	no, self-locking
End of stroke protection	no
Mid stroke protection	no
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric Pack-Con male 8911773 with terminal 6294511. Mating connector: 8911772 with terminal 8911639 (p/n 9300-448-001)
Certificates	CE
Options	none

## Performance Specifications

Parameter		Electrak.1SP
Maximum load, dynamic / static	[N]	
SP •• -09A04		110 / 1300
SP •• -09A08		225 / 1300
SP •• -17A08		340 / 1300
SP •• -17A16		340 / 1300
Speed, at no load / at maximum load	[mm/s]	
SP •• -09A04		75 / 52
SP •• -09A08		45 / 33
SP •• -17A08		26 / 17
SP •• -17A16		14 / 7
Available input voltages	[Vdc]	12, 24, 36
Standard stroke lengths	[inch]	2, 4, 6*
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	25
End play, maximum	[mm]	0,9
Restraining torque	[Nm]	0
Lead cross section	[mm <sup>2</sup> ]	1
Lead length	[mm]	110
Protection class		IP65
Potentiometer	[kOhm]	10**

\* Six inch stroke length not possible for SP •• -17A16.


\*\* See table on page 17 for resistance change per mm.

## Compatible Controls

Control.model	See.page
DPDT switch	53
AC-247 ELS	56
DCG-150	58

# Electrak.1SP

12, 24 and 36 Vdc - load up to 340 N

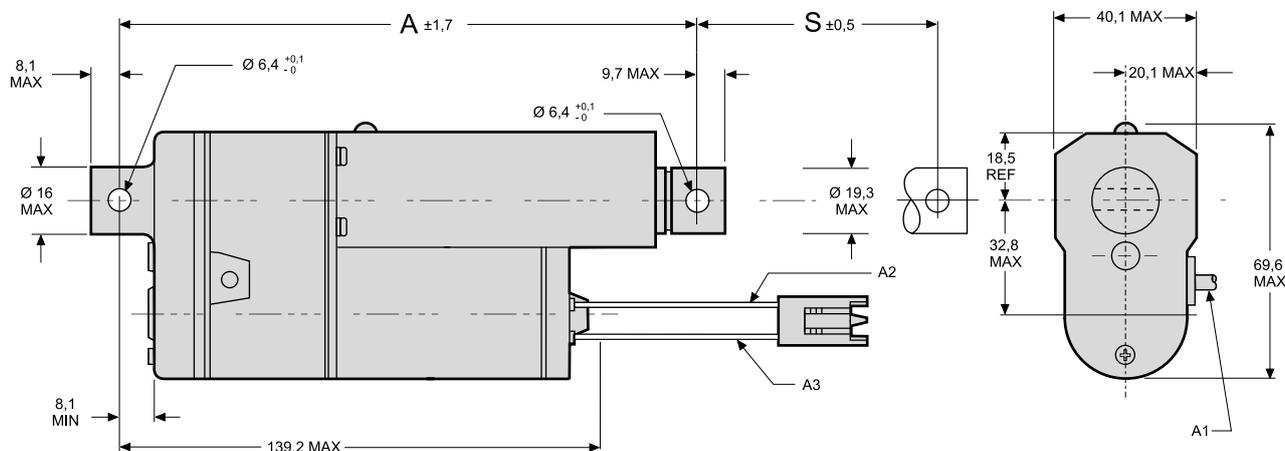


S: stroke  
 A: retracted length  
 A1: cable for potentiometer feedback, length = 635 mm  
 A2: black lead for 12 Vdc units, white lead for 24 Vdc units, blue lead for 36 Vdc  
 A3: yellow lead

Ordering.stroke	[inch]	2	4	6*
Actual.stroke.(S)	[mm.(inch)]	58,7 (2,31)	115,1 (4,53)	171,5 (6,75)
Retracted.length.(A)	[mm]	197,9	254,3	310,7
Weight	[kg]	0,8	0,85	0,9
Potentiometer.resistance.change	[ohm/mm]	94	47 (63)**	31

\* Six inch stroke length not possible for SP ••-17A16. \*\* SP ••-17A16 with 4 inch stroke = 63 ohm/mm, all other stroke lengths has 47 ohm/mm.


## Performance Diagrams

Speed and Current vs. Load  
 12 Vdc

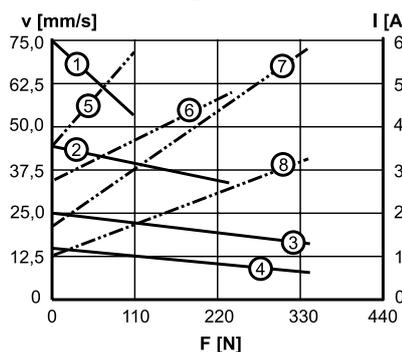


V: speed I: current F: load  
 1: speed SP12-09A04  
 2: speed SP12-09A08  
 3: speed SP12-17A08  
 4: speed SP12-17A16  
 5: current SP12-09A04  
 6: current SP12-09A08  
 7: current SP12-17A08  
 8: current SP12-17A16

Speed and Current vs. Load  
 24 Vdc

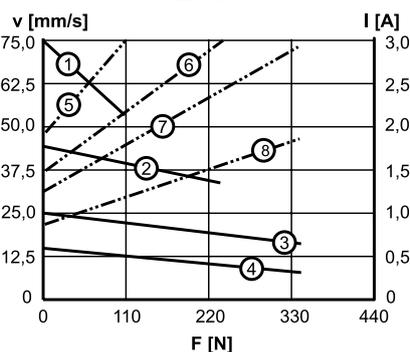

V: speed I: current F: load  
 1: speed SP24-09A04  
 2: speed SP24-09A08  
 3: speed SP24-17A08  
 4: speed SP24-17A16  
 5: current SP24-09A04  
 6: current SP24-09A08  
 7: current SP24-17A08  
 8: current SP24-17A16

Speed and Current vs. Load  
 36 Vdc

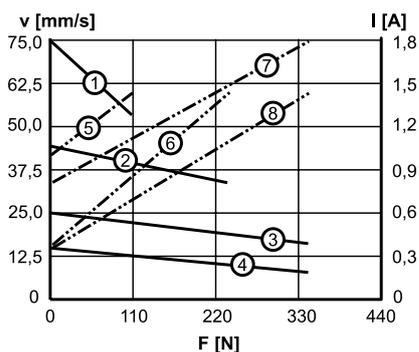

V: speed I: current F: load  
 1: speed SP36-09A04  
 2: speed SP36-09A08  
 3: speed SP36-17A08  
 4: speed SP36-17A16  
 5: current SP36-09A04  
 6: current SP36-09A08  
 7: current SP36-17A08  
 8: current SP36-17A16

# Electrak.050

12, 24 and 36 Vdc - load up to 510 N



» Ordering Key - see page 69

» Glossary - see page 80

» Electric Wiring Diagram - see page 48

## Standard Features and Benefits

- Designed for office or medical applications
- Small, quiet and lightweight
- Very short retracted length
- Low cost
- Durable and corrosion free plastic housing
- Color molded into the plastic, no painting required
- End of stroke limit switches with dynamic braking
- Maintenance free
- Internally restrained extension tube
- Estimated life is minimum 40000 cycles
- Q-version for noise sensitive applications

## General Specifications

Parameter	Electrak.050
Screw type	worm
Internally restrained	yes
Manual override	no
Dynamic braking	yes, at end of stroke
Holding brake	no, self-locking
End of stroke protection	internal limit switches
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads
Motor connector	no
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• potentiometer 10 kOhm*</li> <li>• cross holes rotated 90°</li> <li>• white housing</li> </ul>

\* See performance specification table for resistance change per mm of travel.

## Performance Specifications


Parameter	Electrak.050
Maximum load, dynamic / static [N]	510 / 1020
DE•••17W41	275 / 550
DE•••17W42	140 / 280
DE•••17W44	
Speed, at no load / at maximum load [mm/s]	12 / 9
DE•• - 17W41	24 / 18
DE•• - 17W42	48 / 37
DE•• - 17W44	9 / 7,5
DE•• Q17W41	18 / 14
DE•• Q17W42	38 / 30
DE•• Q17W44	
Available input voltages [Vdc]	12, 24, 36
DE•• -	24
DE•• Q	
Standard stroke lengths [mm]	25, 50, 75, 100, 125, 150, 175, 200
Operating temperature limits [°C]	-30 – +80
Full load duty cycle @ 20 °C [%]	25
End play, maximum [mm]	1,5
Restraining torque [Nm]	0
Lead cross section [mm <sup>2</sup> ]	1
Lead length [mm]	500
Protection class	IP56
DE•• -	IP51
DE•• Q	
Potentiometer resistance change [ohm/mm]	22,0
DE•••17W41	21,9
DE•••17W42	21,2
DE•••17W44	

## Compatible Controls

Control.model	See.page
DPDT switch	53
DCG-150	58
AC-247 ELS	56

# Electrak.050

12, 24 and 36 Vdc - load up to 510 N

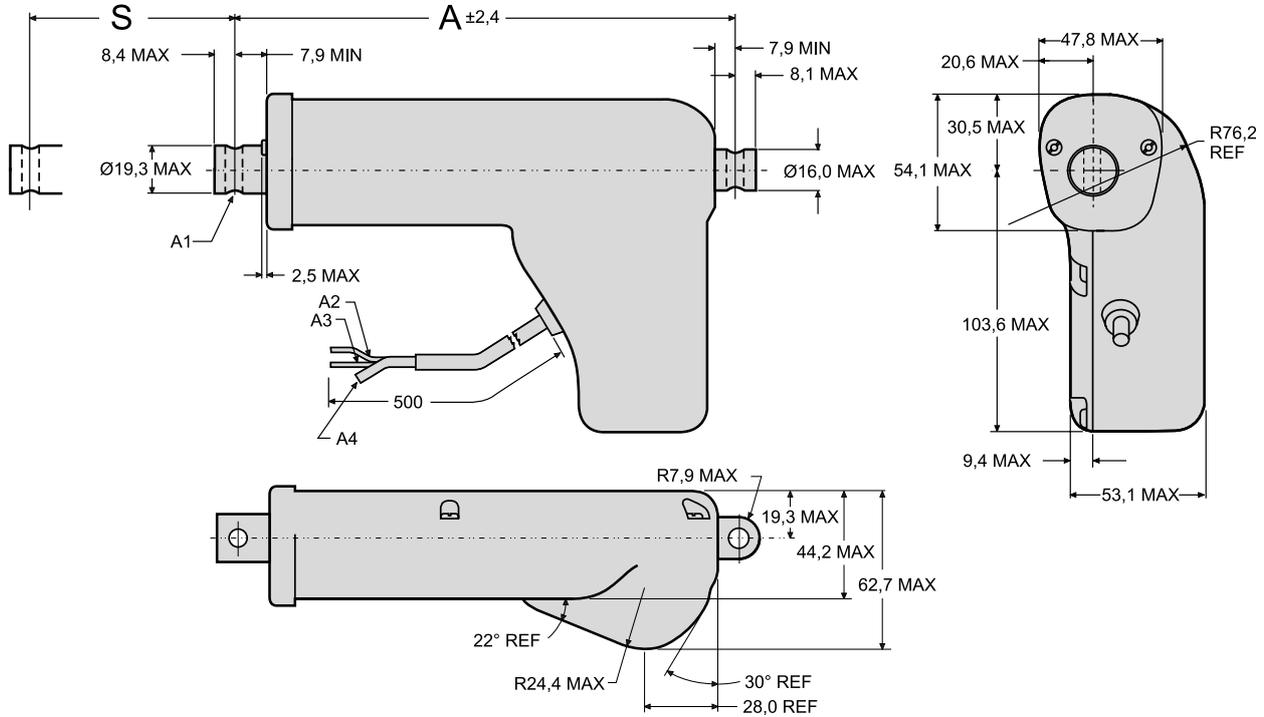

S: stroke (tolerances: 17W41 = ± 3,23 mm, 17W42 = ± 4,25 mm, 17W44 = ± 5,26 mm)  
 A: retracted length  
 A1: Ø 6 mm +0,15/-0 mounting cross holes (2 ×) in standard position


A2: red lead  
 A3: yellow lead  
 A4: vent tube Ø 3 mm

Stroke (S)	[mm]	25	50	75	100	125	150	175	200
Retracted length (A)	[mm]	114,2	139,2	164,2	189,2	214,2	239,2	264,2	289,2
Retracted length, with potentiometer (A)	[mm]	145,7	170,7	195,7	220,7	245,7	270,7	295,7	- *
Weight	[kg]	0,59	0,64	0,69	0,73	0,78	0,82	0,87	0,91
Weight with potentiometer	[kg]	0,69	0,74	0,79	0,83	0,88	0,92	0,97	- *


\* 200 mm stroke not possible with potentiometer (PO, MP, PF options)

## Performance Diagrams

050, standard version  
 Speed and Current vs. Load

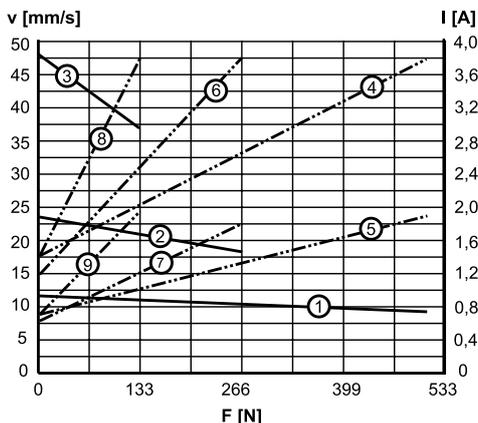

050, Q-version  
 Speed and Current vs. Load

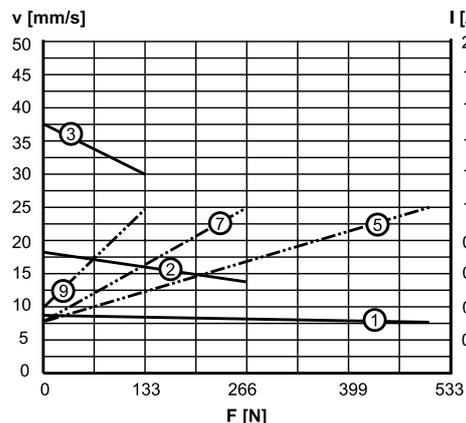


V: speed I: current F: load

- 1: speed DE ••• 17W41
- 2: speed DE ••• 17W42
- 3: speed DE ••• 17W44
- 4: current 12 Vdc, DE12 - 17W41
- 5: current 24 Vdc, DE24 • 17W41
- 6: current 12 Vdc, DE12 - 17W42
- 7: current 24 Vdc, DE24 • 17W42
- 8: current 12 Vdc, DE12 - 17W44
- 9: current 24 Vdc, DE24 • 17W44

# Electrak.PPA-DC

12, 24 and 36 Vdc - load up to 6670 N

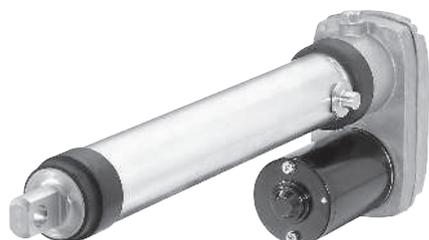

## Standard Features and Benefits

- Strong and versatile heavy duty actuator
- High duty cycle
- Highly efficient ball screw drive system
- Overload clutch for mid and end of stroke protection
- Stroke lengths up to 36 inch (914 mm)
- Three different input voltages to choose from
- Motor with thermal switch
- Maintenance free
- Large range of options

## General Specifications

Parameter	Electrak.PPA-DC
Screw type	ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake	yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads
Motor connector	no
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• end of stroke limit switches</li> <li>• potentiometer</li> <li>• encoder</li> <li>• protective bellows</li> </ul>

» Ordering Key - see page 69

» Glossary - see page 80

» Electric Wiring Diagram - see page 49

## Performance Specifications


Parameter		PPA-DC
Maximum load, dynamic / static	[N]	3330 / 13350
PPA •• -18B65		6670 / 13350
PPA •• -58B65		
Speed, at no load / at maximum load	[mm/s]	32 / 28
PPA12(24/36)-18B65		12 / 9
PPA12(24/36)-58B65		
Available input voltages	[Vdc]	12, 24, 36
Standard stroke lengths	[inch]	4, 8, 12, 18, 24, 36
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	30
End play, maximum	[mm]	1
Restraining torque	[Nm]	11
PPA •• -18B65		22
PPA •• -58B65		
Lead cross section	[mm <sup>2</sup> ]	2
Lead length	[mm]	420
Protection class		IP52

## Compatible Controls

Control.model	See.page
DPDT switch	53
AC-063	54
DCG-190	58

# Electrak.PPA-DC

12, 24 and 36 Vdc - load up to 6670 N

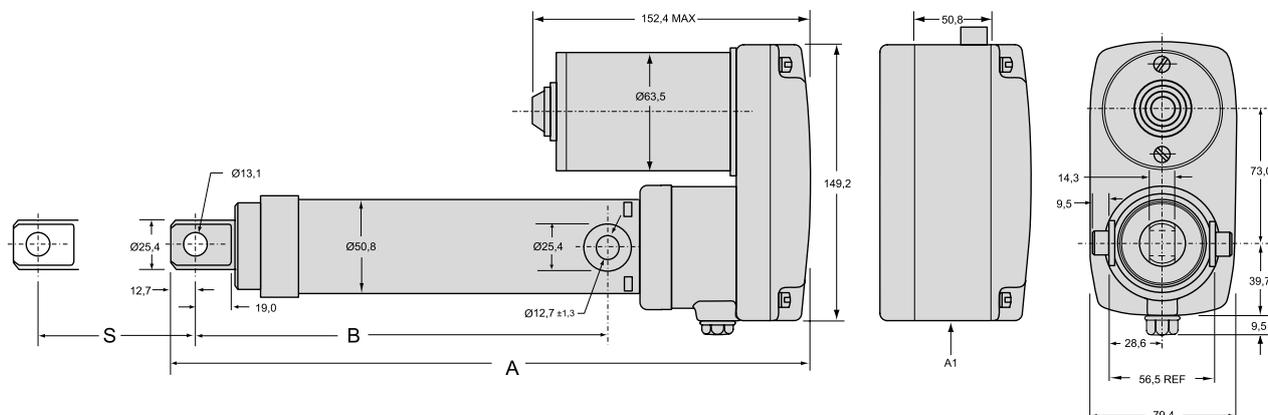


S: stroke  
A: retracted length

B: retracted length to trunnions  
A1: housing dimensions for limit switch, encoder or potentiometer options

Stroke (S)	[inch.(mm)]	4 (101,6)	8 (203,2)	12 (304,8)	18 (457,2)	24 (609,6)	36 (914,4)
Retracted length (A) without options	[mm]	348,0	449,6	551,2	754,4	906,8	1211,6
Retracted length (A) with limit switch, encoder or potentiometer	[mm]	398,8	500,4	602,0	805,2	957,6	1262,4
Retracted length to trunnions (B)	[mm]	223,5	352,1	426,7	629,9	782,3	1087,1
Weight	[kg]	4,5	5,3	6,0	7,2	8,4	10,8
Add on weight for limit switch, encoder or potentiometer	[kg]	0,5	0,5	0,5	0,5	0,5	0,5

## Performance Diagrams

Speed and Current vs. Load

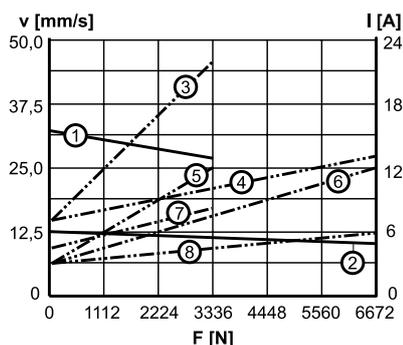

V: speed I: current F: load

- 1: speed PPA •• -18B65
- 2: speed PPA •• -58B65
- 3: current 12 Vdc, PPA12-18B65
- 4: current 12 Vdc, PPA12-58B65
- 5: current 24 Vdc, PPA24-18B65
- 6: current 24 Vdc, PPA24-58B65
- 7: current 36 Vdc, PPA36-18B65
- 8: current 36 Vdc, PPA36-58B65

# Electrak.10

12, 24 and 36 Vdc - load up to 6800 N



## Standard Features and Benefits

- Robust, strong and reliable
- Withstands very harsh environments
- Stainless steel extension tube
- Acme or ball screw models
- Overload clutch for mid and end of stroke protection
- Motor with thermal switch
- Maintenance free

## General Specifications

Parameter	.Electrak.10
Screw type	acme or ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	AMP connector with housing p/n 180908-5 with male terminals p/n 42098-2
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• potentiometer</li> <li>• manual override</li> </ul>

» Ordering Key - see page 70

» Glossary - see page 80

» Electric Wiring Diagram - see page 48

## Performance Specifications

Parameter		.Electrak.10
Maximum load, dynamic / static	[N]	
D •• -05A5 (acme screw)		1100 / 11350
D •• -10A5 (acme screw)		2250 / 11350
D •• -20A5 (acme screw)		2250 / 11350
D •• -05B5 (ball screw)		2250 / 18000
D •• -10B5 (ball screw)		4500 / 18000
D •• -20B5 (ball screw)		4500 / 18000
D •• -21B5 (ball screw)		6800 / 18000
Speed, at no load / at maximum load	[mm/s]	
D •• -05A5 (acme screw)		54 / 32
D •• -10A5 (acme screw)		30 / 18
D •• -20A5 (acme screw)		15 / 12
D •• -05B5 (ball screw)		61 / 37
D •• -10B5 (ball screw)		30 / 19
D •• -20B5 (ball screw)		15 / 12
D •• -21B5 (ball screw)		15 / 11
Available input voltages	[Vdc]	12, 24, 36 *
Standard stroke lengths	[inch]	4, 6, 8, 10, 12, 14, 16, 18, 20, 24
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	25
End play, maximum	[mm]	1,0
Restraining torque	[Nm]	11,3
Lead cross section	[mm <sup>2</sup> ]	2
Lead length	[mm]	165
Protection class		IP65


\* Other input voltages available on request, contact customer support.

## Compatible Controls

Control.model	See.page
DPDT switch	53
AC-063	54
DCG-190	58

# Electrak.10

12, 24 and 36 Vdc - load up to 6800 N

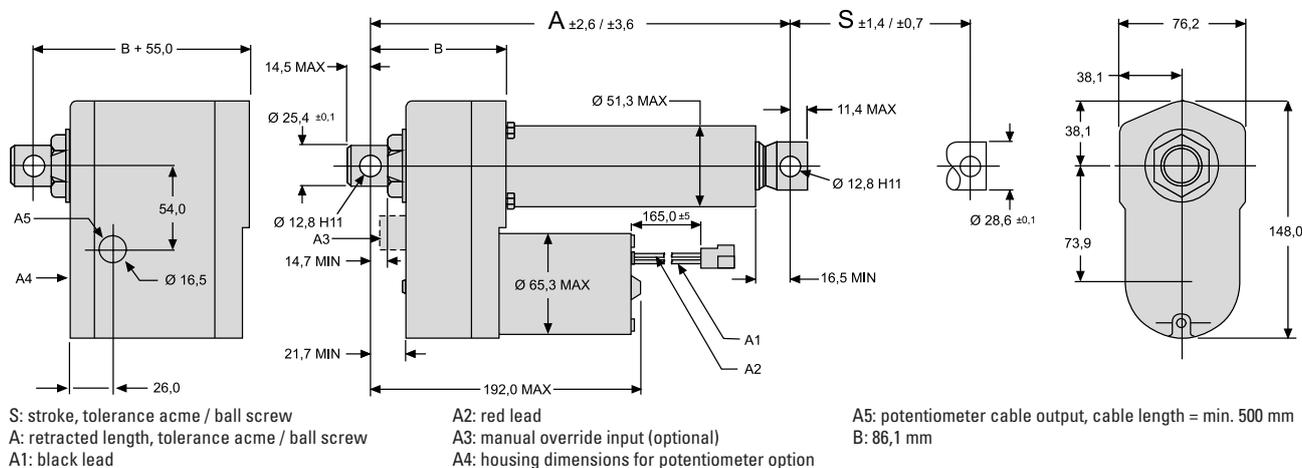


Stroke (S)	[inch.(mm)]	4 (101,6)	6 (152,4)	8 (203,2)	10 (254,0)	12 (304,8)	14 (355,6)	16 (406,4)	18 (457,2)	20 (508,0)	24 (609,6)
Retracted length, acme screw models (A)	[mm]	262,3	313,1	363,9	414,7	465,5	567,1	617,9	668,7	719,5	821,1
Retracted length, ball screw models (A)	[mm]	302,3	353,1	403,9	454,7	505,5	607,1	657,9	708,7	759,5	861,1
Add on length for potentiometer*	[mm]	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0
Weight, acme screw models	[kg]	4,5	4,7	4,9	5,0	5,2	5,4	5,5	5,7	5,8	6,2
Weight, ball screw models	[kg]	5,1	5,3	5,5	5,6	5,8	5,9	6,1	6,3	6,4	6,8
Add on weight for potentiometer*	[kg]	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3
Potentiometer resistance change*	[ohm/mm]	39	39	39	39	20	20	20	20	20	10

\* Potentiometer is optional

## Performance Diagrams


Acme Screw Models  
Speed and Current vs. Load

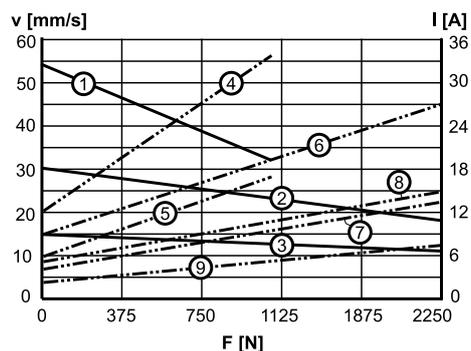

V: speed  
 I: current  
 F: load

1: speed D •• -05A5  
 2: speed D •• -10A5  
 3: speed D •• -20A5  
 4: current 12 Vdc, D12-05A5  
 5: current 24 Vdc, D24-05A5  
 6: current 12 Vdc, D12-10A5  
 7: current 24 Vdc, D24-10A5  
 8: current 12 Vdc, D12-20A5  
 9: current 24 Vdc, D24-20A5

Ball Screw Models  
Speed and Current vs. Load

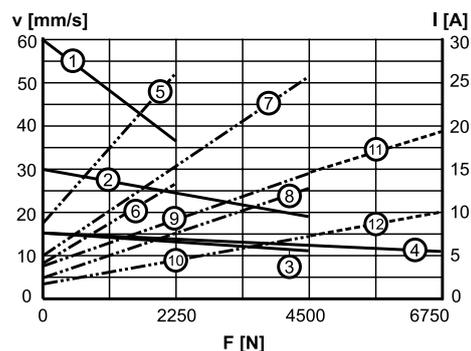

V: speed  
 I: current  
 F: load

1: speed D •• -05B5  
 2: speed D •• -10B5  
 3: speed D •• -20B5  
 4: speed D •• -21B5  
 5: current 12 Vdc, D12-05B5  
 6: current 24 Vdc, D24-05B5  
 7: current 12 Vdc, D12-10B5  
 8: current 24 Vdc, D24-10B5  
 9: current 12 Vdc, D12-20B5  
 10: current 24 Vdc, D24-20B5  
 11: current 12 Vdc, D12-21B5  
 12: current 24 Vdc, D24-21B5

# Electrak.LA14

12, 24 and 36 Vdc - load up to 6800 N



## Standard Features and Benefits

- Rugged and robust
- Withstands very harsh environments
- Stainless steel extension tube
- Corrosion free aluminium cover tube
- Acme or ball screw drive
- Trunnion mounting possible
- Overload clutch for mid and end of stroke protection
- T-slot grooves in the cover tube for magnetic sensors
- Motor with thermal switch
- Maintenance free

## General Specifications

Parameter	.Electrak.LA14
Screw type	acme or ball
Internally restrained	yes
Manual override	no, optional
Dynamic braking	no
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	AMP connector with housing p/n 180908-5 with male terminals p/n 42098-2
Certificates	CE
Options	• potentiometer • manual override

» Ordering Key - see page 71

» Glossary - see page 80

» Electric Wiring Diagram - see page 48

## Performance Specifications

Parameter		.Electrak.LA14
Maximum load, dynamic / static	[N]	
DA •• -05A65M (acme screw)		1100 / 11350
DA •• -10A65M (acme screw)		2250 / 11350
DA •• -20A65M (acme screw)		2250 / 11350
DA •• -05B65M (ball screw)		2250 / 18000
DA •• -10B65M (ball screw)		4500 / 18000
DA •• -20B65M (ball screw)		4500 / 18000
DA •• -21B65M (ball screw)		6800 / 18000
Speed, at no load / at maximum load	[mm/s]	
DA •• -05A65M (acme screw)		54 / 32
DA •• -10A65M (acme screw)		30 / 18
DA •• -20A65M (acme screw)		15 / 12
DA •• -05B65M (ball screw)		61 / 37
DA •• -10B65M (ball screw)		30 / 19
DA •• -20B65M (ball screw)		15 / 12
DA •• -21B65M (ball screw)		15 / 11
Available input voltages	[Vdc]	12, 24, 36 *
Standard stroke lengths	[mm]	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	25
End play, maximum	[mm]	1,0
Restraining torque	[Nm]	0
Lead cross section	[mm <sup>2</sup> ]	2
Lead length	[mm]	165
Protection class		IP65


\* Other input voltages available on request, contact customer support.

## Compatible Controls

Control.model	See.page
DPDT switch	53
AC-063	54
DCG-190	58

# Electrak.LA14

12, 24 and 36 Vdc - load up to 6800 N

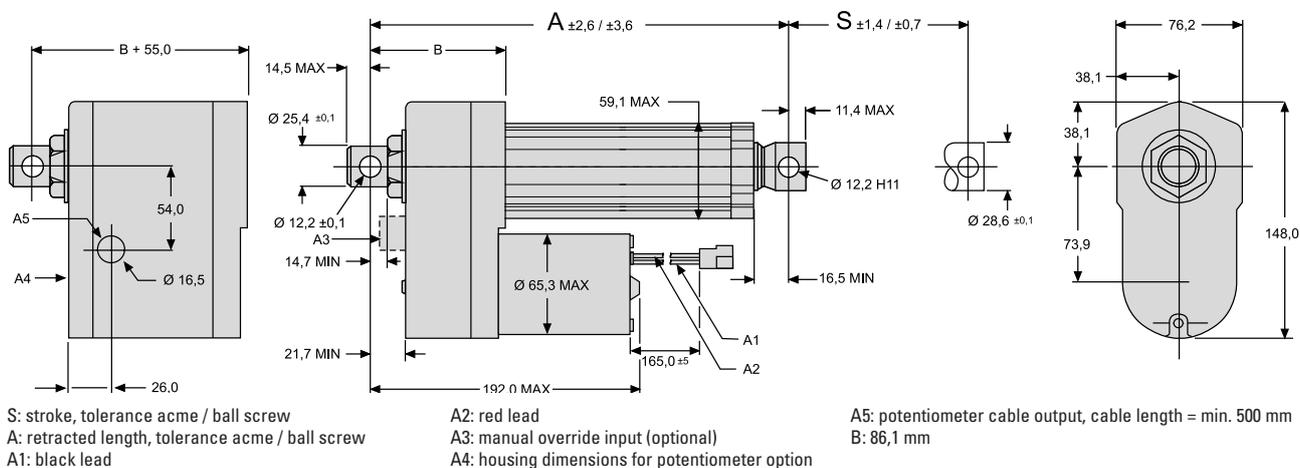


Stroke (S)	[mm]	50	100	150	200	250	300	350	400	450	500	550	600
Retracted length, acme screw models (A)	[mm]	216,7	266,7	316,7	366,7	416,7	466,7	566,7	616,7	666,7	716,7	766,7	816,7
Retracted length, ball screw models (A)	[mm]	269,6	319,6	369,6	419,6	469,6	519,6	619,6	669,6	719,6	769,6	819,6	869,6
Add on length for potentiometer*	[mm]	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0
Weight, acme screw models	[kg]	4,5	4,7	4,9	5,1	5,3	5,5	5,8	6,0	6,2	6,4	6,6	6,8
Weight, ball screw models	[kg]	5,3	5,5	5,7	5,9	6,1	6,3	6,6	6,8	7,0	7,2	7,4	7,6
Add on weight for potentiometer*	[kg]	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3
Potentiometer resistance change*	[ohm/mm]	39	39	39	39	39	20	20	20	20	20	10	10

\* Potentiometer is optional

## Performance Diagrams


Acme Screw Models  
Speed and Current vs. Load

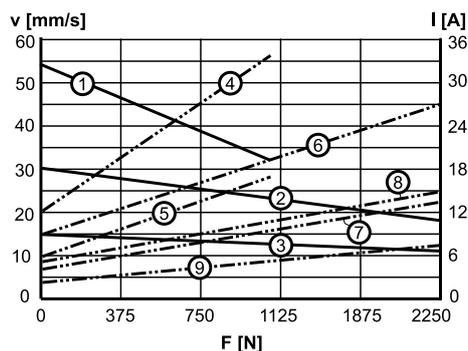

V: speed  
I: current  
F: load

1: speed DA •• -05A65M  
2: speed DA •• -10A65M  
3: speed DA •• -20A65M  
4: current 12 Vdc, DA12-05A65M  
5: current 24 Vdc, DA24-05A65M  
6: current 12 Vdc, DA12-10A65M  
7: current 24 Vdc, DA24-10A65M  
8: current 12 Vdc, DA12-20A65M  
9: current 24 Vdc, DA24-20A65M

Ball Screw Models  
Speed and Current vs. Load

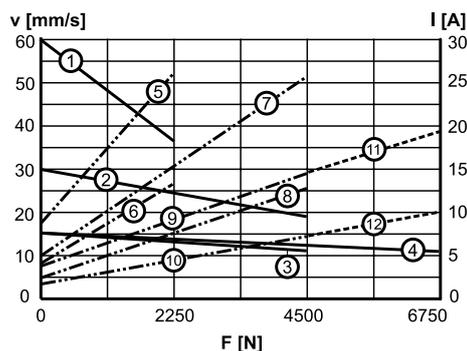

V: speed  
I: current  
F: load

1: speed DA •• -05B65M  
2: speed DA •• -10B65M  
3: speed DA •• -20B65M  
4: current 12 Vdc, DA12-21B65M  
5: current 12 Vdc, DA12-05B65M  
6: current 24 Vdc, DA24-05B65M  
7: current 12 Vdc, DA12-10B65M  
8: current 24 Vdc, DA24-10B65M  
9: current 12 Vdc, DA12-20B65M  
10: current 24 Vdc, DA24-20B65M  
11: current 12 Vdc, DA12-21B65M  
12: current 24 Vdc, DA24-21B65M

# Electrak.Pro

12 and 24 Vdc - load up to 4500 N



» Ordering Key - see page 72

» Glossary - see page 80

» Electric Wiring Diagram - see page 48

## Standard Features and Benefits

- Designed for heavy duty operation, IP66 (67) protection
- Optimized overall envelope with minimal retracted length
- Durable and corrosion resistant aluminum housing
- Cover tube and extension tube in stainless steel<sup>2/4/5</sup>
- Acme or ball screw models
- Maintenance free
- Electronic load monitoring (ELM)
- Manual override
- Wide range of options

## General Specifications

Parameter	Electrak.Pro
Screw type	acme or ball
Internally restrained	no / yes <sup>1</sup>
Manual override	yes
Dynamic braking	yes
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	electronic load monitoring
Mid stroke protection	electronic load monitoring
Motor protection	electronic load monitoring
Motor connection	connector integrated in housing
Motor connector	Delphi Metri-Pack 280
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• linear potentiometer<sup>1/2</sup></li> <li>• low current power switching</li> <li>• signal follower input<sup>1/2/</sup></li> <li>• programmable limit switches<sup>1/2</sup></li> <li>• end of stroke indication outputs<sup>1/2</sup></li> <li>• ELM trip indication output</li> <li>• encoder<sup>5</sup></li> <li>• IP67<sup>3</sup></li> <li>• black paint</li> </ul>

## Performance Specifications

Parameter		Electrak.Pro
Maximum load, dynamic / static PR •• 02-2A65 (acme screw) PR •• 05-4A65 (acme screw) PR •• 07-8A65 (acme screw) PR •• 05-2B65 (ball screw) PR •• 10-4B65 (ball screw)	[N]	1125 / 2250 2250 / 4500 3375 / 6750 2250 / 4500 4500 / 9000
Speed, at no load / at maximum load PR •• 02-2A65 (acme screw) PR •• 05-4A65 (acme screw) PR •• 07-8A65 (acme screw) PR •• 05-2B65 (ball screw) PR •• 10-4B65 (ball screw)	[mm/s]	50 / 43 28 / 23 14 / 12 50 / 38 25 / 20
Available input voltages <sup>6</sup>	[Vdc]	12, 24
Standard stroke lengths <sup>4</sup>	[mm]	50, 100, 150, 200, 300
Operating temperature limits	[°C]	-40 – + 85
Full load duty cycle @ 25 °C	[%]	25
End play, maximum	[mm]	1,0
Restraining torque, maximum	[Nm]	17 / 0 <sup>1</sup>
Protection class		IP66 (67) <sup>3</sup>

## Compatible Controls<sup>7</sup>

Control.model	See.page
DPDT switch	53
AC-063	54

<sup>1</sup> Without / with anti-rotation option. When the anti-rotation option is being used, the front adapter cross hole can't be freely rotated. Instead the front cross hole must be ordered in standard position (shown in the drawing) or rotated 90°.

<sup>2</sup> Control options with linear potentiometer (options "L", "P", "R" and "K") requires an aluminum cover tube. Also the anti-rotation option requires an aluminum cover tube. Anti-rotation is required for ball screw units with above options, but optional for acme screw units. Note that a programming unit is necessary for the programmable limit switch option, see page 66.

<sup>3</sup> IP67 requires the mating connector be installed and the factory sealing, including the manual override cover, must not be compromised.


<sup>4</sup> For longer stroke length, contact customer support.

<sup>5</sup> Consult customer support for encoder output data.

<sup>6</sup> Electrak Pro requires, besides the correct input voltage, at least a 600 W power supply or an automotive/marine battery to function properly.

# Electrak.Pro

12 and 24 Vdc - load up to 4500 N

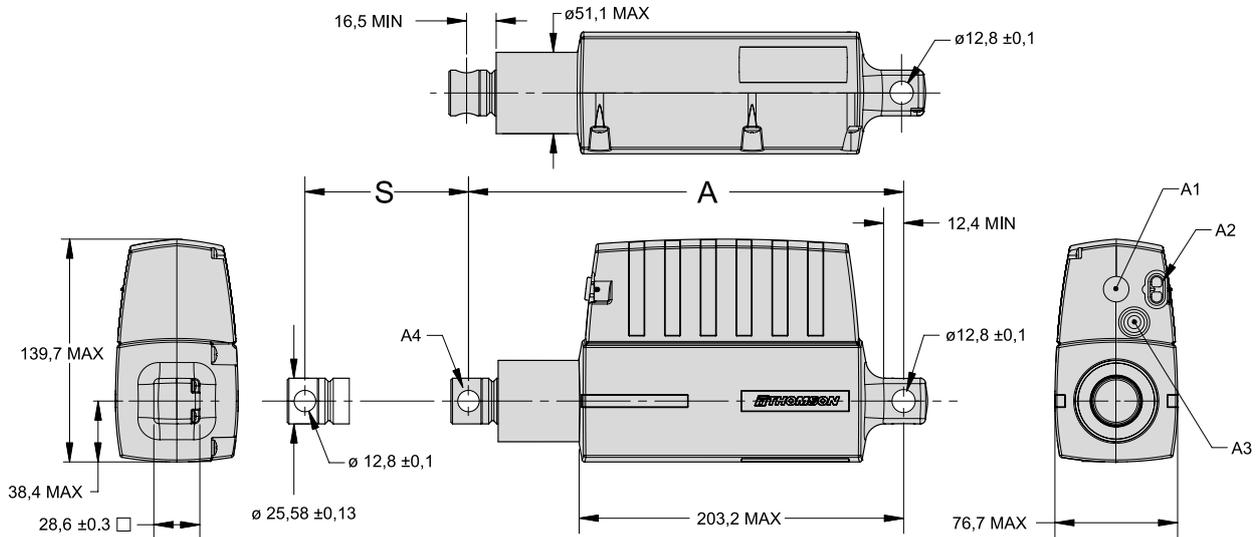


S: stroke  
 A: retracted length  
 A1: manual override cover (manual override requires 5 mm or 3/16 hexagon key to operate)  
 A2: motor connector  
 A3: knock out plug for signal wire exit  
 A4: plated steel front adapter cross hole shown in standard position

Stroke (S)	[mm]	50	100	150	200	300
Retracted length, acme screw models (A)	[mm]	240,3	257,5	307,5	357,5	457,5
Retracted length, ball screw models (A)	[mm]	240,3	289,5	339,5	389,5	489,5
Weight, acme screw models	[kg]	2,9	3,0	3,2	3,4	3,9
Weight, ball screw models	[kg]	3,3	3,4	3,6	3,8	4,1
Potentiometer approx. resistance change*	[ohm/mm]	57,2	36,2	26,5	41,7	29,3
Potentiometer total resistance.	[kohm]	5	5	5	10	10

\* Potentiometer is optional


## Performance Diagrams

Acme Screw Models  
Speed and Current vs. Load

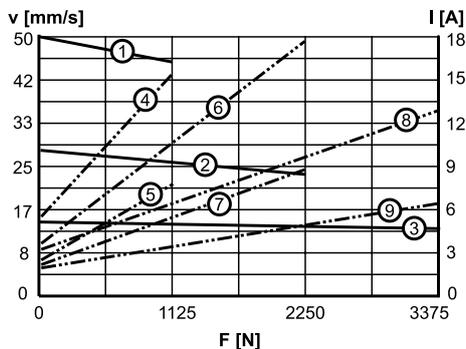

V: speed  
 I: current  
 F: load  
 1: speed PR •• 02-2A65  
 2: speed PR •• 05-4A65  
 3: speed PR •• 07-8A65  
 4: current 12 Vdc, PR1202-2A65  
 5: current 24 Vdc, PR2402-2A65  
 6: current 12 Vdc, PR1205-4A65  
 7: current 24 Vdc, PR2405-4A65  
 8: current 12 Vdc, PR1207-8A65  
 9: current 24 Vdc, PR2407-8A65

Ball Screw Models  
Speed and Current vs. Load

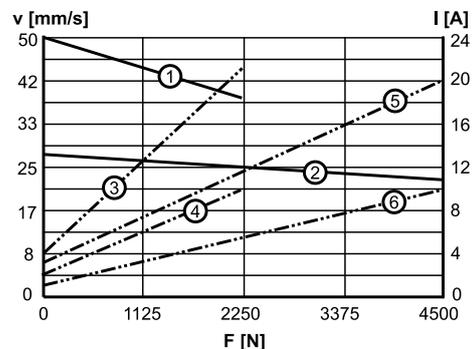

V: speed  
 I: current  
 F: load  
 1: speed PR •• 05-2B65  
 2: speed PR •• 10-4B65  
 3: current 12 Vdc, PR1205-2B65  
 4: current 24 Vdc, PR2405-2B65  
 5: current 12 Vdc, PR1210-4B65  
 6: current 24 Vdc, PR2410-4B65

# Electrak.5

230 and 400 Vac - load up to 6800 N



## Standard Features and Benefits

- Robust, strong and reliable
- Stainless steel extension tube
- Acme or ball screw models
- Overload clutch for mid and end of stroke protection
- Heavy duty motor with thermal switch
- Anti-coast brake for repeatable positioning on all ball screw models. Optional on acme screw models.
- Maintenance free

## General Specifications

Parameter	Electrak.5
Screw type	acme or ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	cable
Motor connector	no
Certificates	UL, CSA, CE
Options	• potentiometer • manual override

» Ordering Key - see page 73

» Glossary - see page 80

» Electric Wiring Diagram - see page 50

## Performance Specifications

Parameter		.Electrak.5
Maximum load, dynamic / static	[N]	
A •• -05A5 (acme screw)*		1100 / 11350
A •• -10A5 (acme screw)		2250 / 11350
A •• -20A5 (acme screw)		2250 / 11350
A •• -05B5 (ball screw)		2250 / 18000
A •• -10B5 (ball screw)		4500 / 18000
A •• -20B5 (ball screw)		4500 / 18000
A •• -21B5 (ball screw)		6800 / 18000
Speed, at no load / at maximum load	[mm/s]	
A •• -05A5 (acme screw)*		48 / 38
A •• -10A5 (acme screw)		30 / 18
A •• -20A5 (acme screw)		15 / 12
A •• -05B5 (ball screw)		61 / 37
A •• -10B5 (ball screw)		30 / 19
A •• -20B5 (ball screw)		15 / 12
A •• -21B5 (ball screw)		15 / 11
Available input voltages	[Vac]	
Single phase		230**
Three phase		400
Input frequency	[Hz]	
1 × 230 Vac model		50/60
3 × 400 Vac model		50
Standard stroke lengths	[inch]	4, 6, 8, 10, 12, 14, 16, 18, 20, 24
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	25
Maximum on time	[s]	45
End play, maximum	[mm]	1,0
Restraining torque	[Nm]	11,3
Lead cross section	[mm <sup>2</sup> ]	1,5
Cable length	[mm]	600
Protection class		IP45

\* Not possible with 400 Vac input voltage.


\*\* 10 µF capacitor required to run the actuator, p/n 9200-448-003

## Compatible Controls

Control.model	See.page
DPDT switch	53

# Electrak.5

230 and 400 Vac - load up to 6800 N

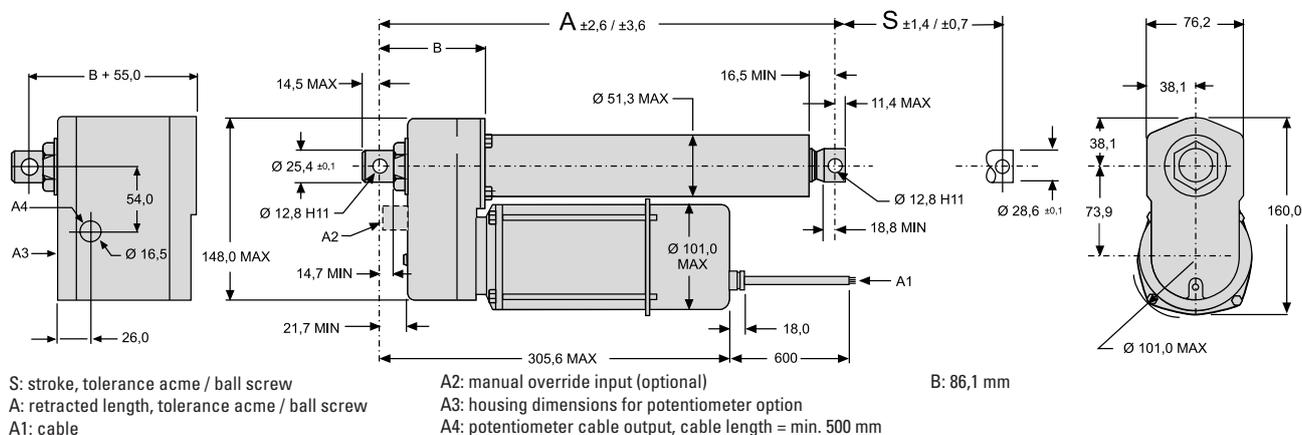


Stroke (S)	[inch.(mm)]	4 (101,6)	6 (152,4)	8 (203,2)	10 (254,0)	12 (304,8)	14 (355,6)	16 (406,4)	18 (457,2)	20 (508,0)	24 (609,6)
Retracted length, acme screw models (A)	[mm]	262,3	313,1	363,9	414,7	465,5	567,1	617,9	668,7	719,5	821,1
Retracted length, ball screw models (A)	[mm]	302,3	353,1	403,9	454,7	505,5	607,1	657,9	708,7	759,5	861,1
Add on length for potentiometer*	[mm]	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0
Weight, acme screw models	[kg]	5,9	6,1	6,3	6,5	6,7	6,9	7,1	7,3	7,5	7,8
Weight, ball screw models	[kg]	6,5	6,7	6,9	7,1	7,3	7,5	7,7	7,9	8,1	8,4
Add on weight for potentiometer*	[kg]	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3
Potentiometer resistance change*	[ohm/mm]	39	39	39	39	20	20	20	20	20	10

\* Potentiometer is optional (NPO, BPO option)


## Performance Diagrams

Acme Screw Models  
Speed and Current vs. Load

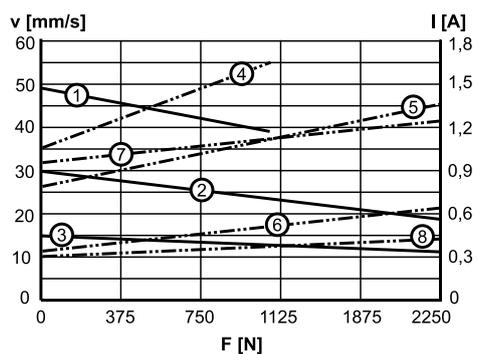

1: speed A22-05A5  
 2: speed A••-10A5  
 3: speed A••-20A5  
 4: current 230 Vac, A22-05A5  
 5: current 230 Vac, A22-10A5  
 6: current 400 Vac, A42-10A5  
 7: current 230 Vac, A22-20A5  
 8: current 400 Vac, A42-20A5

Ball Screw Models  
Speed and Current vs. Load

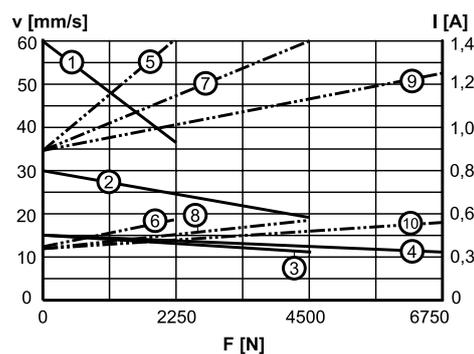

1: speed A22-05B5, A42-05B5  
 2: speed A22-10B5, A42-10B5  
 3: speed A22-20B5, A42-20B5  
 4: speed A22-21B5, A42-21B5  
 5: current 230 Vac, A22-05B5  
 6: current 400 Vac, A42-05B5  
 7: current 230 Vac, A22-10B5, A22-20B5  
 8: current 400 Vac, A42-10B5, A42-20B5  
 9: current 230 Vac, A22-21B5  
 10: current 400 Vac, A42-21B5

# Electrak.LA24

230 and 400 Vac - load up to 6800 N



## Standard Features and Benefits

- Robust, strong and reliable
- Corrosion free aluminium cover tube
- Stainless steel extension tube
- Acme or ball screw models
- Rugged and robust
- Withstands very harsh environments
- Trunnion mounting possible
- Overload clutch for mid and end of stroke protection
- T-slot grooves in the cover tube for magnetic sensors
- Heavy duty motor with thermal switch
- Anti-coast brake for repeatable positioning on all ball screw models. Optional on acme screw models.
- Maintenance free

## General Specifications

Parameter	Electrak.LA24
Screw type	acme or ball
Internally restrained	yes
Manual override	no, optional
Dynamic braking	no
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	cable
Motor connector	no
Certificates	UL, CSA, CE
Options	<ul style="list-style-type: none"> <li>• potentiometer</li> <li>• manual override</li> </ul>

» Ordering Key - see page 74

» Glossary - see page 80

» Electric Wiring Diagram - see page 50

## Performance Specifications

Parameter	Electrak.LA24	
Maximum load, dynamic / static AA •• -05A65M (acme screw)* AA •• -10A65M (acme screw) AA •• -20A65M (acme screw) AA •• -05B65M (ball screw) AA •• -10B65M (ball screw) AA •• -20B65M (ball screw) AA •• -21B65M (ball screw)	[N]	1100 / 11350 2250 / 11350 2250 / 11350 2250 / 18000 4500 / 18000 4500 / 18000 6800 / 18000
Speed, at no load / at maximum load AA •• -05A65M (acme screw)* AA •• -10A65M (acme screw) AA •• -20A65M (acme screw) AA •• -05B65M (ball screw) AA •• -10B65M (ball screw) AA •• -20B65M (ball screw) AA •• -21B65M (ball screw)	[mm/s]	48 / 38 30 / 18 15 / 12 61 / 37 30 / 19 15 / 12 15 / 11
Available input voltages Single phase Three phase	[Vac]	230** 400
Input frequency 1 × 230 Vac model 3 × 400 Vac model	[Hz]	50/60 50
Standard stroke lengths	[inch]	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600
Operating temperature limits	[°C]	-25 – +65
Full load duty cycle @ 25 °C	[%]	25
Maximum on time	[s]	45
End play, maximum	[mm]	1,0
Restraining torque	[Nm]	0
Lead cross section	[mm <sup>2</sup> ]	1,5
Cable length	[mm]	600
Protection class		IP45

\* Not possible with 400 Vac input voltage.


\*\* 10 µF capacitor required to run the actuator, p/n 9200-448-003

## Compatible Controls

Control.model	See.page
DPDT switch	53

# Electrak.LA24

230 and 400 Vac - load up to 6800 N

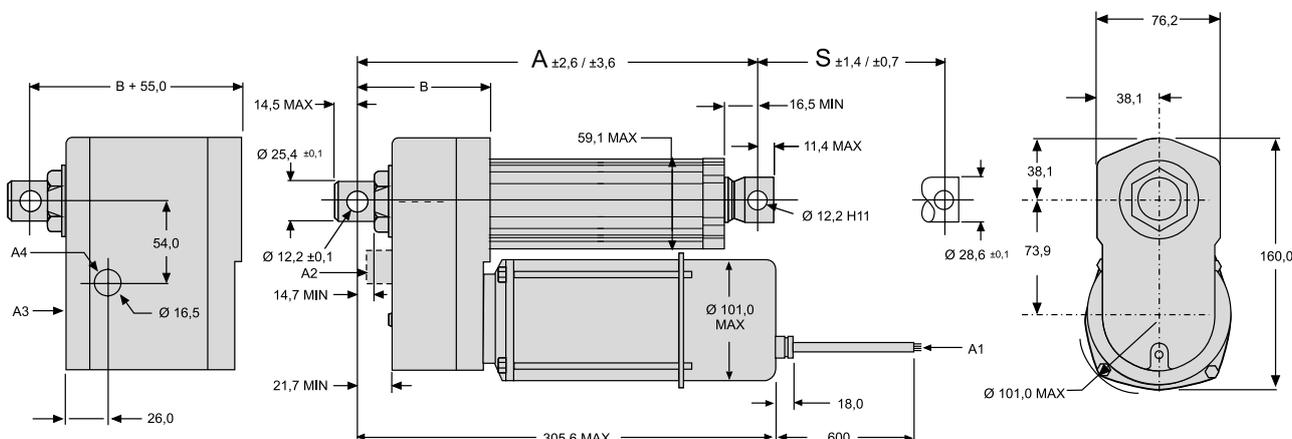


S: stroke, tolerance acme / ball screw  
 A: retracted length, tolerance acme / ball screw  
 A1: cable  
 A2: manual override input (optional)  
 A3: housing dimensions for potentiometer option  
 A4: potentiometer cable output, cable length = min. 500 mm  
 B: 86,1 mm

Stroke (S)	[mm]	50	100	150	200	250	300	350	400	450	500	550	600
Retracted length, acme screw models (A)	[mm]	216,7	266,7	316,7	366,7	416,7	466,7	566,7	616,7	666,7	716,7	766,7	816,7
Retracted length, ball screw models (A)	[mm]	269,6	319,6	369,6	419,6	469,6	519,6	619,6	669,6	719,6	769,6	819,6	869,6
Add on length for potentiometer*	[mm]	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0
Weight, acme screw models	[kg]	6,0	6,2	6,4	6,6	6,8	7,0	7,3	7,5	7,7	7,9	8,1	8,3
Weight, ball screw models	[kg]	6,8	7,0	7,2	7,4	7,6	7,8	8,1	8,3	8,5	8,7	8,9	9,1
Add on weight for potentiometer*	[kg]	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3
Potentiometer resistance change*	[ohm/mm]	39	39	39	39	39	20	20	20	20	20	10	10

\* Potentiometer is optional (NPO, BPO option)


## Performance Diagrams

Acme Screw Models  
Speed and Current vs. Load

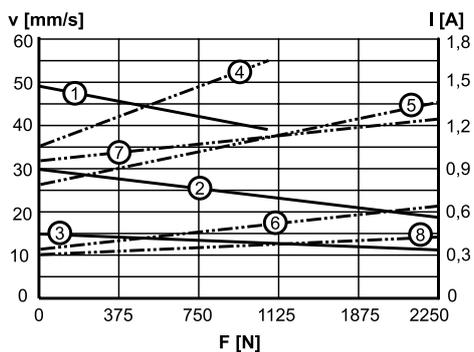

V: speed  
 I: current  
 F: load  
 1: speed AA22-05A65M  
 2: speed AA••-10A65M  
 3: speed AA••-20A65M  
 4: current 230 Vac, AA22-05A65M  
 5: current 230 Vac, AA22-10A65M  
 6: current 400 Vac, AA42-10A65M  
 7: current 230 Vac, AA22-20A65M  
 8: current 400 Vac, AA42-20A65M

Ball Screw Models  
Speed and Current vs. Load

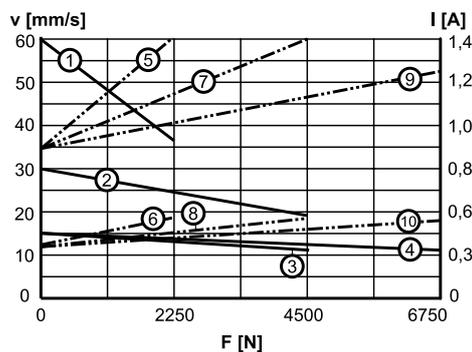

V: speed  
 I: current  
 F: load  
 1: speed AA22-05B65M, AA42-05B65M  
 2: speed AA22-10B65M, AA42-10B65M  
 3: speed AA22-20B65M, AA42-20B65M  
 4: speed AA22-21B65M, AA42-21B65M  
 5: current 230 Vac, AA22-05B65M  
 6: current 400 Vac, AA42-05B65M  
 7: current 230 Vac, AA22-10B65M, AA42-20B65M  
 8: current 400 Vac, AA42-10B65M, AA42-20B65M  
 9: current 230 Vac, AA22-21B65M  
 10: current 400 Vac, AA42-21B65M

# Lifting.Column.TC16

24 Vdc - load up to 2000 N



» Ordering Key - see page 75

» Glossary - see page 80

» Electric Wiring Diagram - see page 49

## Standard Features and Benefits

- Designed for domestic, office and medical applications
- Self supporting column in extruded anodized aluminum
- Low weight and quiet operation
- Smooth operating telescopic screw drive
- High load torque capability
- Very short retracted length
- Very low stroke to retracted length ratio
- Maintenance free
- Dynamic braking and load holding brake
- Integrated end of stroke limit switches
- EMC recognized for medical applications

## General Specifications

Parameter	TC16
Screw type	trapezoidal
Internally restrained	yes
Manual override	no
Dynamic braking	yes
Holding brake	yes
End of stroke protection	end of stroke limit switches
Mid stroke protection	no
Motor protection	no
Motor connection	cable
Motor connector	DIN 41524 8 pin plug
Certificates	CE EMC for medical applications*
Options	encoder

\* Emission: EN 61000-6-3:2001, EN 60601-1-2:1993, EN 55011 Class B,  
Immunity: EN 61000-6-2:2001, EN 61000-4-2, EN 61000-4-3

## Performance Specifications

Parameter	TC16
Maximum load (compression only) [N]	2000
Maximum load torque, dynamic / static [Nm]	150 <sup>1</sup> / 500
Speed, at no load / at maximum load [mm/s]	19 / 15
Available input voltages [Vdc]	24
Maximum standard stroke <sup>2</sup> [mm]	600
Minimum standard stroke [mm]	200
Operating temperature limits [°C]	0 – +40
Full load duty cycle @ 20 °C [%]	15
Maximum on time <sup>2</sup> [s]	60
Restraining torque [Nm]	0
Lead cross section [mm <sup>2</sup> ]	1,5
Cable length [mm]	2000
Protection class	IP44

<sup>1</sup> Higher dynamic load available upon request, contact customer support.


<sup>2</sup> As the maximum stroke is 600 mm the longest possible cycle (full extend and full retract) in theory is  $2 \times 600 \text{ mm} = 1200 \text{ mm}$ . But as the maximum on time is 60 seconds and the speed of the unit varies between 19 - 15 mm/s depending on the load the maximum distance that can be performed in a cycle is between  $60 \text{ s} \times 19 \text{ mm/s}$  and  $60 \text{ s} \times 15 \text{ mm/s} = 1140 - 900 \text{ mm}$  before the unit must come to a rest to avoid overheating. The required resting period in its turn is dependant on the allowed duty cycle. Contact customer support for more information.

## Compatible Controls

Control.model	See.page
DPDT switch	53
DCG-180	58
DCG-280	58
AC-247 ELS	56

# Lifting.Column.TC16

24 Vdc - load up to 2000 N

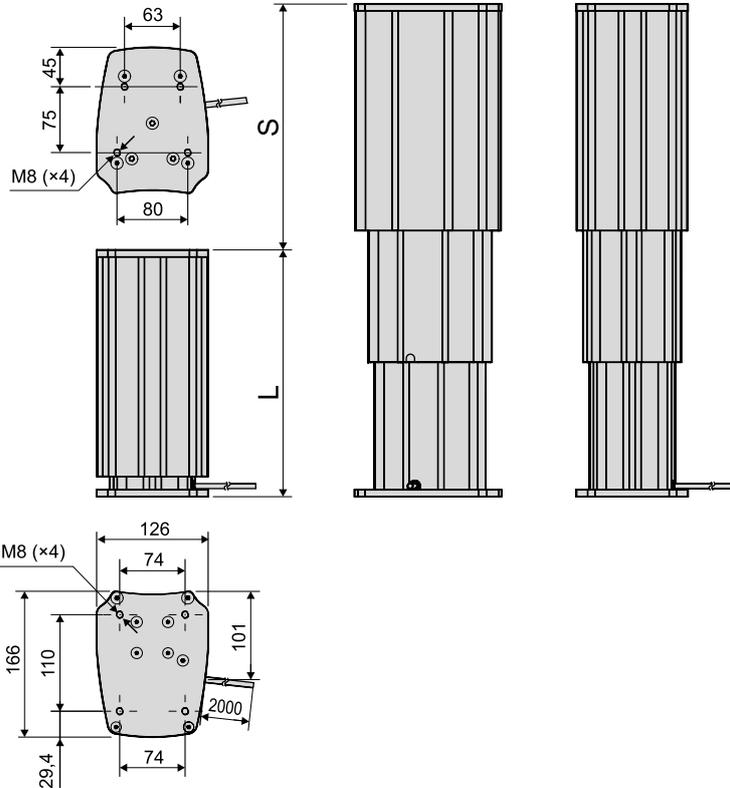


S: stroke  
L: retracted length

<b>Stroke.(S),.minimum.and.maximum</b>	Min. possible stroke (Smin) = 200 mm, Max. possible stroke (Smax) = 600 mm
<b>Retracted.length.(L),.minimum.and.maximum</b>	Min. retracted length (Lmin) = 250 mm, Max. retracted length (Lmax) = 600 mm
<b>Stroke./retracted.length.relationship</b>	Longest possible stroke (S) for a given retracted length (L) [mm] = L [mm] × 2 - 282
<b>Retracted.length./stroke.relationship</b>	Shortest possible retracted length (L) for a given given stroke (S) [mm] = (S [mm] + 282) / 2
<b>Weight</b>	Weight of unit [kg] = 3,4 + L × 0,0203 + S × 0,000755

## Performance Diagrams

Speed and Current vs. Load

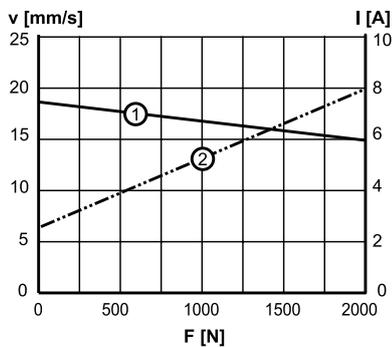

V: speed I: current F: load

1: speed  
2: current

# Lifting.Column.DMD

12, 24 and 36 Vdc - load up to 6800 N



## Standard Features and Benefits

- Designed for industrial use
- Rugged, robust and strong
- Self supporting column in extruded anodized aluminum
- Acme or ball screw drive
- High load torque capability
- Overload clutch for mid and end of stroke protection
- T-slot grooves along the entire profile
- Maintenance free

## General Specifications

Parameter	DMD
Screw type	acme or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	cable
Motor connector	no
Certificates	CE
Options	potentiometer*

\* For encoder feedback, contact customer support.

» Ordering Key - see page 75

» Glossary - see page 80

» Electric Wiring Diagram - see page 49

## Performance Specifications


Parameter		DMD
Maximum load, dynamic / static [N]		
DMD •• -05A5 (acme screw)		1100 / 11350
DMD •• -10A5 (acme screw)		2250 / 11350
DMD •• -20A5 (acme screw)		2250 / 11350
DMD •• -05B5 (ball screw)		2250 / 18000
DMD •• -10B5 (ball screw)		4500 / 18000
DMD •• -20B5 (ball screw)		4500 / 18000
DMD •• -21B5 (ball screw)		6800 / 18000
Maximum load torque, dynamic / static [Nm]		
acme screw models		565 / 565
ball screw models		710 / 710
Speed, at no load / at maximum load [mm/s]		
DMD •• -05A5 (acme screw)		54 / 32
DMD •• -10A5 (acme screw)		30 / 18
DMD •• -20A5 (acme screw)		15 / 12
DMD •• -05B5 (ball screw)		61 / 37
DMD •• -10B5 (ball screw)		30 / 19
DMD •• -20B5 (ball screw)		15 / 12
DMD •• -21B5 (ball screw)		15 / 11
Available input voltages [Vdc]		12, 24, 36
Standard stroke lengths [in]		4, 6, 8, 10, 12, 14, 16, 18, 20, 24
Operating temperature limits [°C]		-25 – +65
Full load duty cycle @ 25 °C [%]		25
End play, maximum [mm]		1,0
Restraining torque [Nm]		0
Lead cross section [mm <sup>2</sup> ]		2,5
Cable length [mm]		2000
Protection class		IP65

## Compatible Controls

Control.model	See.page
DPDT switch	53
DCG-190	58
AC-063	54


# Lifting.Column.DMD

12, 24 and 36 Vdc - load up to 6800 N

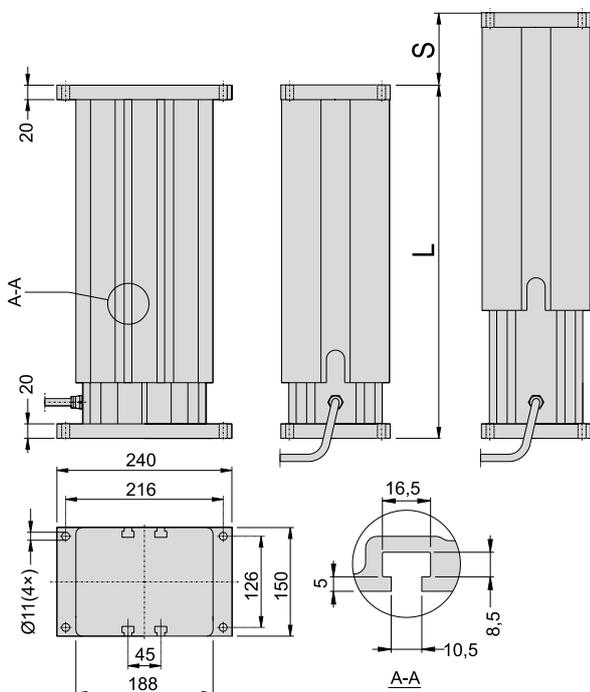

S: stroke L: retracted length

## Off Center Load Capacity

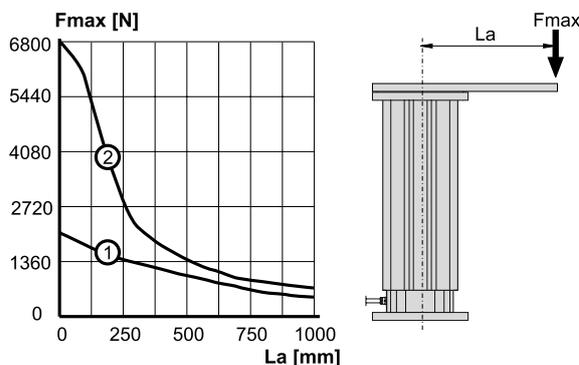

Fmax: maximum load operated La: length of lever arm


1: acme screw models  
2: ball screw models

Stroke (S)	[inch.(mm)]	4 (101,6)	6 (152,4)	8 (203,2)	10 (254,0)	12 (304,8)	14 (355,6)	16 (406,4)	18 (457,2)	20 (508,0)	24 (609,6)
Retracted length (L), acme screw models	[mm]	329,6	380,4	431,2	482,0	532,8	633,6	684,4	735,2	786,0	887,6
Retracted length (L), ball screw models	[mm]	369,6	420,4	471,2	522,0	572,8	673,6	724,4	775,2	826,0	927,6
Add on length for potentiometer*	[mm]	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0
Weight, acme screw models	[kg]	18,7	20,2	21,6	23,1	24,6	27,3	28,7	30,2	31,7	34,6
Weight, ball screw models	[kg]	20,4	21,9	23,4	24,8	26,3	29,0	30,4	31,9	33,4	36,3
Add on weight for potentiometer*	[kg]	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3


\* Potentiometer is optional

## Performance Diagrams

Speed and Current vs. Load - Chart 1

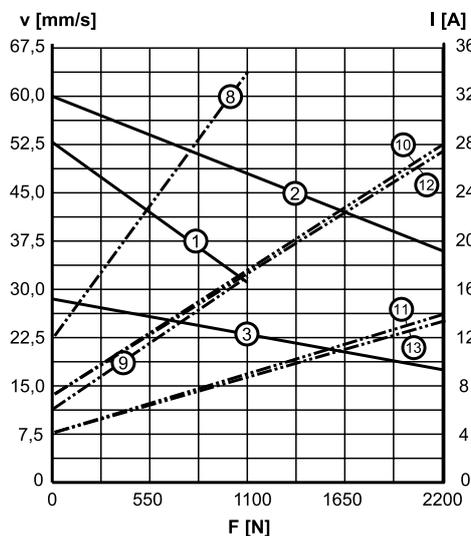

Speed and Current vs. Load - Chart 2

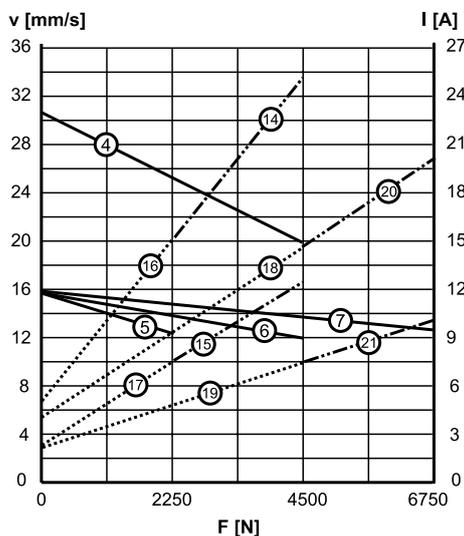

V: speed I: current F: load

- 1: speed DMD ••-05A5 - chart 1
- 2: speed DMD ••-05B5 - chart 1
- 3: speed DMD ••-10A5 - chart 1
- 4: speed DMD ••-10B5 - chart 2
- 5: speed DMD ••-20A5 - chart 2
- 6: speed DMD ••-20B5 - chart 2
- 7: speed DMD ••-21B5 - chart 2
- 8: current DMD12-05A5 - chart 1
- 9: current DMD24-05A5 - chart 1
- 10: current DMD12-05B5 - chart 1
- 11: current DMD24-05B5 - chart 1
- 12: current DMD12-10A5 - chart 1
- 13: current DMD24-10A5 - chart 1
- 14: current DMD12-10B5 - chart 2
- 15: current DMD24-10B5 - chart 2
- 16: current DMD12-20A5 - chart 2
- 17: current DMD24-20A5 - chart 2
- 18: current DMD12-20B5 - chart 2
- 19: current DMD24-20B5 - chart 2
- 20: current DMD12-21B5 - chart 2
- 21: current DMD24-21B5 - chart 2

Contact customer service for data on 36 Vdc models.

# Lifting.Column.DMA

230 and 400 Vac - load up to 6800 N



» Ordering Key - see page 75

» Glossary - see page 80

» Electric Wiring Diagram - see page 50

## Standard Features and Benefits

- Designed for industrial use
- Rugged, robust and strong
- Self supporting column in extruded anodized aluminum
- Acme or ball screw drive
- High load torque capability
- Overload clutch for mid and end of stroke protection
- T-slot grooves along the entire profile
- Maintenance free

## General Specifications

Parameter	DMA
Screw type	acme or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake acme screw models ball screw models	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	cable
Motor connector	no
Certificates	CE
Options	potentiometer

## Performance Specifications

Parameter	DMA
Maximum load, dynamic / static [N] DMA22-05A5 (acme screw)* DMA •• -10A5 (acme screw) DMA •• -20A5 (acme screw) DMA •• -05B5 (ball screw) DMA •• -10B5 (ball screw) DMA •• -20B5 (ball screw) DMA •• -21B5 (ball screw)	1100 / 11350 2250 / 11350 2250 / 11350 2250 / 18000 4500 / 18000 4500 / 18000 6800 / 18000
Maximum load torque, dynamic / static [Nm] acme screw models ball screw models	565 / 565 710 / 710
Speed, at no load / at maximum load [mm/s] DMA22-05A5 (acme screw)* DMA •• -10A5 (acme screw) DMA •• -20A5 (acme screw) DMA •• -05B5 (ball screw) DMA •• -10B5 (ball screw) DMA •• -20B5 (ball screw) DMA •• -21B5 (ball screw)	48 / 38 30 / 18 15 / 12 61 / 37 30 / 19 15 / 12 15 / 11
Available input voltages [Vac] Single phase** Three phase	230 400
Input frequency [Hz] 1 × 230 Vac model 3 × 400 Vac model	50/60 50
Standard stroke lengths [in]	4, 6, 8, 10, 12, 14, 16, 18, 20, 24
Operating temperature limits [°C]	-25 – +65
Maximum on time [s]	45
Full load duty cycle @ 25 °C [%]	25
End play, maximum [mm]	1,0
Restraining torque [Nm]	0
Lead cross section [mm <sup>2</sup> ]	2,5
Cable length [mm]	2000
Protection class	IP45

\* Not possible with 400 Vac input voltage


\*\* 10 µF capacitor required to run the actuator, p/n 9200-448-003

## Compatible Controls

Control.model	See.page
DPDT switch	53



# Lifting.Column.DMA

230 and 400 Vac - load up to 6800 N

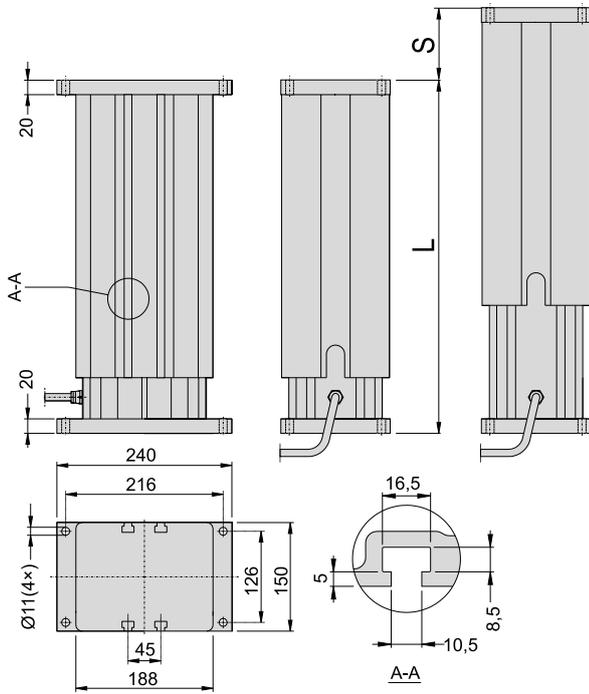

S: stroke L: retracted length

## Off Center Load Capacity

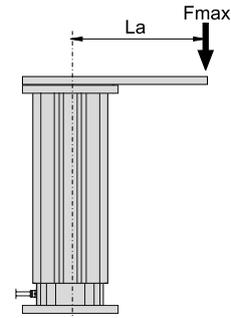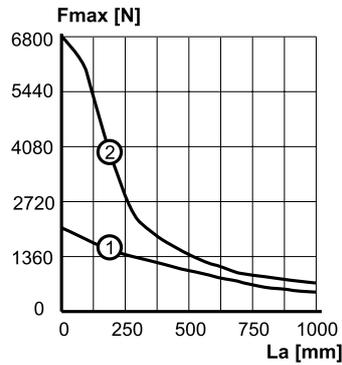


Fmax: maximum load operated La: length of lever arm  
 1: acme screw models  
 2: ball screw models

Stroke (S)	[inch.(mm)]	4 (101,6)	6 (152,4)	8 (203,2)	10 (254,0)	12 (304,8)	14 (355,6)	16 (406,4)	18 (457,2)	20 (508,0)	24 (609,6)
Retracted length (L), acme screw models	[mm]	329,6	380,4	431,2	482,0	532,8	633,6	684,4	735,2	786,0	887,6
Retracted length (L), ball screw models	[mm]	369,6	420,4	471,2	522,0	572,8	673,6	724,4	775,2	826,0	927,6
Add on length for potentiometer*	[mm]	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0	55,0
Weight, acme screw models	[kg]	20,9	22,4	23,8	25,3	26,8	29,5	30,9	32,4	33,9	36,8
Weight, ball screw models	[kg]	22,6	24,1	25,6	27,0	28,5	31,2	32,6	34,1	35,6	38,6
Add on weight for potentiometer*	[kg]	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3	1,3


\* Potentiometer is optional

## Performance Diagrams

Speed and Current vs. Load - Chart 1

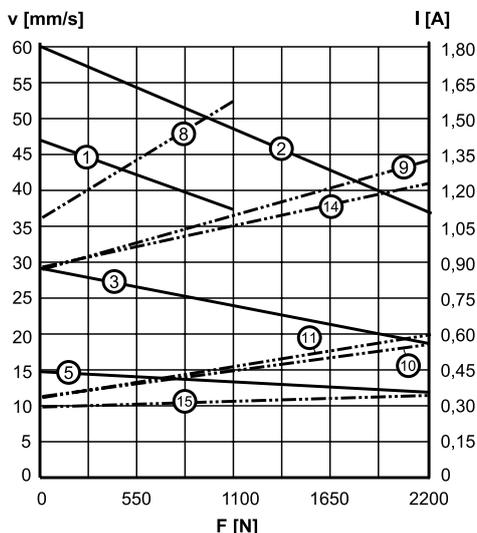

Speed and Current vs. Load - Chart 2

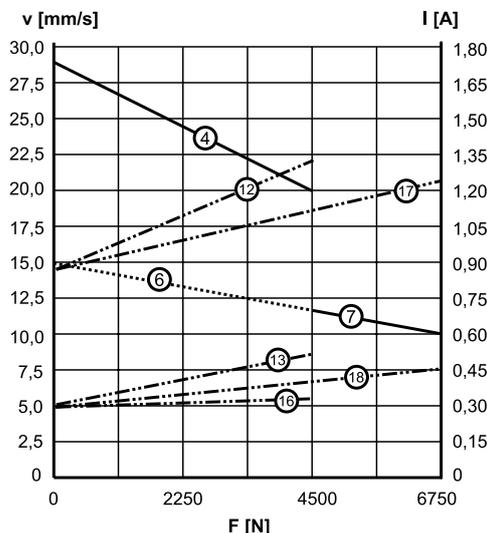

V: speed I: current F: load

- 1: speed DMA22-05A5 - chart 1
- 2: speed DMA 05B5 - chart 1
- 3: speed DMA 10A5 - chart 1
- 4: speed DMA 10B5 - chart 2
- 5: speed DMA 20A5 - chart 1
- 6: speed DMA 20B5 - chart 2
- 7: speed DMA 21B5 - chart 2
- 8: current DMA22-05A5 - chart 1
- 9: current DMA22-05B5 and DMA22-10A5 - chart 1
- 10: current DMA42-05B5 - chart 1
- 11: current DMA42-10A5 - chart 1
- 12: current DMA22-10B5 and DMA22-20B5 - chart 2
- 13: current DMA42-10B5 - chart 2
- 14: current DMA22-20A5 - chart 1
- 15: current DMA42-20A5 - chart 1
- 16: current DMA42-20B5 - chart 2
- 17: current DMA22-21B5 - chart 2
- 18: current DMA42-21B5 - chart 2

# Rodless Actuator LM80-H

## 12 and 24 Vdc - load up to 2000 N



### Standard Features and Benefits

- Rodless actuator for horizontal operation
- For use in domestic, office or medical applications
- Rigid self supporting extruded aluminum profile
- Durable and corrosion free
- Lightweight and quiet operation
- Safety nut on ball screw versions
- Easy and fast T-slot mounting
- Maintenance free

### General Specifications

Parameter	LM80-H
Screw type	trapezoidal or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	no
End of stroke protection	spring loaded soft stop
Mid stroke protection	no
Motor protection	no
Motor connection with motor enclosure no motor enclosure	cable no cable, clips on motor
Motor connector with motor enclosure no motor enclosure	DIN 41524 8 pin plug clips on motor
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• no motor enclosure</li> <li>• manual override</li> <li>• alternative motor positions</li> <li>• stroke over 1500 mm*</li> <li>• encoder *</li> </ul>

\* Contact customer support

» Ordering Key - see page 76

» Glossary - see page 80

» Electric Wiring Diagram - see page 49

### Performance Specifications

Parameter	LM80-H
Maximum load (Fb) [N]	2000
Maximum load torque (Mb) [Nm]	DT••-T68M ••••• H 250 DT••-B61M ••••• H 400 DT••-B62M ••••• H 180 DT••-B65M ••••• H 750
Speed, at no load / at maximum load [mm/s]	DT••-T68M ••••• H 44 / 37 DT••-B61M ••••• H 55 / 50 DT12 -B62M ••••• H 110 / 73 DT24 -B62M ••••• H 110 / 87 DT••-B65M ••••• H 28 / 28
Available input voltages [Vdc]	12, 24
Standard stroke lengths [mm]	500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500
Operating temperature limits [°C]	0 – +40
Full load duty cycle @ 20 °C [%]	15
Maximum on time [s]	120
End play, maximum [mm]	1,0
Restraining torque [Nm]	0
Lead cross section [mm <sup>2</sup> ] with / without motor enclosure	1,5 / –
Cable length [mm] with / without motor enclosure	2000 / –
Protection class with / without motor enclosure	IP44 / IP33


### Compatible Controls

Control.model	See.page
DPDT switch	53
DCG-170	58
AC-247 ELS	56

# Rodless Actuator LM80-H

12 and 24 Vdc - load up to 2000 N


**!** Note: this unit may only be mounted horizontally.

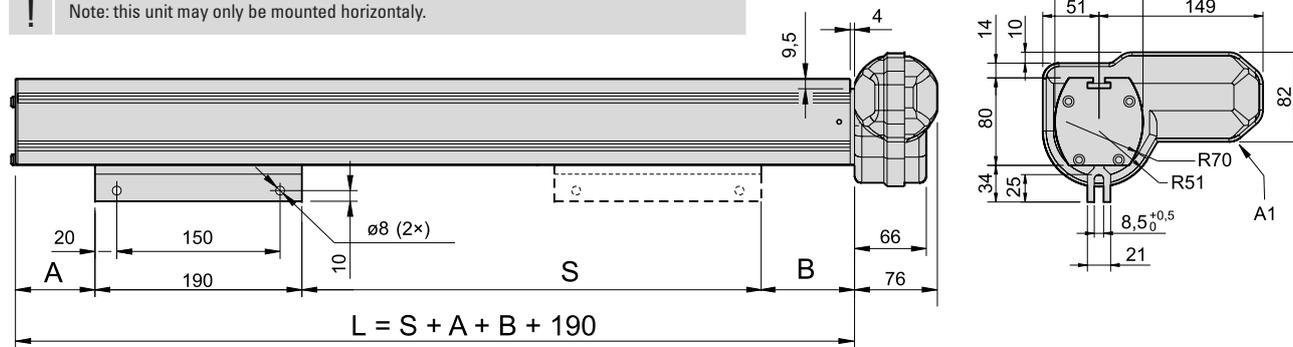

S: stroke  
L: length of profile  
A1: motor shown in position A (standard position)


Stroke.(S).	[mm]	500	600	700	800	900	1000	1100	1200	1300	1400	1500
<b>Dimensions.(A)./(B).</b>	[mm]											
..DT••-T68M ••••• H		54,0 / 77,0										
DT••-B61M ••••• H		102,0 / 77,0										
DT••-B62M ••••• H		102,0 / 77,0										
DT••-B65M ••••• H..		79,0 / 77,0										
<b>Weight</b>	[kg]											
..DT••-T68M ••••• H		11,2	13,1	14,8	16,6	18,1	20,2	22,0	23,8	25,5	27,4	29,1
DT••-B61M ••••• H		12,1	13,9	15,7	17,5	19,3	21,0	22,9	24,6	26,3	28,2	30,0
DT••-B62M ••••• H		12,1	13,9	15,7	17,5	19,3	21,0	22,9	24,6	26,3	28,2	30,0
DT••-B65M ••••• H.		11,7	13,5	15,3	17,1	18,9	20,6	22,4	24,2	26,0	27,8	29,6

## Performance Diagrams

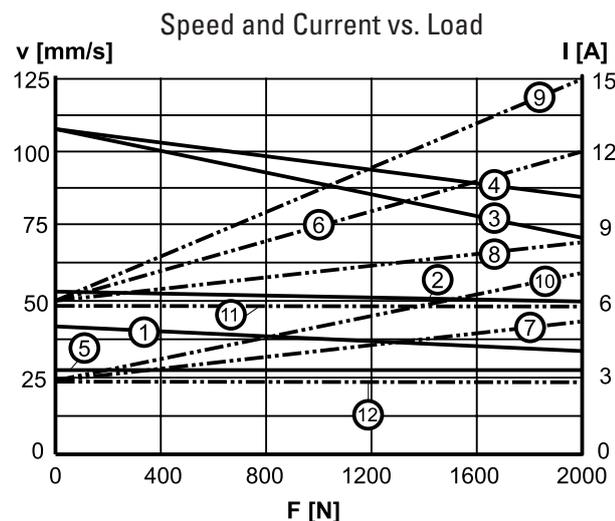


- V: speed I: current F: load
- 1: speed DT••-T68M ••••• H
  - 2: speed DT••-B61M ••••• H
  - 3: speed DT12-B62M ••••• H
  - 4: speed DT24-B62M ••••• H
  - 5: speed DT••-B65M ••••• H
  - 6: current DT12-T68M ••••• H
  - 7: current DT24-T68M ••••• H and DT24-B61M ••••• H
  - 8: current DT12-B61M ••••• H
  - 9: current DT12-B62M ••••• H
  - 10: current DT24-B62M ••••• H
  - 11: current DT12-B65M ••••• H
  - 12: current DT24-B65M ••••• H

## Definition of Forces

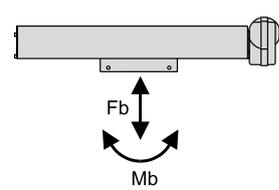

## Deflection of Profile

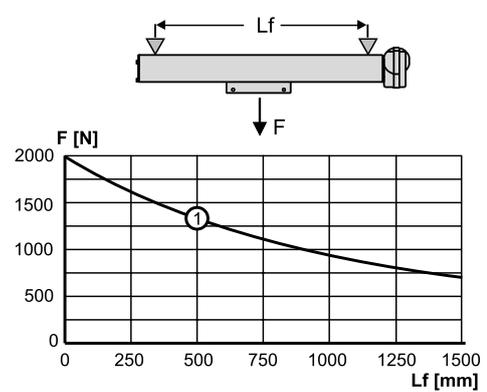

F: load Lf: distance between mounting points  
1: maximum allowed deflection

# Rodless Actuator LM80-V

## 12 and 24 Vdc - load up to 2000 N



### Standard Features and Benefits

- Rodless actuator for vertical operation with motor down
- For use in domestic, office or medical applications
- Rigid self supporting extruded aluminum profile
- Durable and corrosion free
- Holding brake prevents downward motion at power off
- Lightweight and quiet operation
- Safety nut on ball screw versions
- Easy and fast T-slot mounting
- Optional spline safety function
- Maintenance free

### General Specifications

Parameter	LM80-V
Screw type	trapezoidal or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	yes
End of stroke protection	spring loaded soft stop
Mid stroke protection	no
Motor protection	no
Motor connection with motor enclosure no motor enclosure	cable no cable, clips on motor
Motor connector with motor enclosure no motor enclosure	DIN 41524 8 pin plug clips on motor
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• no motor enclosure</li> <li>• manual override</li> <li>• alternative motor positions</li> <li>• spline safety function</li> <li>• stroke over 1500 mm*</li> <li>• encoder *</li> </ul>

\* Contact customer support

» Ordering Key - see page 76  
» Glossary - see page 80  
» Electric Wiring Diagram - see page 49

### Performance Specifications

Parameter		LM80-V
Maximum load (Fa)	[N]	
DT••-T68M ••••• V(F)		650
DT••-B61M ••••• V(F)		1000
DT••-B62M ••••• V(F)		450
DT••-B65M ••••• V(F)		2000
Maximum load torque (Ma)	[Nm]	
DT••-T68M ••••• V(F)		250
DT••-B61M ••••• V(F)		400
DT••-B62M ••••• V(F)		180
DT••-B65M ••••• V(F)		750
Speed, at no load / at maximum load	[mm/s]	
DT12 -T68M ••••• V(F)		44 / 29
DT24 -T68M ••••• V(F)		44 / 35
DT12 -B61M ••••• V(F)		55 / 37
DT24 -B61M ••••• V(F)		55 / 43
DT12 -B62M ••••• V(F)		110 / 67
DT24 -B62M ••••• V(F)		110 / 83
DT12 -B65M ••••• V(F)		28 / 19
DT24 -B65M ••••• V(F)		28 / 22
Available input voltages	[Vdc]	12, 24
Standard stroke lengths	[mm]	500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500
Operating temperature limits	[°C]	0 – +40
Full load duty cycle @ 20 °C	[%]	15
Maximum on time	[s]	120
Restraining torque	[Nm]	0
Lead cross section with / without motor enclosure	[mm <sup>2</sup> ]	1,5 / –
Cable length with / without motor enclosure	[mm]	2000 / –
Protection class with / without motor enclosure		IP44 / IP33



### Compatible Controls

Control.model	See.page
DPDT switch	53
DCG-160	58
AC-247 ELS	56

# Rodless Actuator LM80-V

12 and 24 Vdc - load up to 2000 N

**!** Note: this unit may only be mounted vertically with the motor down even if drawing shows it horizontally.

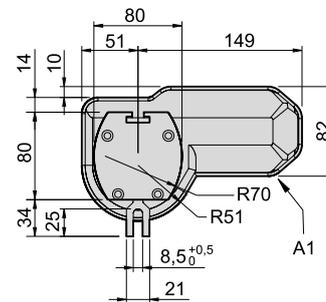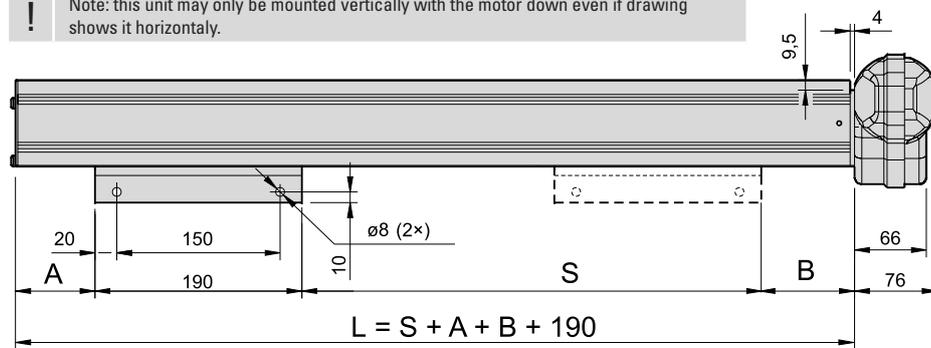



S: stroke  
L: length of profile  
A1: motor shown in position A (standard position)

Stroke.(S.)	[mm]	500	600	700	800	900	1000	1100	1200	1300	1400	1500
<b>Dimensions.(A)./(B)</b>	<b>[mm]</b>											
..DT••-T68M•••••V		50,0 / 71,0										
DT••-B61M•••••V		53,0 / 120,0										
DT••-B62M•••••V		53,0 / 120,0										
DT••-B65M•••••V..		53,0 / 97,0										
..DT••-T68M•••••F		50,0 / 90,0										
DT••-B61M•••••F		53,0 / 144,0										
DT••-B62M•••••F		53,0 / 144,0										
DT••-B65M•••••F..		53,0 / 126,0										
<b>Weight*</b>	<b>[kg]</b>	11,1	12,9	14,7	16,5	18,2	20,0	21,8	23,6	25,4	27,2	28,9
..DT••-T68M•••••V		11,6	13,4	15,2	17,0	18,7	20,5	22,3	24,1	25,9	27,7	29,5
DT••-B61M•••••V		11,6	13,4	15,2	17,0	18,7	20,5	22,3	24,1	25,9	27,7	29,5
DT••-B62M•••••V		12,0	13,8	15,6	17,6	19,3	21,1	22,9	24,7	26,5	28,2	30,1
DT••-B65M•••••V												

\* Add 0,5 kg to the below weights to get the weights for DT••-T68M•••••F, DT••-B61M•••••F, DT••-B62M•••••F and DT••-B65M•••••F.

## Performance Diagrams

## Definition of Forces

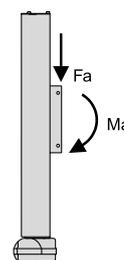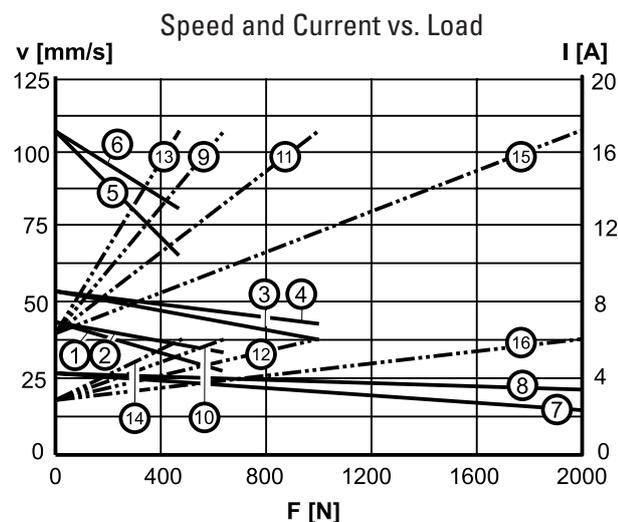

- V: speed I: current F: load
- 1: speed DT12-T68M•••••V(F)
  - 2: speed DT24-T68M•••••V(F)
  - 3: speed DT12-B61M•••••V(F)
  - 4: speed DT24-B61M•••••V(F)
  - 5: speed DT12-B62M•••••V(F)
  - 6: speed DT24-B62M•••••V(F)
  - 7: speed DT12-B65M•••••V(F)
  - 8: speed DT24-B65M•••••V(F)
  - 9: current DT12-T68M•••••V(F)
  - 10: current DT24-T68M•••••V(F)
  - 11: current DT12-B61M•••••V(F)
  - 12: current DT24-B61M•••••V(F)
  - 13: current DT12-B62M•••••V(F)
  - 14: current DT24-B62M•••••V(F)
  - 15: current DT12-B65M•••••V(F)
  - 16: current DT24-B65M•••••V(F)

# Rodless Actuator LM80-I

24 Vdc - load up to 2000 N



## Standard Features and Benefits

- Rodless actuator for vertical operation with motor down
- For use in domestic, office or medical applications
- Rigid self supporting extruded aluminum profile
- Durable and corrosion free
- Holding brake prevents downward motion at power off
- Lightweight and quiet operation
- Safety nut on ball screw versions
- Easy and fast T-slot mounting
- Maintenance free

## General Specifications

Parameter	LM80-I
Screw type	trapezoidal or ball
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	yes
End of stroke protection	spring loaded soft stop
Mid stroke protection	no
Motor protection	no
Motor connection	cable
Motor connector	DIN 41524 8 pin plug
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• manual override</li> <li>• encoder</li> <li>• stroke over 1500 mm*</li> </ul>

\* Contact customer support

» Ordering Key - see page 77

» Glossary - see page 80

» Electric Wiring Diagram - see page 49

## Performance Specifications

Parameter	LM80-I
Maximum load (Fa) [N]	
DT24-T68M ••• GCV	650
DT24-B61M ••• GCV	1000
DT24-B62M ••• GCV	450
DT24-B65M ••• GCV	2000
Maximum load torque (Ma) [Nm]	
DT24-T68M ••• GCV	250
DT24-B61M ••• GCV	400
DT24-B62M ••• GCV	180
DT24-B65M ••• GCV	750
Speed, at no load / at maximum load [mm/s]	
DT24-T68M ••• GCV	24 / 22
DT24-B61M ••• GCV	31 / 27
DT24-B62M ••• GCV	61 / 55
DT24-B65M ••• GCV	15 / 13
Available input voltages [Vdc]	24
Standard stroke lengths [mm]	500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500
Operating temperature limits [°C]	0 – +40
Full load duty cycle @ 20 °C [%]	15
Maximum on time [s]	120
Restraining torque [Nm]	0
Lead cross section [mm <sup>2</sup> ]	1,5
Cable length [mm]	2000
Protection class	IP44


## Compatible Controls

Control.model	See.page
DPDT switch	53
DCG-180	58
DCG-260	58
AC-247 ELS	56

# Rodless Actuator LM80-I

24 Vdc - load up to 2000 N


**!** Note: this unit may only be mounted vertically with the motor down even if drawing shows it horizontally.

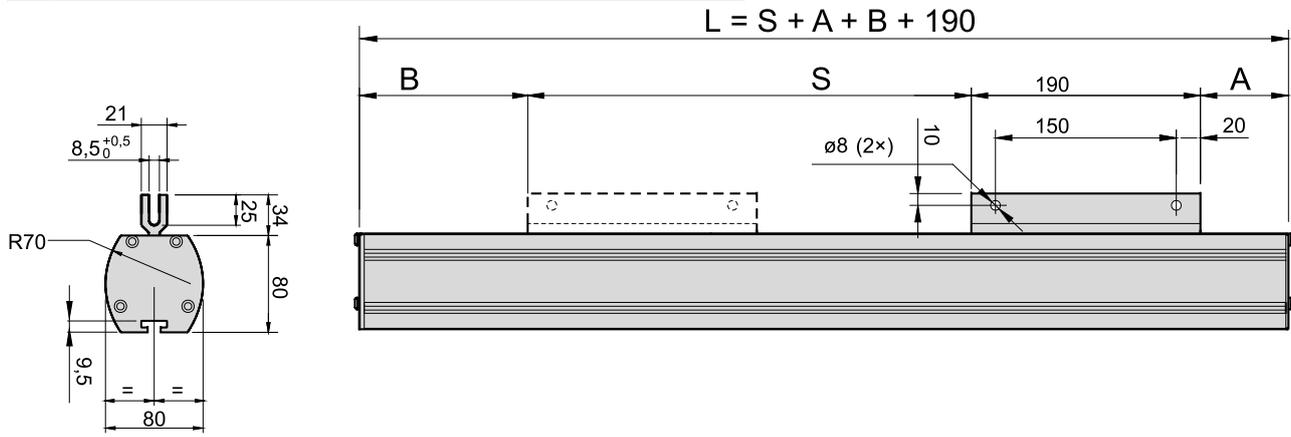

S: stroke  
L: length of profile  
A: non motor side  
B: motor side

Stroke.(S).	[mm]	500	600	700	800	900	1000	1100	1200	1300	1400	1500
<b>Dimensions.(A)./(B)</b>	[mm]											
..DT24-T68M ••• GCV		50,0 / 238,0										
DT24-B61M ••• GCV		53,0 / 287,0										
DT24-B62M ••• GCV		53,0 / 287,0										
DT24-B65M ••• GCV...		53,0 / 264,0										
<b>Weight</b>	[kg]											
..DT24-T68M ••• GCV		11,1	12,9	14,7	16,5	18,2	20,0	21,8	23,6	25,4	27,2	28,9
DT24-B61M ••• GCV		11,6	13,4	15,2	17,0	18,7	20,5	22,3	24,1	25,9	27,7	29,5
DT24-B62M ••• GCV		11,6	13,4	15,2	17,0	18,7	20,5	22,3	24,1	25,9	27,7	29,5
DT24-B65M ••• GCV..		12,0	13,8	15,6	17,6	19,3	21,1	22,9	24,7	26,5	28,2	30,1

## Performance Diagrams

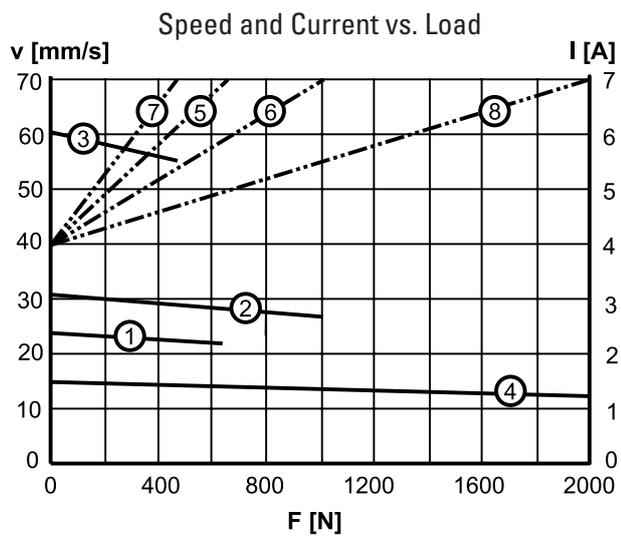


V: speed I: current F: load

1: speed DT24-T68M ••• GCV  
2: speed DT24-B61M ••• GCV  
3: speed DT24-B62M ••• GCV  
4: speed DT24-B65M ••• GCV

5: current DT24-T68M ••• GCV  
6: current DT24-B61M ••• GCV  
7: current DT24-B62M ••• GCV  
8: current DT24-B65M ••• GCV

## Definition of Forces



# Electrak.Non-driven.Actuator.PPA-M

» Ordering Key - see page 78  
» Glossary - see page 80

Load up to 6670 N



## Standard Features and Benefits

- Actuator with double input shafts to which a customer supplied motor or/and an intermediate shaft can be mounted
- Can be operated manually
- Robust and versatile
- Withstands very harsh environments
- Highly efficient ball screw drive system
- Holding brake prevents back driving
- Trunnion to clevis mounting
- Maintenance free

## Performance Specifications

Parameter		PPA-M
Maximum load, dynamic / static	[N]	6670 / 13350
Maximum speed at max. load	[mm/s]	8
Maximum input torque	[Nm]	9
Maximum input speed	[rpm]	100
Standard stroke lengths	[in]	4, 8, 12, 18, 24, 36
Operating temperature limits	[°C]	-25 – +65
End play, maximum	[mm]	1,0
Restraining torque	[Nm]	23


## General Specifications

Parameter	Electrak.PPA-M
Screw type	ball
Internally restrained	no
Manual override	no*
Holding brake	yes
End of stroke protection	no
Mid stroke protection	no
Certificates	–
Options	protective bellows

\* Either of the two input shafts can be used for manual operation if both shafts are not connected to a motor or an intermediate shaft.

# Electrak.Non-driven.Actuator.PPA-M

Load up to 6670 N

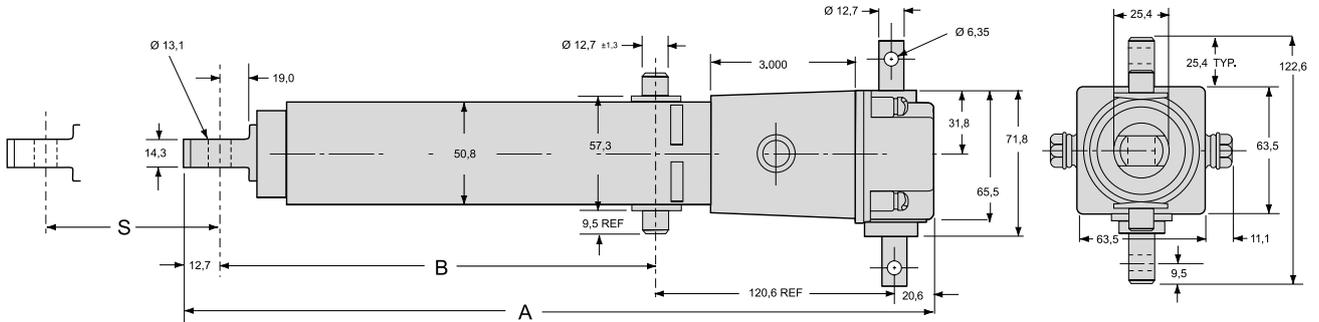


S: stroke  
 A: retracted length  
 B: retracted length to trunnions

Stroke.(S).	[inch.(mm)]	4 (101,6)	8 (203,2)	12 (304,8)	18 (457,2)	24 (609,6)	36 (914,4)
Retracted.length.(A)	[mm]	375,9	477,5	579,1	782,3	934,7	1239,5
Retracted.length.to.trunnions.(B)	[mm]	223,5	325,1	426,7	629,9	782,3	1087,1
Weight	[kg]	3,4	4,2	4,8	6,1	7,3	9,7

## Synchronous Operation

Two or more PPA-M actuators can easily be mechanically linked for synchronous operation by using intermediate shafts. The intermediate shafts and necessary couplings are provided by the customer.

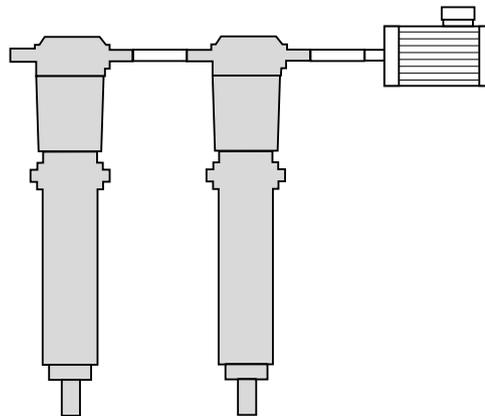

# Electrak.Non-driven.Actuator.FA14

» Ordering Key - see page 78  
» Glossary - see page 80

Load up to 6800 N



## Standard Features and Benefits

- Actuator with a flange where a customer supplied motor can be mounted
- Rugged and robust
- Withstands very harsh environments
- Stainless steel extension tube
- Corrosion free aluminium cover tube
- Acme or ball screw drive
- Trunnion mounting possible
- Overload clutch for mid and end of stroke protection
- T-slot grooves in the cover tube for magnetic sensors
- Maintenance free

## General Specifications

Parameter	FA14
Screw type	acme or ball
Internally restrained	yes
Manual override	no, optional
Holding brake acme screw versions ball screw versions	no, self-locking yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Certificates	CE
Options	<ul style="list-style-type: none"> <li>• manual override</li> <li>• alternative adaptor positions</li> <li>• custom color*</li> </ul>

\* Contact customer support


## Performance Specifications

Parameter		FA14
Maximum load, dynamic / static [N]	FA14-05A65 (acme screw)	1100 / 11350
	FA14-10A65 (acme screw)	2250 / 11350
	FA14-20A65 (acme screw)	2250 / 11350
	FA14-05B65 (ball screw)	2250 / 18000
	FA14-10B65 (ball screw)	4500 / 18000
	FA14-20B65 (ball screw)	4500 / 18000
	FA14-21B65 (ball screw)	6800 / 18000
Maximum speed at max. load* [mm/s]	FA14-05A65 (acme screw)	32
	FA14-10A65 (acme screw)	18
	FA14-20A65 (acme screw)	12
	FA14-05B65 (ball screw)	37
	FA14-10B65 (ball screw)	19
	FA14-20B65 (ball screw)	12
	FA14-21B65 (ball screw)	11
Maximum input torque [Nm]		1,8
Maximum input speed [rpm]		3000
Standard stroke lengths [mm]		50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600
	Operating temperature limits [°C]	-25 – +65
	End play, maximum [mm]	1,0
	Restraining torque [Nm]	0

\* Recommended maximum speed

# Electrak.Non-driven.Actuator.FA14

Load up to 6800 N

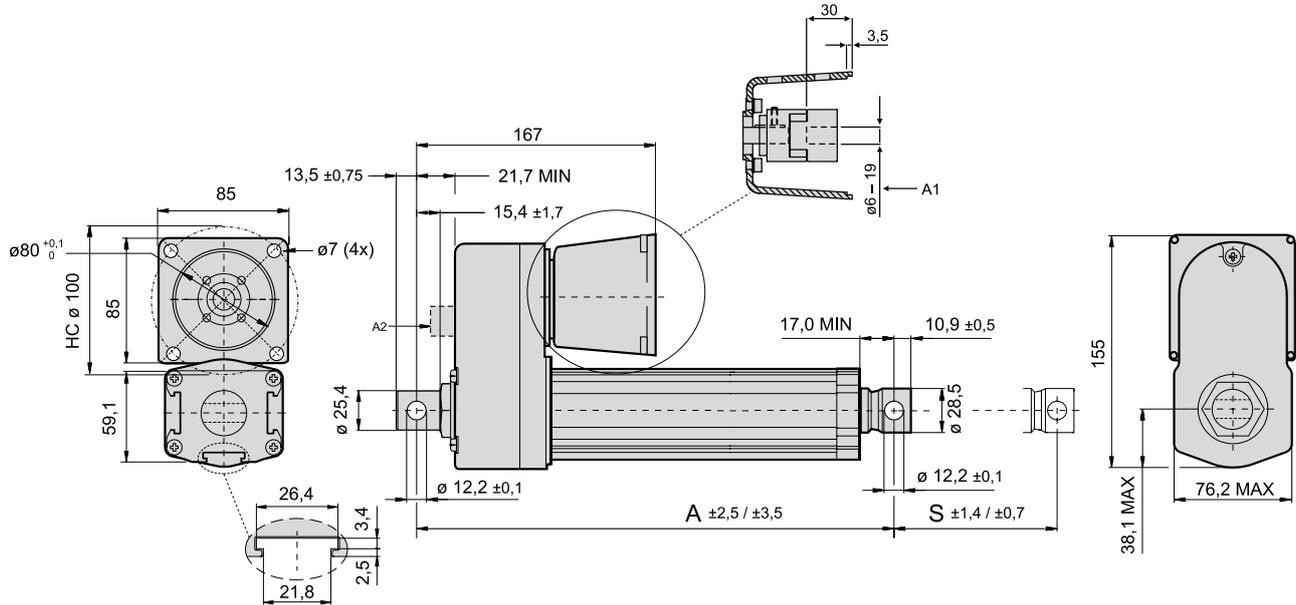

S: stroke, tolerance acme / ball screw

A2: manual override input (optional)

A: retracted length, tolerance acme / ball screw


A1: minimum/maximum input shaft bore in the coupling (supplied with a 6 mm hole)

Stroke.(S).	[mm]	50	100	150	200	250	300	350	400	450	500	550	600
Retracted.length.(A)..acme.screw.models	[mm]	216,7	266,7	316,7	366,7	416,7	466,7	566,7	616,7	666,7	716,7	766,7	816,7
Retracted.length.(A)..ball.screw.models	[mm]	269,6	319,6	369,6	419,6	469,6	519,6	619,6	669,6	719,6	769,6	819,6	869,6
Weight..acme.screw.models	[kg]	3,5	3,7	4,0	4,2	4,5	4,7	5,0	5,2	5,5	5,7	6,0	6,3
Weight..ball.screw.models	[kg]	4,2	4,5	4,7	5,0	5,2	5,5	5,7	6,0	6,2	6,5	6,7	7,0

# Electrical.Wiring.Diagrams


## DC-actuators

### Electrak 1 and 1SP

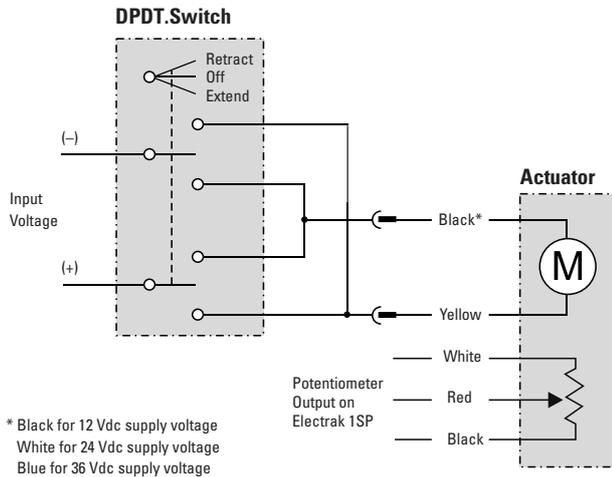


Connect the yellow lead to positive and black, white or blue\* to negative to extend the actuator. Change polarity to retract the actuator. The potentiometer output has 0 ohm between white and red when the actuator is fully retracted. The actuator should be protected from overload conditions by a customer provided fuse in the circuit (6 A for 12 Vdc, 3 A for 24 Vdc and 2 A for 36 Vdc).

### Electrak 10, LA14

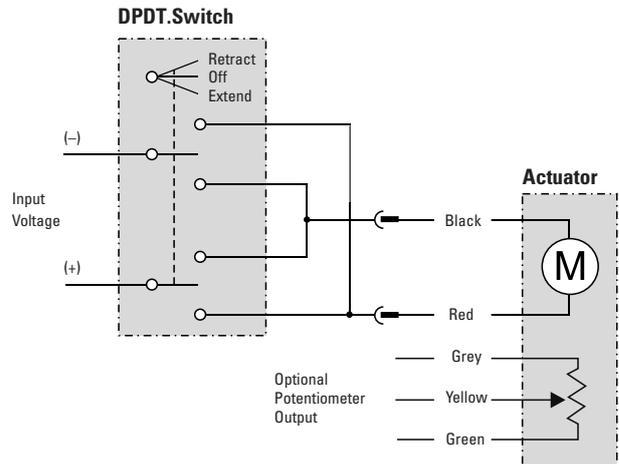


Connect the red lead to positive and black to negative to extend the actuator. Change polarity to retract the actuator. The potentiometer output has 0 ohm between grey and yellow when the actuator is fully extended.

### Electrak 050

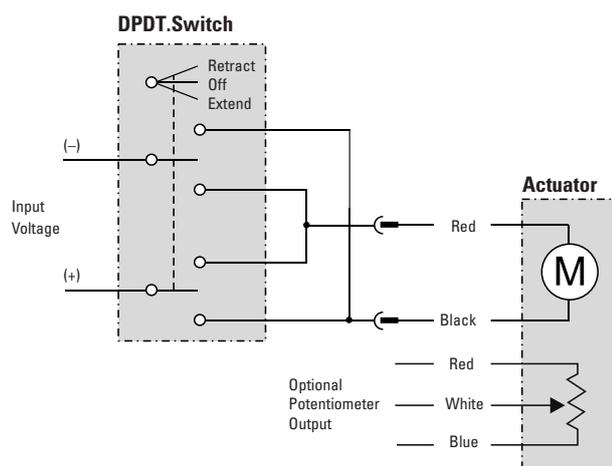

Connect the black lead to positive and red to negative to extend the actuator. Change polarity to retract the actuator. The potentiometer output has 0 ohm between white and red when the actuator is fully retracted.

### Electrak Pro

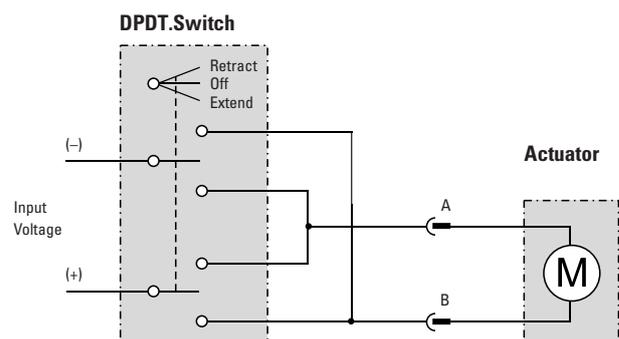


Connect pin B in the connector to positive and A to negative to extend the actuator. Change polarity to retract the actuator. Consult the actuator manual for information on the wiring of the control options.

# Electrical.Wiring.Diagrams


## DC-actuators

### Electrak PPA-DC

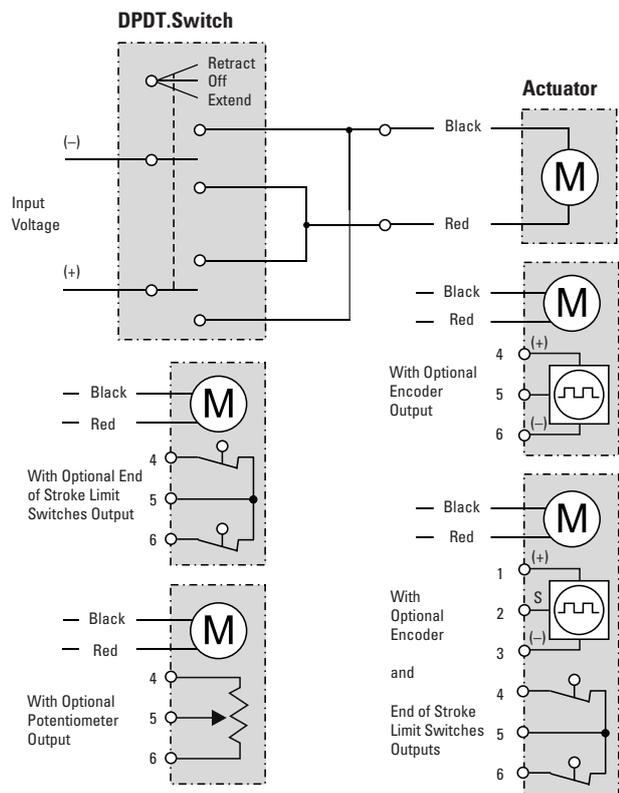


Connect the black lead to positive and red to negative to extend the actuator. Change polarity to retract the actuator. The encoder is supplied with 4,5 - 12 Vdc between terminals 4 or 1 and 6 or 3 and the pulse train signal is generated on terminal 5 or 2. The potentiometer output has 0 ohm between terminal 4 and 5 when the actuator is fully retracted.

### DMD

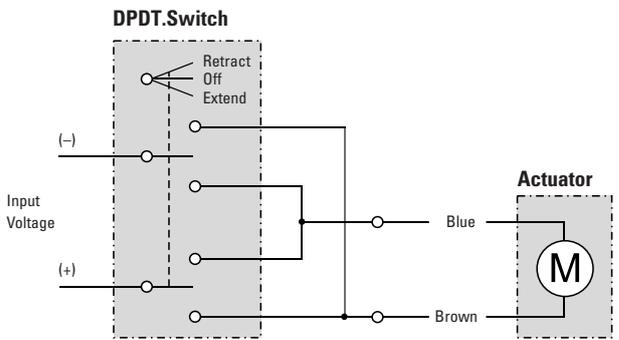

Connect the brown lead to positive and blue to negative to extend the actuator. Change polarity to retract the actuator.

### TC16, LM80-H, LM80-V and LM80-I

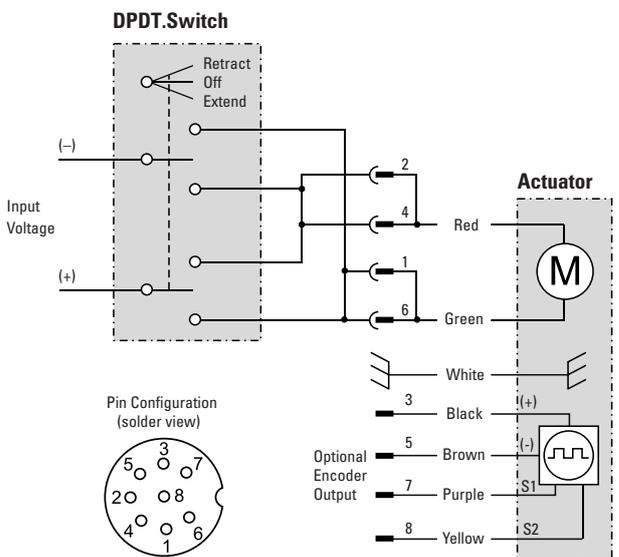


Connect the green lead to positive and red to negative to extend the actuator. Change polarity to retract the actuator. If using the connector supplied with the actuator, each motor lead must be connected to two pins in the connector. The encoder is supplied with 5 - 18 Vdc on pin 3 and 5 and the two pulse train signals are generated on pin 7 and 8.

# Electrical.Wiring.Diagrams


## AC-actuators

### Electrak 5, LA24 and DMA - 1 × 230 Vac

Without anti coast brake\*

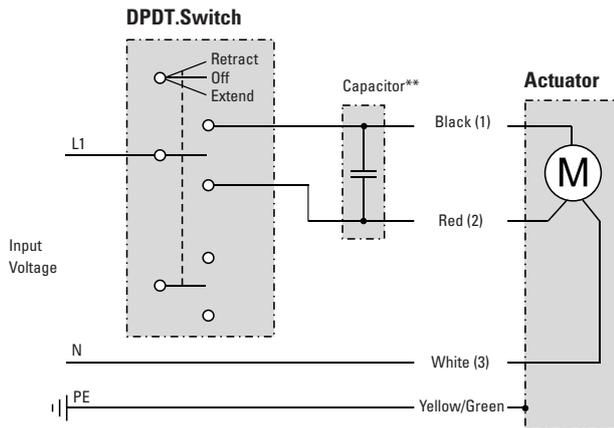

With anti coast brake\*

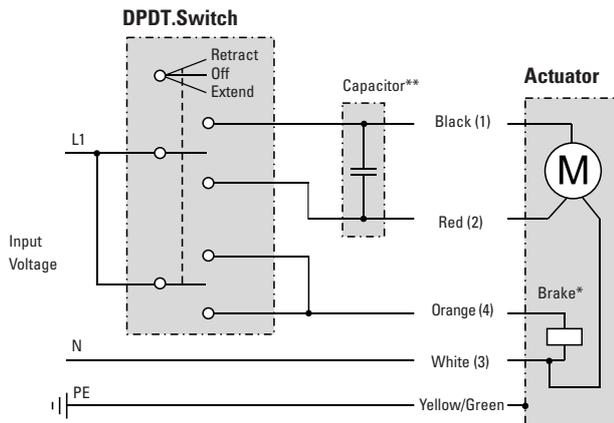


\* Anti coast brake is standard on Electrak 5 / LA24 for ball screw models and optional for acme screw models. On DMA there are no anti coast brake on acme models while ball screw models always are equipped with an anti coast brake.

\*\* 10 µF capacitor required to run the actuator, p/n 9200-448-003.


Leads can be either color or number marked. Connect black (1) lead to L1 and white (3) lead to N (neutral) to retract the actuator. Change L1 from lead black (1) to lead red (2) to extend the actuator. If the actuator is equipped with an anti coast brake, release the brake by connecting orange (4) lead lead to L1.

### Electrak 5, LA24 and DMA - 3 × 400 Vac

Without anti coast brake\*

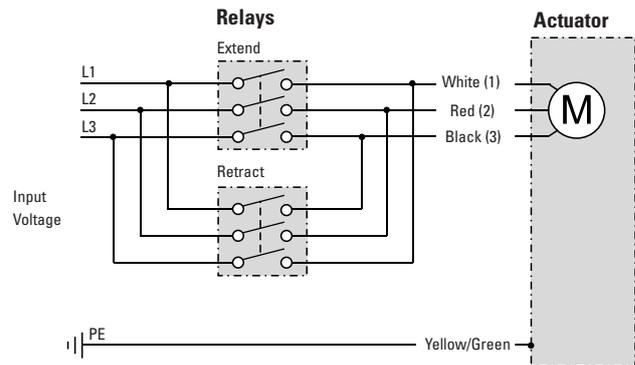

With anti coast brake\*

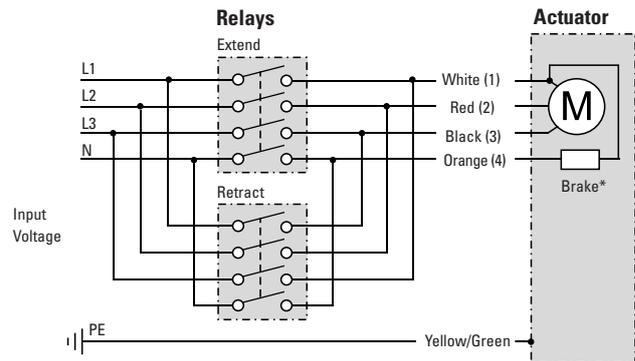

\* Anti coast brake is optional on Electrak 5 / LA24 on both acme and ball screw models. On DMA there are no anti coast brake on acme models while ball screw models always are equipped with an anti coast brake.

Leads can be either color or number marked. Connect white (1) lead to L1, red (2) lead to L2 and black (3) lead to L3 to extend the actuator. Change the places of white (2) lead and black (3) to retract the actuator. If the actuator is equipped with an anti coast brake, release the brake by connecting orange (4) lead lead to N (neutral).

- page intentionally left blank -

## Actuator.Controls

### General

Whether you plan to operate from a simple pushbutton or a programmable controller, Thomson controls can make your system easy to design, install and operate. Designed to drive actuators, the controls on the following pages are equipped either with easy to use terminal strips or plugs compatible with the actuators for ease of wiring. The controls can be operated manually via external push buttons/switches, hand held pendants or from electronic controls such as a PLC. We also have other actuator controls which may meet your particular needs. Contact customer service if you don't see the right control for your application.



# Actuator.Controls

## Switches

### DPDT Switch



- Robust switch
- Double pole, double throw (DPDT)
- 15 A rating at 270 Vac
- Center “off”
- Two momentary contacts
- Wiring diagram on label


### Specifications

Parameter		DPDT.Switch
Maximum voltage	[Vac]	270
Maximum current	[A]	15
Part number		830-8004-016


### Actuator Compatibility

Electrak 1, Electrak 1SP, Electrak 050, Electrak PPA-DC, Electrak 10, Electrak LA14, Electrak Pro, Electrak 5, Electrak LA24, TC16, DMD, DMA, LM80-H, LM80-V, LM80-I, DGB

### Wiring Diagram



### Dimensions

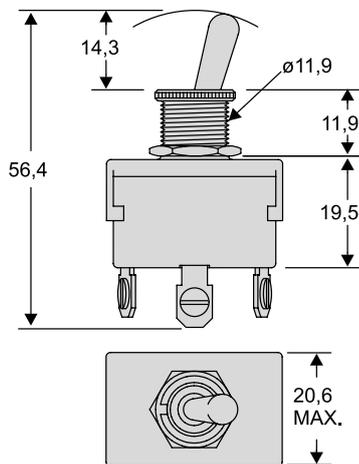

**!** Note: sometimes the switch can manage higher current than the actuator and sometimes it is the other way around. Always make sure that both the switch and the actuator can manage the current that the application require.

# Actuator.Controls

## Electronic Controls

### Control AC-063



- Rugged and robust control designed to operate under the hardest conditions
- Auto shut off function if the current or duty cycle limits of the control is exceeded.
- Robust plastic enclosure
- Versions for DC or AC supply voltage
- Versions with or without limit switch inputs
- Versions with or without control pendant

### Actuator Compatibility


AC-063B	Electrak PPA-DC, Electrak 10, Electrak LA14, Electrak Pro, DMD
AC-063BC	Electrak PPA-DC, Electrak 10, Electrak LA14, Electrak Pro, DMD
AC-063C	Electrak PPA-DC, Electrak 10, Electrak LA14, Electrak Pro, DMD




Note: sometimes the control can manage higher current and/or duty cycle than the actuator and sometimes it is the other way around. Always make sure that both the control and the actuator can manage the current and duty cycle that the application require.

### Dimensions


AC-063B

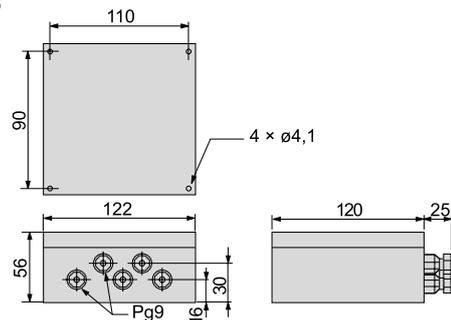

AC-063BC

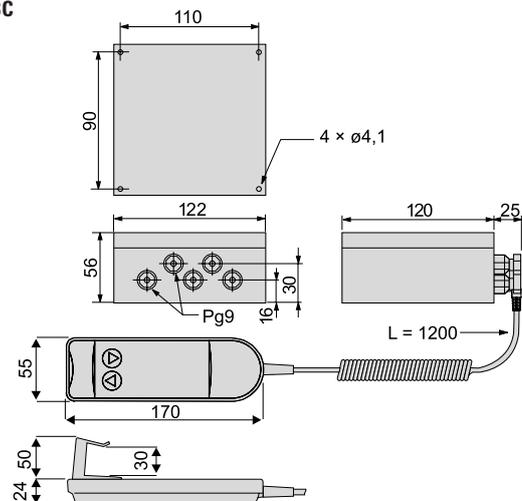

AC-063C

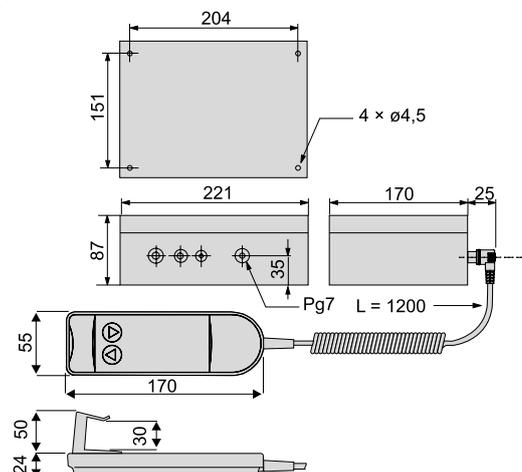

# Actuator.Controls



## Electronic Controls

### Control AC-063

### Specifications

Parameter	AC-063B		AC-063BC		AC-063C		
Input voltage [V]	Vdc	12 – 36	12 – 36	12 – 36	12 – 36	-	-
	Vac @ 50 Hz	-	-	-	-	230	230
Output voltage [Vdc]		12 – 36	12 – 36	12 – 36	12 – 36	24	24
Output current, max. [A]	@ 12 Vdc output	30	30	30	30	-	-
	@ 24 Vdc output	17	17	17	17	17	17
	@ 36 Vdc output	12	12	12	12	-	-
Max. duty cycle @ 25 °C [%]	10	10	10	10	10	10	
Weight of control [kg]	0,4	0,4	0,4	0,4	3	3	
Protection class	IP65	IP65	IP54	IP54	IP54	IP54	
Limit switch inputs	no	yes	no	yes	no	yes	
Control pendant included	no	no	yes	yes	yes	yes	
Certificates	CE	CE	CE	CE	CE	CE	
Part number	DC24-1B	DCA24-1B	DC24-1BC	DCA24-1BC	DC24-1C	DCA24-1C	

### Wiring Diagram

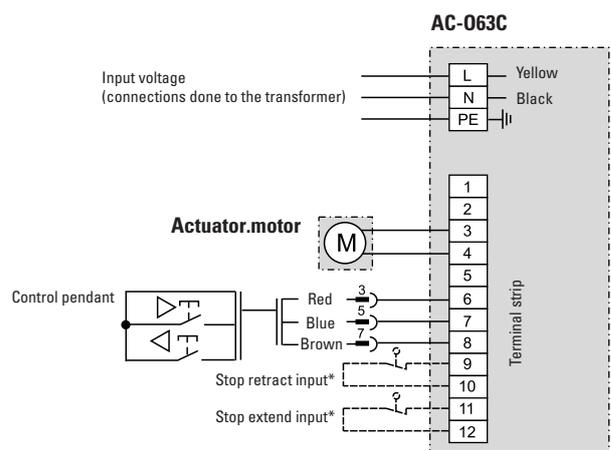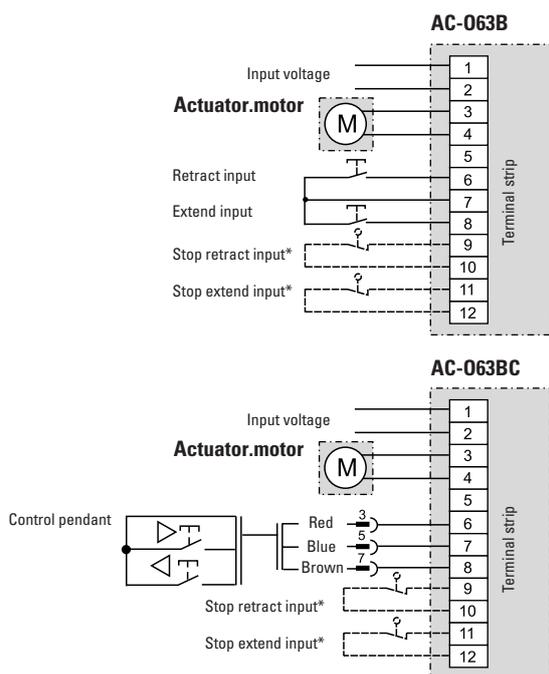

\* On models without stop retract and stop extend inputs these terminals are not available.

# Actuator.Controls

## Electronic Controls

### Control AC-247 ELS




- Compact, robust and light weight
- Electronic limit switches (ELS) stop the actuator at end of stroke if the actuator runs into an obstacle
- Connector input for DCG14-1H control pendant

### Actuator Compatibility


Electrak 1, Electrak 1SP, Electrak 050, LM80-H, LM80-V, LM80-I

### Wiring Diagram

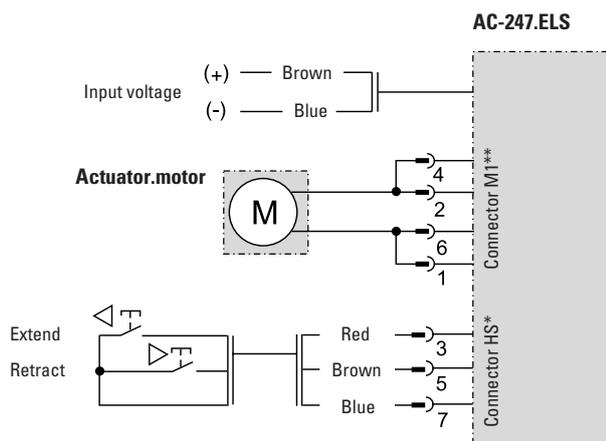

\* The diagram shows the control connected to control pendant DCG14-1H, but any type of normally open contacts can be used to control the direction of the actuator.  
 \*\* Each motor lead must be connected to two pins in the connector in order to not exceed the current limit of the connector.

### Dimensions

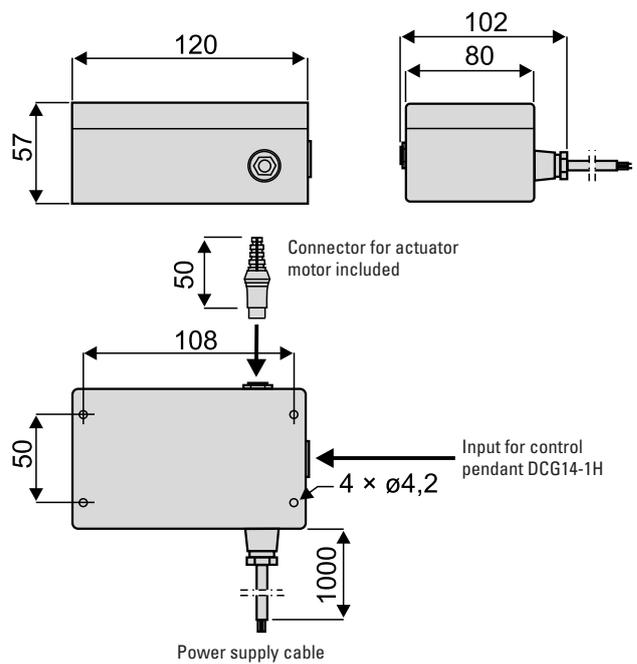

**!** Note: sometimes the control can manage higher current and/or duty cycle than the actuator and sometimes it is the other way around. Always make sure that both the control and the actuator can manage the current and duty cycle that the application require.

# Actuator.Controls

## Electronic Controls

### Control AC-247 ELS

#### Specifications

Parameter		AC-247.ELS	AC-247.ELS	AC-247.ELS
Input voltage	[Vdc]	12 or 24	12	24
Output voltage	[Vdc]	12 or 24	12	24
Output current, max. @ 12 Vdc output @ 24 Vdc output	[A]	10 5	12 -	- 8
Max. duty cycle @ 25 °C	[%]	10	10	10
Weight of control	[kg]	0,3	0,3	0,3
Protection class		IP54	IP54	IP54
Electronic limit switches		yes	yes	yes
Connector for control pendant		yes <sup>1</sup>	yes <sup>1</sup>	yes <sup>1</sup>
Control pendant included <sup>1</sup>		no	no	no
Certificates		CE	CE	CE
Part number		D604 110	D604 111	D604 112

<sup>1</sup>Control pendant type DCG14-1H is recommended, see page 56.

# Actuator.Controls

## Electronic Controls

### Control DCG



- Controls available for single actuator operation or synchronous operation of two actuators equipped with encoders.
- Small and light weight control operated via a control pendant which is ordered separately
- Built in Electronic Limit Switches (ELS) stop the actuator automatically at end of stroke or mid stroke stall
- The control pendant is ordered separately
- The “Control to Actuator” cable is ordered separately and comes in several version depending of the type of actuator being used

### Actuator Compatibility

DCG-150	Electrak 1, Electrak 1SP, Electrak 050 <sup>1</sup>
DCG-160	LM80-V
DCG-170	LM80-H
DCG-180	TC16, LM80-I
DCG-190	Electrak PPA-DC, Electrak 10, Electrak LA14, DMD <sup>2</sup>
DCG-260	Synchronous operation of two LM80-I <sup>3</sup>
DCG-280	Synchronous operation of two TC16 <sup>3</sup>

<sup>1</sup> This control do not work with Electrak 050 that has the limit switch option (“FS” or “PF” option).


<sup>2</sup> Note that the maximum current output of the control is 13 A while some of these actuators can, depending of the load and model being used, draw more current.

<sup>3</sup> The units must be equipped with encoders.



Note: sometimes the control can manage higher current and/or duty cycle than the actuator and sometimes it is the other way around. Always make sure that both the control and the actuator can manage the current and duty cycle that the application require.

### Dimensions

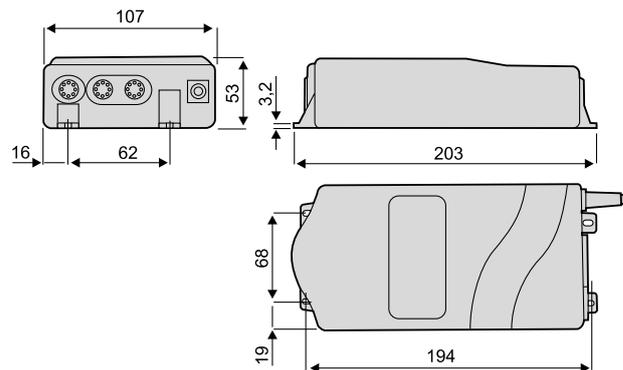

### Wiring Diagram

No wiring is necessary to the control. All connections are done through plugs.

# Actuator.Controls

## Electronic Controls

### Control DCG

#### Specifications

Parameter	DCG-150	DCG-160	DCG-170	DCG-180	DCG-190	DCG-260. <sup>5</sup>	DCG-280. <sup>7</sup>
Input voltage <sup>1</sup> [Vac]	1 × 230 ± 6%	1 × 230 ± 6%	1 × 230 ± 6%	1 × 230 ± 6%	1 × 230 ± 6%	1 × 230 ± 6%	1 × 230 ± 6%
Input frequency [Hz]	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Output voltage [Vdc]	24	24	24	24	24	24	24
Output current, max. <sup>2</sup> [A]	4	8	8	8	13	2 × 8	2 × 8
Operating temperature limits [°C]	+5 – +45	+5 – +45	+5 – +45	+5 – +45	+5 – +45	+5 – +45	+5 – +45
Max. duty cycle @ 25 °C <sup>3</sup> [%]	10	10	10	10	10	10	10
Maximum on time [s]	60	120	120	60	60	60	60
Weight of control [kg]	1,9	1,9	1,9	1,9	1,9	1,9	1,9
Protection class	double insulated	double insulated					
Electronic limit switches	yes	yes	yes	yes	yes	yes <sup>6</sup>	yes <sup>6</sup>
Included control pendant <sup>4</sup>	no	no	no	no	no	no	no
Certificates	CE	CE	CE	CE	CE	CE	CE
Part number	DCG24-1M-0150	DCG24-1M-0160	DCG24-1M-0170	DCG24-1M-0180	DCG24-1M-0190	DCG24-2M-0260	DCG24-2M-0280

<sup>1</sup> 115 Vac input voltage also available. Contact customer support.

<sup>2</sup> These controls are current limited. Review the current/load curves for the actuator you selected to make sure the control will provide enough current for the thrust you need. You may need to select one of the AC-063 or AC-247 ELS controls.

<sup>3</sup> Control will shut off if duty cycle is exceeded and automatically reset when cooled off.

<sup>4</sup> Control pendant type DCG14-1H is recommended, see page 56.

<sup>5</sup> Control for synchronous operation of two LM80-I rodless actuators. Contact customer support for information on synchronous operation of other actuator models.


<sup>6</sup> DCG-260 / DCG-280 uses a pulse counting function instead of current sensing to determine if the actuator is moving at the correct speed. If the pulses arrives too slowly or not at all the control will stop the motion of both actuators.

<sup>7</sup> Control for synchronous operation of two TC16 lifting columns. Contact customer support for information on synchronous operation of other actuator models.

# Actuator.Controls

## Control Accessories

### DCG Control Pendant

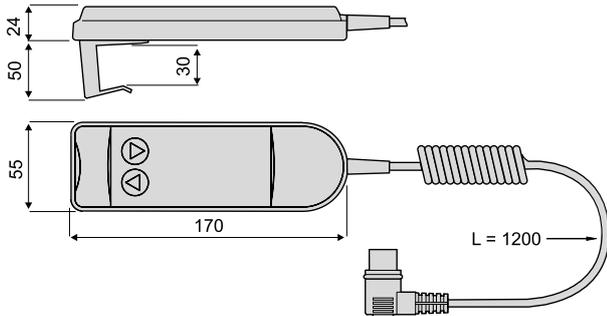

### Specifications

Parameter		DCG14-1H
Weight	[kg]	0,4
Cable length	[mm]	1200
Certificates		CE
Part number		DCG14-1H

- Handy and light weight control pendant with spiral cord cable which connects to the DCG, AC-063 (possible on BC and C versions only) and AC-247 ELS control pendant input with a plug

### Control to Control Cable for DCG, AC-063 and AC-247 ELS Controls



### Specifications

Parameter		
Lead cross section	[mm <sup>2</sup> ]	7 × 0,14
Cable length	[mm]	2450
Part number		D620 095


- This cable connects with its plug to the control pendant input on DCG, AC-063 (possible on BC and C versions only) and AC-247 ELS in order to connect the control to another device than the DCG control pendant

# Actuator.Controls


## Control Accessories

### Control to Actuator Cables with Double Connectors for DCG Controls

Electrak.1,Electrak.1SP,Electrak.050

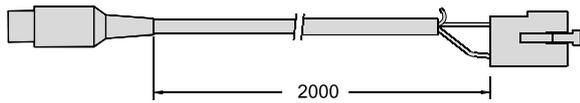

Electrak.10

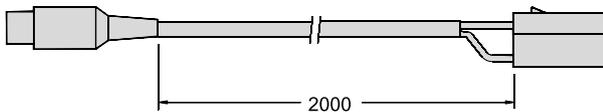

- Connects the DCG control to actuators with connector


### Specifications

Parameter		
Lead cross section	[mm <sup>2</sup> ]	1,5
Cable length	[mm]	2000
Part number		
Electrak 1, Electrak 1SP, Electrak 050		D620 155
Electrak 10, Electrak LA14		D620 156
DMD*		-
TC16**		-
LM80-V, LM80-H, LM80-I**		-

\* Use the "Single Connector" cable below as DMD has no connector.

\*\* These units do not require a control to actuator cable as the connector on the actuator cable can be directly plugged in to the control.

### Control to Actuator Cables with Single Connector for DCG Controls

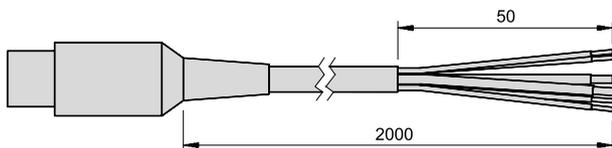

- Connects the DCG control to actuators without connector

### Specifications

Parameter		
Lead cross section	[mm <sup>2</sup> ]	4 × 0,25 + 2 × 1,5
Cable length	[mm]	2000
Part number		D620 143


# Accessories and Spare Parts

## Mounting Components

### Mounting Pin Kits

Designation	Compatible Actuators	A.[mm]	Part.Number
Mounting pins (pair)	Electrak 10, Electrak 5	12,7	D603 028
Mounting pins (pair)	Electrak LA14, LA24, FA14	12	D603 023


The mounting pins are used in the rear and front adapter holes of the actuator. The pins have a groove in each end so that it can be secured with snap rings.

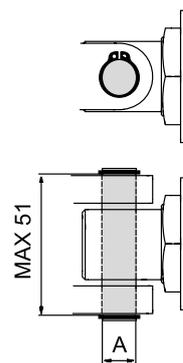

### Mounting Pin Bracket Kits

Designation	Compatible Actuators	Part.Number
Mounting pin brackets (pair)	Electrak LA14, LA24, FA14	D603 029


The mounting pin brackets are used to attach the front and rear adapter via a pair of mounting pins to the objects to which it is mounted. Note! one pair of brackets is needed per adapter as there must be a bracket on each side of the adapter.

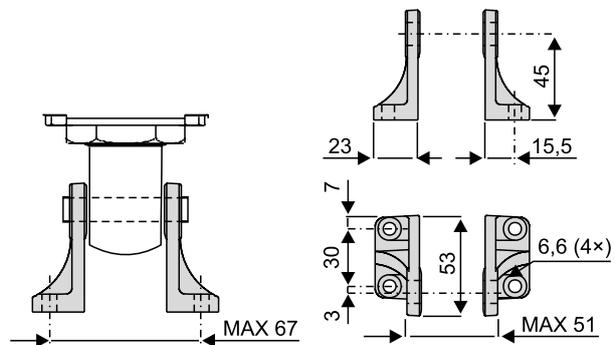

### T-slot Bolt

Designation	Compatible Actuators	Part.Number
M10 T-slot bolt	DMD, DMA	D800041

The T-slot bolt fits in to the T-slot running along the outer profile of DMD and DMA lifting columns. The T-slot bolts can be used to mount the unit instead of using the upper mounting plate, or/and for attaching other components to the profile.




# Accessories and Spare Parts

## Mounting Components

### T-slot Mounting Kit

Designation	Compatible Actuators	Part Number
M8 T-slot mounting kit	LM80-H, LM80-V, LM80-I	D680507

The T-slot mounting kit consists of four T-slot bolts, washers and nuts that fit in to the T-slot running along the profile of LM80 rodless actuators. The T-slot mounting kit can be used to mount the unit or/and for attaching other components to the profile.

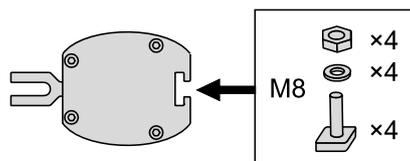


### Trunnion Mounting Kits


Designation	Compatible Actuators	Part Number
Trunnions (pair)	Electrak LA14, LA24, FA14	D603 022
Trunnion brackets (pair)	Electrak LA14, LA24, FA14	D603 030

The trunnions can be mounted to the T-slot running along the right and left side of the cover tube on an Electrak LA14, LA24 or FA14.

#### Trunnions

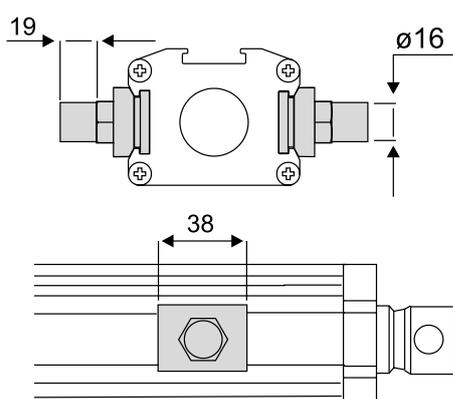

#### Trunnion Brackets

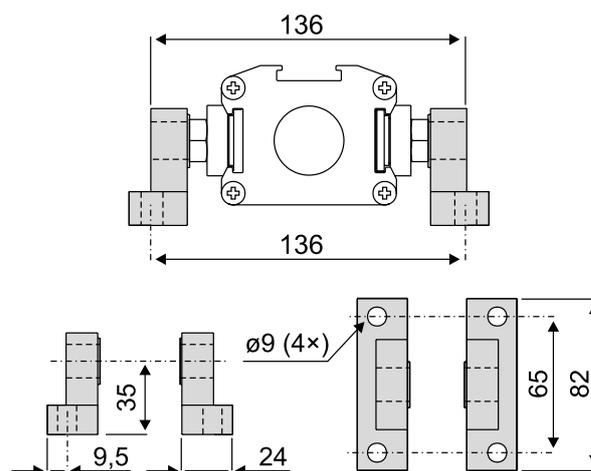

# Accessories and Spare Parts


## Mounting Components

### PPA Rear Clevis Mounting Kits


Designation	Compatible Actuators	Part Number
PPA rear clevis mounting kit for DC actuators	Electrak PPA-DC	7827320
PPA rear clevis mounting kit	Electrak PPA-DC	7824295

The rear clevis mounting kits are attached to the tube of an Electrak PPA actuator allowing the actuator to be mounted clevis to clevis style. Note that one of the kits fits both PPA-DC and PPA-AC actuators while the other only fits PPA-DC actuators.

#### PPA Rear Clevis Mounting Kit

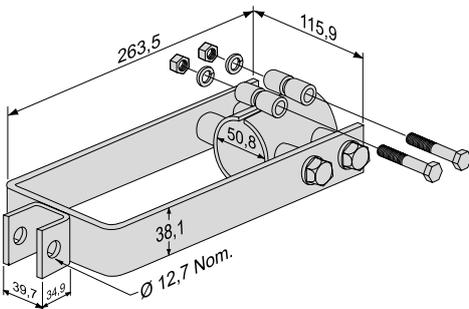

#### PPA Rear Clevis Mounting Kit for DC Actuators

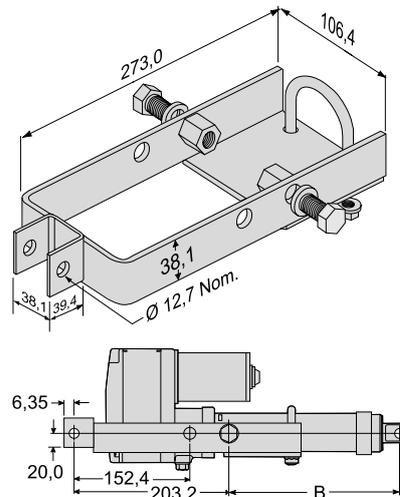


B: retracted length to trunnion, also see product pages.

### PPA Tube Mounting Kits

Designation	Compatible Actuators	Part Number
Electrak PPA tube mount - light duty 3330 N	Electrak PPA-DC	7822520
Electrak PPA tube mount - heavy duty 6670 N	Electrak PPA-DC	7821783


The tube mounting kits work as a clamp that is mounted at any desired position along the actuator tube. Trunnion pins for the tube mount clamp are supplied and mounted by the customer.

#### Electrak PPA Tube Mount - Light Duty 3330 N

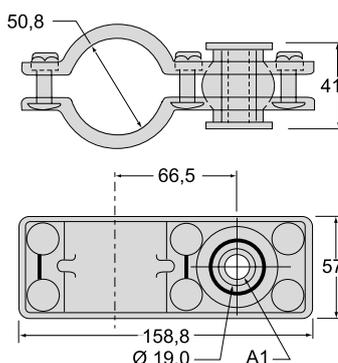

A1: hole diameter 12,7 with bushing.

#### Electrak PPA Tube Mount - Heavy Duty 6670 N

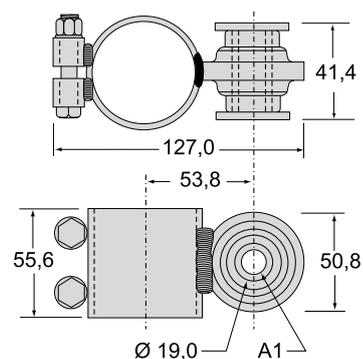


A1: hole diameter 12,7 with bushing.

# Accessories and Spare Parts

## Electrical Components

Capacitor Kits			
Designation	Compatible Actuators	Actuator Supply Voltage	Part Number
Capacitor kit	Electrak 5, LA24, DMA	115 Vac	9200-448-002
Capacitor kit	Electrak 5, LA24, DMA	230 Vac	9200-448-003

All 230 and 115 Vac actuators require a capacitor to be wired between the windings to run. The capacitor needs to be mounted externally by the customer. Also see the Electrical Wiring Diagrams section.

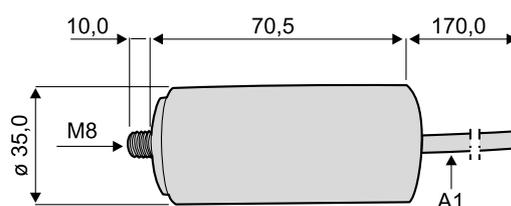


A1: cable 2 × 0,75 mm<sup>2</sup>

Magnetic Sensor			
Designation	Compatible Actuators	Contact Type	Part Number
Magnetic sensor	Electrak LA14, LA24, FA14	normally open	D535 070
Magnetic sensor	Electrak LA14, LA24, FA14	normally closed	D535 071

Specifications		
Parameter		
Maximum power	[W]	10
Maximum voltage	[Vdc]	43
Maximum current	[A]	0,5
Maximum contact resistance	[ohm]	0,2
Lead cross section	[mm <sup>2</sup> ]	2 × 0,12
Cable length	[mm]	3000
Protection class		IP67

The magnetic sensor fits in to the T-slot running along three sides of the cover tube on an Electrak LA14, LA24 or FA14. The normally closed sensors can be used with AC-063 controls that have limit switch inputs. The cable is molded into the switch.

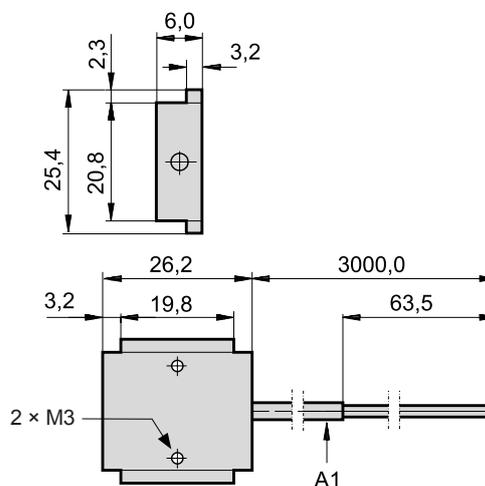

A1: cable 2 × 0,12 mm<sup>2</sup>

# Accessories and Spare Parts

## Electrical Components


### Limit Switches

Designation	Cable Length	Part Number
Limit switch	1 m	671 545 0281
Limit switch	5 m	671 545 0290
Limit switch	10 m	671 545 0299

### Specifications

Parameter		
Maximum voltage	[V]	240
Maximum current	[A]	1,5
Lead cross section	[mm <sup>2</sup> ]	5 × 0,75
Contact type		1 NO + 1 NC
Protection class		IP67

The limit switches can be used with AC-063 controls that have limit switch inputs. The cable is molded into the switch.

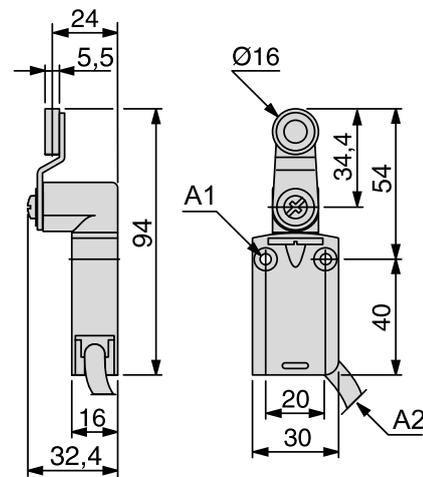


A1: 2 × mounting holes  $\varnothing 4,2$ , counterbored  $\varnothing 8$  mm by 4 mm deep  
A2: cable  $\varnothing 7,5$  mm

### Electrak Pro Programming Unit

Designation	Part Number
Programming Unit	9200-101-051

If an Electrak Pro actuator is equipped with the programmable limit switch option the programming unit is necessary to be able to program the limit switch positions. The unit comes with a 4 meter long cable with connectors in both ends.

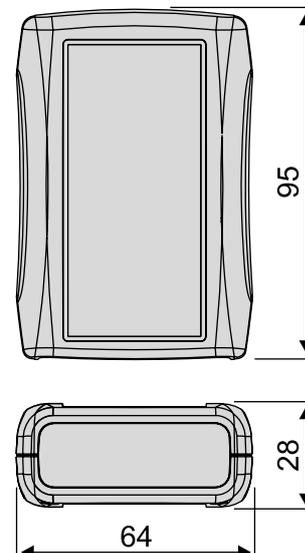

# Accessories.and.Spare.Parts

## Spare Parts

Electrak Pro Spare Parts	
Designation	Part Number
Electrak Pro mating connector, standard (grey seal)	9200-101-042
Electrak Pro mating connector with 1 m pigtail	9200-101-043
Electrak Pro mating connector, heavy gauge wire (blue seal)	9200-101-046
Electrak Pro manual override seal	9200-680-001

# Ordering.Keys

## Electrak DC-actuators

Electrak 1		
1	2	3
S24.-	09A04.-	06
<b>1..Model.and.input.voltage</b> S12 - = Electrak 1, 12 Vdc S24 - = Electrak 1, 24 Vdc S36 - = Electrak 1, 36 Vdc	<b>2..Dynamic.load.capacity.and.max..speed</b> 09A04 = 110 N, 75 mm/s 09A08 = 225 N, 45 mm/s 17A08 = 340 N, 26 mm/s 17A16 = 340 N, 14 mm/s	<b>3..Electrical.stroke.(actual.stroke.in.mm)</b> 01 = 1 inch (20,8 mm) 02 = 2 inch (46,2 mm) 03 = 3 inch (71,6 mm) 04 = 4 inch (97,0 mm) 05 = 5 inch (122,4 mm) 06 = 6 inch (147,8 mm)

Electrak 1SP		
1	2	3
SP24.-	09A04.-	06
<b>1..Model.and.input.voltage</b> SP12 - = Electrak 1SP, 12 Vdc SP24 - = Electrak 1SP, 24 Vdc SP36 - = Electrak 1SP, 36 Vdc	<b>2..Dynamic.load.capacity.and.max..speed</b> 09A04 = 110 N, 75 mm/s 09A08 = 225 N, 45 mm/s 17A08 = 340 N, 26 mm/s 17A16 = 340 N, 16 mm/s <sup>1</sup>	<b>3..Ordering.stroke.(actual.stroke.in.mm)</b> 02 = 2 inch (58,7 mm) 04 = 4 inch (115,1 mm) 06 = 6 inch (171,5 mm)  <sup>1</sup> Not possible in combination with 6 inch stroke.

# Ordering.Keys



## Electrak DC-actuators

Electrak 050			
1	2	3	4
DE24.-	17W44M	15	FS
<b>1..Model.and.input.voltage</b> DE12 - = Electrak 050, 12 Vdc DE24 - = Electrak 050, 24 Vdc DE36 - = Electrak 050, 36 Vdc DE24Q = Electrak 050, 24 Vdc, Q-version <sup>1</sup>		<b>3..Stroke</b> 02 = 25 mm 05 = 50 mm 07 = 75 mm 10 = 100 mm 12 = 125 mm 15 = 150 mm 17 = 175 mm 20 = 200 mm	
<b>2..Dynamic.load.capacity.and.color</b> 17W41M = 510 N, black housing 17W42M = 275 N, black housing 17W44M = 140 N, black housing 17W41W = 510 N, white housing <sup>1</sup> 17W42W = 275 N, white housing <sup>1</sup> 17W44W = 140 N, white housing <sup>1</sup>		<b>4..End.of.stroke.limit.switches.and.potentiometer</b> FS = limit switches and no potentiometer PO = potentiometer <sup>2</sup> PF = limit switches and potentiometer <sup>2</sup> MF = crossholes rotated 90° and limit switches MP = crossholes rotated 90° and potentiometer <sup>2</sup>	
		<sup>1</sup> White housing is standard for the Q-version. <sup>2</sup> Not possible in combination with 200 mm stroke.	

Electrak PPA-DC					
1	2	3	4	5	6
PPA24.-	58B65.-	18	N.-	LS	X
<b>1..Model.and.input.voltage</b> PPA12 - = Electrak PPA-DC, 12 Vdc PPA24 - = Electrak PPA-DC, 24 Vdc PPA36 - = Electrak PPA-DC, 36 Vdc		<b>3..Stroke.</b> 04 = 4 inch (101,6 mm) 08 = 8 inch (203,2 mm) 12 = 12 inch (304,8 mm) 18 = 18 inch (457,2 mm) 24 = 24 inch (609,6 mm) 36 = 36 inch (914,4 mm)		<b>5..Feedback.option</b> XX = no feedback option LS = end of stroke limit switches PO = potentiometer <sup>1</sup> HS = encoder HL = encoder + end of stroke limit switches	
<b>2..Dynamic.load.capacity.</b> 18B65 - = 3330 N 58B65 - = 6670 N		<b>4..Brake.option</b> N - = no brake option		<b>6..Bellows.option</b> X = no bellows C = bellows	
				<sup>1</sup> Not available with limit switches.	



# Ordering.Keys

## Electrak DC-actuators

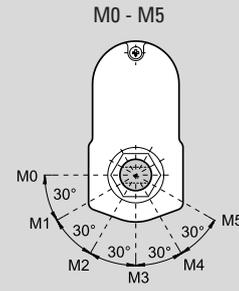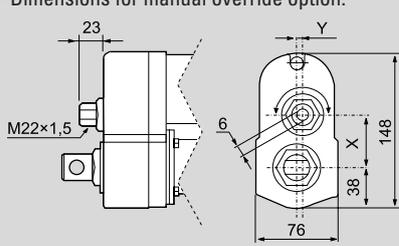Electrak 10														
1	2	3	4	5										
D12.-	20B5.-	04	M0	N										
<p><b>1..Input.voltage</b> D12 - = 12 Vdc D24 - = 24 Vdc D36 - = 36 Vdc</p> <p><b>2..Dynamic.load.capacity,.screw.type.and.maximum.speed</b> 05A5 - = 1100 N, acme, 54 mm/s 10A5 - = 2250 N, acme, 30 mm/s 20A5 - = 2250 N, acme, 15 mm/s 05B5 - = 2250 N, ball, 61 mm/s 10B5 - = 4500 N, ball, 30 mm/s 20B5 - = 4500 N, ball, 15 mm/s 21B5 - = 6800 N, ball, 15 mm/s</p>	<p><b>3..Stroke</b> 04 = 4 inch (101,6 mm) 06 = 6 inch (152,4 mm) 08 = 8 inch (203,2 mm) 10 = 10 inch (254,0 mm) 12 = 12 inch (304,8 mm) 14 = 14 inch (355,6 mm) 16 = 16 inch (406,4 mm) 18 = 18 inch (457,2 mm) 20 = 20 inch (508,0 mm) 24 = 24 inch (609,6 mm)</p> <p><b>4..Rear.adapter.hole.position<sup>1</sup></b> M0 = adaptor at 0° (standard position) M1 = adaptor at 30° M2 = adaptor at 60° M3 = adaptor at 90° M4 = adaptor at 120° M5 = adaptor at 150°</p> <p><b>5..Options</b> N = no option NPO = potentiometer NHW = manual override<sup>2</sup></p>	<p><sup>1</sup> Definition of rear adapter hole positions.</p>  <p><sup>2</sup> Dimensions for manual override option.</p>  <table border="1"> <thead> <tr> <th>Model</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>05A(B)5 -</td> <td>49,6</td> <td>0,0</td> </tr> <tr> <td>10A(B)5 -</td> <td>43,3</td> <td>5,2</td> </tr> <tr> <td>20(21)A(B)5 -</td> <td>38,9</td> <td>0,0</td> </tr> </tbody> </table>	Model	X	Y	05A(B)5 -	49,6	0,0	10A(B)5 -	43,3	5,2	20(21)A(B)5 -	38,9	0,0
Model	X	Y												
05A(B)5 -	49,6	0,0												
10A(B)5 -	43,3	5,2												
20(21)A(B)5 -	38,9	0,0												


# Ordering.Keys

## Electrak DC-actuators

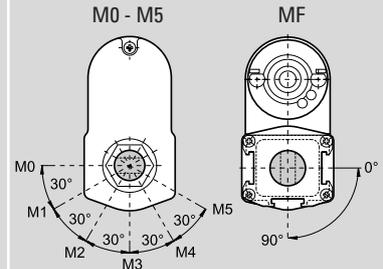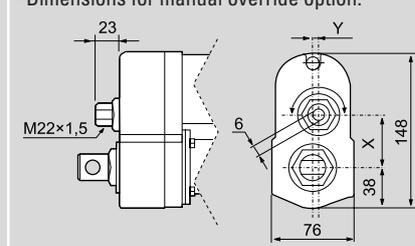Electrak LA14																
1	2	3	4	5												
DA12.-	10A65M	15	M0	N												
<p><b>1..Input.voltage</b>                      DA12 - = 12 Vdc                      DA24 - = 24 Vdc                      DA36 - = 36 Vdc</p> <p><b>2..Dynamic.load.capacity,.screw.type.and.maximum.speed</b>                      05A65M = 1100 N, acme, 54 mm/s                      10A65M = 2250 N, acme, 30 mm/s                      20A65M = 2250 N, acme, 15 mm/s                      05B65M = 2250 N, ball, 61 mm/s                      10B65M = 4500 N, ball, 30 mm/s                      20B65M = 4500 N, ball, 15 mm/s                      21B65M = 6800 N, ball, 15 mm/s</p>		<p><b>3..Stroke</b>                      05 = 50 mm                      10 = 100 mm                      15 = 150 mm                      20 = 200 mm                      25 = 250 mm                      30 = 300 mm                      35 = 350 mm                      40 = 400 mm                      45 = 450 mm                      50 = 500 mm                      55 = 550 mm                      60 = 600 mm</p> <p><b>4..Rear./front.adapter.hole.position<sup>1</sup></b>                      M0 = both adaptors at 0° (standard position)                      M1 = rear adaptor at 30°, front at 0°                      M2 = rear adaptor at 60°, front at 0°                      M3 = rear adaptor at 90°, front at 0°                      M4 = rear adaptor at 120°, front at 0°                      M5 = rear adaptor at 150°, front at 0°                      MF = rear and front adaptor at 90°</p> <p><b>5..Options</b>                      N = no option                      NPO = potentiometer                      NHW = manual override<sup>2</sup></p>		<p><sup>1</sup> Definition of adapter hole positions.</p>  <p><sup>2</sup> Dimensions for manual override option.</p>  <table border="1"> <thead> <tr> <th>Model</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>05A(B)65M</td> <td>49,6</td> <td>0,0</td> </tr> <tr> <td>10A(B)65M</td> <td>43,3</td> <td>5,2</td> </tr> <tr> <td>20(21)A(B)65M</td> <td>38,9</td> <td>0,0</td> </tr> </tbody> </table>	Model	X	Y	05A(B)65M	49,6	0,0	10A(B)65M	43,3	5,2	20(21)A(B)65M	38,9	0,0
Model	X	Y														
05A(B)65M	49,6	0,0														
10A(B)65M	43,3	5,2														
20(21)A(B)65M	38,9	0,0														



# Ordering.Keys

## Electrak DC-actuators

Electrak Pro						
1	2	3	4	5	6	7
PR24	10-4B65	D	10	R	C	S
<p><b>1..Model.and.input.voltage</b> PR12 = Electrak Pro, 12 Vdc PR24 = Electrak Pro, 24 Vdc</p> <p><b>2..Dynamic.load.capacity.and.screw.type</b> 02-2A65 = 1100 N, acme 05-4A65 = 2250 N, acme 07-8A65 = 3375 N, acme 05-2B65 = 2250 N, ball 10-4B65 = 4500 N, ball</p> <p><b>3..Protection.class</b> D = IP66 (standard) G = IP67</p>		<p><b>4..Stroke</b> 05 = 50 mm 10 = 100 mm 15 = 150 mm 20 = 200 mm 30 = 300 mm</p> <p><b>5..Control.PCB.options</b> S = electronic load monitoring, ELM (standard) D = ELM + encoder L = ELM + linear potentiometer<sup>1</sup> P = ELM + programmable limit switches<sup>1</sup> T = ELM + low level power switching R = ELM + end of stroke indication outputs<sup>1</sup> U = ELM + ELM trip indication output K = ELM + signal follower input<sup>1</sup></p> <p><b>6..Front.adapter.hole.and.anti-rotation.options<sup>2</sup></b> C = freely rotatable cross hole, no anti-rotation S = adapter hole in standard position, anti-rotation<sup>3</sup> M = adapter hole rotated 90°, anti-rotation<sup>3</sup> R = rod end, anti-rotation<sup>3</sup></p>		<p><b>7..Finish</b> S = no paint (standard) B = actuator painted black</p> <p><sup>1</sup> Ball screw units require anti-rotation, optional for acme screw units (specify option S, M, C or R in position 6). <sup>2</sup> Other front adapters possible on request, contact customer support. <sup>3</sup> Definition of adapter hole positions.</p> 		

# Ordering.Keys

## Electrak AC-actuators

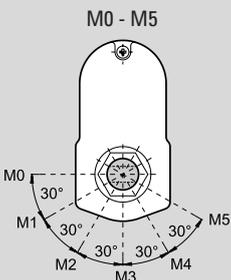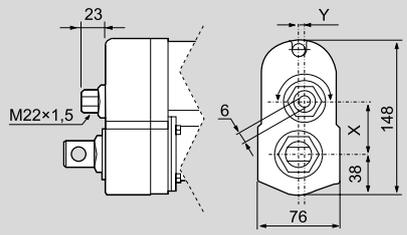Electrak 5														
1	2	3	4	5										
A22.-	20B5.-	04	M0	BPO										
<p><b>1..Input.voltage</b>                      A22 - = 1 × 230 Vac                      A42 - = 3 × 400 Vac</p> <p><b>2..Dynamic.load.capacity,.screw.type.and.maximum.speed</b>                      05A5 - = 1100 N, acme, 54 mm/s<sup>1</sup>                      10A5 - = 2250 N, acme, 30 mm/s                      20A5 - = 2250 N, acme, 15 mm/s                      05B5 - = 2250 N, ball, 61 mm/s                      10B5 - = 4500 N, ball, 30 mm/s                      20B5 - = 4500 N, ball, 15 mm/s                      21B5 - = 6800 N, ball, 15 mm/s</p> <p><b>3..Stroke</b>                      04 = 4 inch (101,6 mm)                      06 = 6 inch (152,4 mm)                      08 = 8 inch (203,2 mm)                      10 = 10 inch (254,0 mm)                      12 = 12 inch (304,8 mm)                      14 = 14 inch (355,6 mm)                      16 = 16 inch (406,4 mm)                      18 = 18 inch (457,2 mm)                      20 = 20 inch (508,0 mm)                      24 = 24 inch (609,6 mm)</p>	<p><b>4..Rear.adapter.hole.position<sup>2</sup></b>                      M0 = adaptor at 0° (standard position)                      M1 = adaptor at 30°                      M2 = adaptor at 60°                      M3 = adaptor at 90°                      M4 = adaptor at 120°                      M5 = adaptor at 150°</p> <p><b>5..Options<sup>3</sup></b>                      N = no option                      B = anti coast brake<sup>3</sup>                      NPO = potentiometer                      NHW = manual override<sup>4</sup>                      BPO = anti coast brake and potentiometer<sup>3</sup>                      BHW = anti coast brake and manual override<sup>3/4</sup></p> <p><sup>1</sup>05A5 - not possible with 400 Vac input voltage.  <sup>2</sup>Definition of rear adapter hole positions.</p> 	<p><sup>3</sup>Ball screw versions must always be ordered with an anti coast brake while acme versions can be ordered with or without an anti coast brake.</p> <p><sup>4</sup>Dimensions for manual override option.</p>  <table border="1"> <thead> <tr> <th>Model</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>05A(B)5 -</td> <td>49,6</td> <td>0,0</td> </tr> <tr> <td>10A(B)5 -</td> <td>43,3</td> <td>5,2</td> </tr> <tr> <td>20(21)A(B)5 -</td> <td>38,9</td> <td>0,0</td> </tr> </tbody> </table>	Model	X	Y	05A(B)5 -	49,6	0,0	10A(B)5 -	43,3	5,2	20(21)A(B)5 -	38,9	0,0
Model	X	Y												
05A(B)5 -	49,6	0,0												
10A(B)5 -	43,3	5,2												
20(21)A(B)5 -	38,9	0,0												

# Ordering.Keys

## Electrak AC-actuators

### Electrak LA24

1	2	3	4	5
AA22.-	20B65M	05	MF	BPO

#### 1..Input.voltage

AA22 - = 1 × 230 Vac

AA42 - = 3 × 400 Vac

#### 2..Dynamic.load.capacity,.screw.type.and.maximum.speed

05A65M = 1100 N, acme, 54 mm/s<sup>1</sup>

10A65M = 2250 N, acme, 30 mm/s

20A65M = 2250 N, acme, 15 mm/s

05B65M = 2250 N, ball, 61 mm/s

10B65M = 4500 N, ball, 30 mm/s

20B65M = 4500 N, ball, 15 mm/s

21B65M = 6800 N, ball, 15 mm/s

#### 3..Stroke

05 = 50 mm

10 = 100 mm

15 = 150 mm

20 = 200 mm

25 = 250 mm

30 = 300 mm

35 = 350 mm

40 = 400 mm

45 = 450 mm

50 = 500 mm

55 = 550 mm

60 = 600 mm

#### 4..Rear./front.adapter.hole.position<sup>2</sup>

M0 = both adaptors at 0° (standard position)

M1 = rear adaptor at 30°, front at 0°

M2 = rear adaptor at 60°, front at 0°

M3 = rear adaptor at 90°, front at 0°

M4 = rear adaptor at 120°, front at 0°

M5 = rear adaptor at 150°, front at 0°

MF = rear and front adaptor at 90°

#### 5..Options<sup>3</sup>

N = no option

B = anti coast brake<sup>3</sup>

NPO = potentiometer


NHW = manual override<sup>4</sup>

BPO = anti coast brake and potentiometer<sup>3</sup>

BHW = anti coast brake and manual override<sup>3/4</sup>


<sup>1</sup> 05A65M not possible with 400 Vac input voltage.

<sup>2</sup> Definition of adapter hole positions.

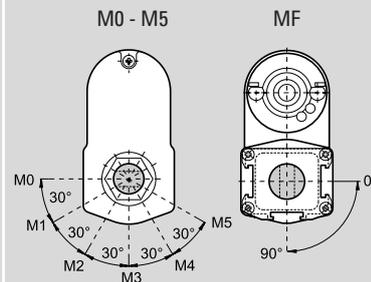

<sup>3</sup> Ball screw versions must always be ordered with an anti coast brake while acme versions can be ordered with or without an anti coast brake.

<sup>4</sup> Dimensions for manual override option.

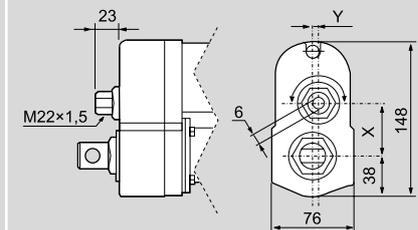

Model	X	Y
05A(B)65M	49,6	0,0
10A(B6)5M	43,3	5,2
20(21)A(B)65M	38,9	0,0

# Ordering.Keys

## Lifting Columns

TC16				
1	2	3	4	5
TC16.-24	T12M	300	291	X
<b>1..Model.and.input.voltage</b> TC16-24 = TC16, 24 Vdc  <b>2..Dynamic.load.capacity.</b> T12M = 2000 N		<b>3..Stroke.(S)<sup>1/3</sup></b> ••• = distance in mm  <b>4..Length.of.the.retracted.unit.(L)<sup>2</sup></b> ••• = distance in mm		<b>5..Options</b> X = no option E = encoder  <sup>1</sup> S min. = 200 mm S max. = 600 mm Max. possible stroke = L × 2 - 282 mm  <sup>2</sup> L min. = 250 mm L max. = 600 mm  <sup>3</sup> See note 2 on page 32 for information on stroke, max. cycle length and max. on time restrictions.



DMD			
1	2	3	4
DMD24.-	10B5.-	16	PO
<b>1..Model.and.input.voltage</b> DMD12 - = DMD, 12 Vdc DMD24 - = DMD, 24 Vdc DMD36 - = DMD, 36 Vdc	<b>2..Dynamic.load.capacity,screw.type.and.maximum.speed.</b> 05A5 - = 1100 N, acme, 54 mm/s 10A5 - = 2250 N, acme, 30 mm/s 20A5 - = 2250 N, acme, 15 mm/s 05B5 - = 2250 N, ball, 61 mm/s 10B5 - = 4500 N, ball, 30 mm/s 20B5 - = 4500 N, ball, 15 mm/s 21B5 - = 6800 N, ball, 15 mm/s	<b>3..Stroke.</b> 04 = 4 inch (101,6 mm) 06 = 6 inch (152,4 mm) 08 = 8 inch (203,2 mm) 10 = 10 inch (254,0 mm) 12 = 12 inch (304,8 mm) 14 = 14 inch (355,6 mm) 16 = 16 inch (406,4 mm) 18 = 18 inch (457,2 mm) 20 = 20 inch (508,0 mm) 24 = 24 inch (609,6 mm)	<b>4..Options<sup>1</sup></b> PO = potentiometer  <sup>1</sup> Leave position blank for no option.

DMA			
1	2	3	4
DMA22.-	20A5.-	06	
<b>1..Model.and.input.voltage</b> DMA22 - = DMA, 1 × 230 Vac DMA42 - = DMA, 3 × 400 Vac	<b>2..Dynamic.load.capacity,screw.type.and.maximum.speed</b> 05A5 - = 1100 N, acme, 54 mm/s <sup>1</sup> 10A5 - = 2250 N, acme, 30 mm/s 20A5 - = 2250 N, acme, 15 mm/s 05B5 - = 2250 N, ball, 61 mm/s 10B5 - = 4500 N, ball, 30 mm/s 20B5 - = 4500 N, ball, 15 mm/s 21B5 - = 6800 N, ball, 15 mm/s	<b>3..Stroke.</b> 04 = 4 inch (101,6 mm) 06 = 6 inch (152,4 mm) 08 = 8 inch (203,2 mm) 10 = 10 inch (254,0 mm) 12 = 12 inch (304,8 mm) 14 = 14 inch (355,6 mm) 16 = 16 inch (406,4 mm) 18 = 18 inch (457,2 mm) 20 = 20 inch (508,0 mm) 24 = 24 inch (609,6 mm)	<b>4..Options<sup>2</sup></b> PO = potentiometer  <sup>1</sup> 05A5 not possible with 400 Vac input voltage. <sup>2</sup> Leave position blank for no option.


# Ordering.Keys

## Rodless Actuators

LM80-H						
1	2	3	4	5	6	7
DT24.-	B62M.-	140	A	C	H	X
<b>1..Model.and.input.voltage</b> DT12 - = LM80, 12 Vdc DT24 - = LM80, 24 Vdc  <b>2..Load.torque.capacity.and.screw.type</b> T68M - = 250 Nm, trapezoidal B61M - = 400 Nm, ball B62M - = 180 Nm, ball B65M - = 750 Nm, ball		<b>3..Stroke</b> 050 = 500 mm 060 = 600 mm 070 = 700 mm 080 = 800 mm 090 = 900 mm 100 = 1000 mm 110 = 1100 mm 120 = 1200 mm 130 = 1300 mm 140 = 1400 mm 150 = 1500 mm		<b>4..Motor.position</b> A = 0° (standard) B = 60° C = 120° D = 180° F = 300°  <b>5..Motor.enclosure</b> C = with enclosure (IP44) U = no enclosure (IP33)  <b>6..Mounting.position</b> H = horizontal  <b>7..Options</b> X = no option H = manual override <sup>1</sup>  <sup>1</sup> Manual override dimensions. 4 mm hexagon key included Hexagon socket with plastic cover		



LM80-V						
1	2	3	4	5	6	7
DT24.-	B62M.-	140	A	C	V	X
<b>1..Model.and.input.voltage</b> DT12 - = LM80, 12 Vdc DT24 - = LM80, 24 Vdc  <b>2..Load.torque.capacity.and.screw.type</b> T68M - = 250 Nm, trapezoidal B61M - = 400 Nm, ball B62M - = 180 Nm, ball B65M - = 750 Nm, ball		<b>3..Stroke</b> 050 = 500 mm 060 = 600 mm 070 = 700 mm 080 = 800 mm 090 = 900 mm 100 = 1000 mm 110 = 1100 mm 120 = 1200 mm 130 = 1300 mm 140 = 1400 mm 150 = 1500 mm		<b>4..Motor.position</b> A = 0° (standard) B = 60° C = 120° D = 180° F = 300°  <b>5..Motor.enclosure</b> C = with enclosure (IP44) U = no enclosure (IP33)  <b>6..Mounting.position.and.spline.safety.function</b> V = vertical with motor down, no spline safety function F = vertical with motor down, with spline safety function  <b>7..Options</b> X = no option H = manual override (see LM80-H above for dimensions)		



# Ordering.Keys



## Rodless Actuators

LM80-I						
1	2	3	4	5	6	7
DT24.-	T68M.-	090	G	C	V	H
<b>1..Model.and.input.voltage</b> DT24 - = LM80, 24 Vdc  <b>2..Load.torque.capacity.and.screw.type</b> T68M - = 250 Nm, trapezoidal B61M - = 400 Nm, ball B62M - = 180 Nm, ball B65M - = 750 Nm, ball		<b>3..Stroke</b> 050 = 500 mm 060 = 600 mm 070 = 700 mm 080 = 800 mm 090 = 900 mm 100 = 1000 mm 110 = 1100 mm 120 = 1200 mm 130 = 1300 mm 140 = 1400 mm 150 = 1500 mm		<b>4..Motor.position</b> G = in line  <b>5..Motor.enclosure</b> C = with enclosure (IP44)  <b>6..Mounting.position.and.spline.safety.function</b> V = vertical with motor down, no spline safety function  <b>7..Options</b> X = no option H = manual override <sup>1</sup> E = encoder K = manual override + encoder  <sup>1</sup> Manual override dimensions.		

# Ordering.Keys

## Non-driven Actuators

Electrak PPA-M			
1	2	3	4
PPA00.-	01B65.-	24	N-XXX
<b>1..Model</b> PPA00 - = Electrak PPA-M	<b>2..Dynamic.load.capacity.</b> 01B65 - = 6670 N	<b>3..Stroke.</b> 04 = 4 inch (101,6 mm) 06 = 6 inch (152,4 mm) 08 = 8 inch (203,2 mm) 12 = 12 inch (304,8 mm) 18 = 18 inch (457,2 mm) 24 = 24 inch (609,6 mm) 36 = 36 inch (914,4 mm)	<b>4..Bellows.option</b> N-XXX = no bellows N-XXC = bellows

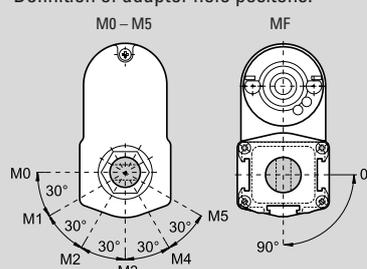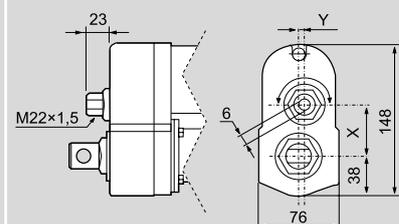FA14																
1	2	3	4	5												
FA14.-	10A65M	35	M2	N												
<b>1..Model</b> FA14 - = Electrak FA14	<b>2..Dynamic./static.load.capacity.and.screw.type.</b> 05A65M = 1100 / 11350 N, acme 10A65M = 2250 / 11350 N, acme 20A65M = 2250 / 11350 N, acme 05B65M = 2250 / 18000 N, ball 10B65M = 4500 / 18000 N, ball 20B65M = 4500 / 18000 N, ball 21B65M = 6800 / 18000 N, ball	<b>3..Stroke.</b> 05 = 50 mm 10 = 100 mm 15 = 150 mm 20 = 200 mm 25 = 250 mm 30 = 300 mm 35 = 350 mm 40 = 400 mm 45 = 450 mm 50 = 500 mm 55 = 550 mm 60 = 600 mm	<b>4..Rear./front.adapter.hole.position<sup>1</sup></b> M0 = both adaptors at 0° (standard) M1 = rear adaptor at 30°, front at 0° M2 = rear adaptor at 60°, front at 0° M3 = rear adaptor at 90°, front at 0° M4 = rear adaptor at 120°, front at 0° M5 = rear adaptor at 150°, front at 0° MF = rear and front adaptor at 90°	<b>5..Options</b> N = no option HW = manual override <sup>2</sup>												
		<b>1<sup>1</sup> Definition of adapter hole positons.</b>	<b>2<sup>2</sup> Dimensions for manual override option.</b>													
																
			<table border="1"> <thead> <tr> <th>Model</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>05A(B)65M</td> <td>49,6</td> <td>0,0</td> </tr> <tr> <td>10A(B)65M</td> <td>43,3</td> <td>5,2</td> </tr> <tr> <td>20(21)A(B)65M</td> <td>38,9</td> <td>0,0</td> </tr> </tbody> </table>		Model	X	Y	05A(B)65M	49,6	0,0	10A(B)65M	43,3	5,2	20(21)A(B)65M	38,9	0,0
Model	X	Y														
05A(B)65M	49,6	0,0														
10A(B)65M	43,3	5,2														
20(21)A(B)65M	38,9	0,0														

- page intentionally left blank -

# Glossary

## A – C

### Acme Screw

Acme screws are self locking and will not backdrive. They also withstand vibration and shock better than ball or worm screws and are used for applications with these characteristics. Also see “lead screw”.

### Actuator Housing

The actuator housing provides environmental protection for the internal components and may also be a structural member of the actuator.

### Adapters

The front and rear adapters are the connection points for mounting most Thomson actuators. The front adapter is usually a cross hole but optionally may be a tapped hole, threaded rod, or universal rod end. The rear adapter may be cast into the actuator housing or held in place with a nut.

### Adjustable End of Stroke Limit Switches

The adjustable end of stroke limit switches may be moved to positions inside the full stroke of the actuator and will shut off the actuator when it reaches the limit switch. Also see “end of stroke limit switches”.

### Anti Coast Brake/Electrical Brake

Depending on the load, AC ball screw actuators may coast to a stop when power is removed. This overrun is eliminated by an anti coast brake or an electrical brake. The anti coast brake (pawl type) will allow up to one revolution of the motor after power is removed. They are used on the Electrak 5 and PPA-AC with anti coast brake. An electrical brake (electrically released) operates much faster after power is removed and allow less coast than the pawl type. Electrak 205 and the PPA-AC with electrical brake use this type of brake. Also see “brake”.

### Anti Rotation Mechanism

A feature available on some actuators that resolves the restraining torque within the actuator. The extension tube will not rotate on actuators with this feature.

### Auto Reset Thermal Switch

An auto reset thermal will switch off the motor if it becomes too warm which means that the motor has exceeded its maximum allowed duty cycle. When the motor has cooled of the switch will close again automatically and the motor will start to run if power still is being applied to it. Also see “duty cycle”.

### Ball Screw

Ball screws are highly efficient and are used for high loads and speeds. Also see “lead screw”.

### Brake

Actuators using a acme or worm screw are inherently self-locking while ball screw driven actuators are not. To prevent ball screw actuators from backdriving they incorporate an anti backdriving brake (holding brake). Ball screw actuators with an AC motor can also be equipped with an anti coast brake. Also see “anti coast brake/electrical brake” and “holding brake”.

### Capacitor

The AC actuators use permanent split capacitor motors and require the use of a start/run capacitor in the control circuit to operate. The controls for the AC actuators have the capacitor included in the control. For customer supplied controls, a separate capacitor is required and the part number is included on the actuator product page.

### Certificates

CE certification and UL listing are the two main third party approvals available for actuators. Most of the AC actuators are UL listed as standard and UL has no standard for DC actuators under 48 Vdc. All actuators sold in the EU are CE certified while some actuators sold outside of the EU may not be. If you order your actuator outside of the EU and need a CE certification, contact the factory to verify availability and be sure to include the request on your order.

### Controls

Controls can be external to the actuator and provide the actuator with the correct voltage, have either membrane or pendant operators and some have position indicators. The Pro series also has internal controls that continuously monitor the operation of the actuator.

### Cover Tube

The cover tube provides protection for the lead screw and provides protection and support for the extension tube. For the Electrak 100 and PPA and as an option on the Electrak 205 actuators, the cover tube also provides the rear mounting connection.

### Customization

Even the most versatile actuator may not always suit all applications. But whatever your need is, our engineers are ready to help you to customize the actuators according to your requirements. We build more exclusive actuators than anyone else and have decades of experience of producing actuators to meet special needs.

# Glossary

## D – G

### Duty Cycle


$$\text{Duty cycle} = \frac{\text{on time}}{(\text{on time} + \text{off time})}$$

Example: 15 seconds on, 45 seconds off

$$\frac{15 \text{ s}}{(15 \text{ s} + 45 \text{ s})} = 25\% \text{ duty cycle}$$


The duty cycle is a function of the maximum rated load and the ambient temperature. Ambient temperatures above the stated will affect the duty cycle negatively while lower temperatures and/or lower load will affect it positively. Review the following duty cycle versus load charts when higher duty cycles are needed for Electrak 1, Electrak 10 or DMD actuators.

Electrak 1, Electrak 1SP

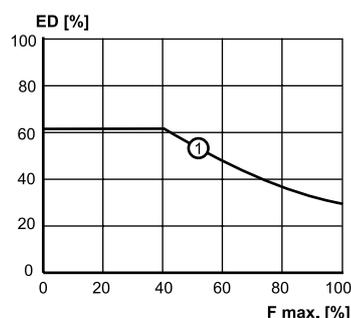

ED: duty cycle in percent at 25° C  
 F max: percent of maximum rated load  
 1: all Electrak 1 and Electrak 1SP models

Electrak 10, DMD

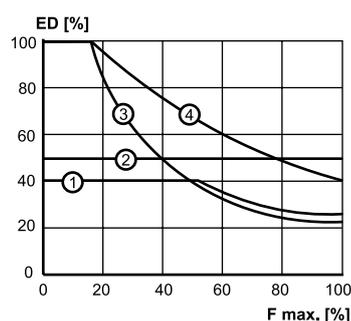

ED: duty cycle in percent at 25° C  
 F max: percent of maximum rated load  
 1: D •• -10A5 (acme screw)      3: D •• -05B5 (ball screw)  
 2: D •• -20A5 (acme screw)      4: D •• -20B5 (ball screw)

### Dynamic Load

The dynamic load rating is how much load the actuator will move when power is applied. Also see "load rating".

### Dynamic Braking

Dynamic braking is a feature on the Pro series which short circuits the motor windings at power off resulting in a shorter

coasting distance before the actuator comes to a complete stop. Dynamic braking can be accomplished on other dc actuators by wiring the control to short the motor leads when power is removed.

### Electronic Limit Switches (ELS)

ELS stands for Electronic Limit Switches and it is a current sensing function used in some actuator control models. The ELS senses the current and if the current exceeds a pre-set level the control cuts the power to the motor. This function can be used to detect and stop at the ends of the actuator stroke or to stop the actuator if it runs into an obstacle.

### Electronic Load Monitoring (ELM)

A built-in microprocessor inside the Pro series actuators continuously monitors the performance of the actuator. The microprocessor will stop the movement at the end of stroke, in case of mid stroke stall, at overload conditions or if the duty cycle is too high. It also eliminates the need of a clutch and provides dynamic braking.

### Encoder Feedback

Encoders provide a digital output signal that can be used to determine the position of the extension tube. An encoder equipped actuator must return to a "home" position if power is removed and restored in order to reset its starting point. Also see "potentiometer feedback".

### End of Stroke Limit Switches

End of stroke limit switches are switches that are incorporated in some actuator models, either as standard or as an option, that will shut off power when the end of stroke is achieved. Also see "fixed end of stroke limit switches" and "adjustable end of stroke limit switches".

### End Play (Backlash)

The stack up of tolerances within the lead screw assembly and gearing allowing some linear movement of the extension tube without rotating the motor. Typical end play or backlash varies by model. The range is 0,3 to 2,0 mm.

### Extension Tube

The extension tube slides in and out of the actuator and is connected via the front adaptor to the load being moved or positioned.

### Fixed End of Stroke Limit Switches

The fixed end of stroke limit switches allow the full stroke of the actuator to be used and will shut off power when the end of stroke is achieved. Also see "end of stroke limit switches".

# Glossary

## H – Life

### Holding Brake

The Electrak 1, 2, 050, 150 and some Pro series incorporate an acme screw which is inherently self-locking while Electrak 5, 10, 100, 205 and the high load Pro series actuators have a ball screw drive incorporating an anti backdriving brake (holding brake) that engages when the actuator has come to a complete stop. Also see “brake”.

### Input Voltage

The nominal voltage required to operate the actuator. All actuators will accept at least a  $\pm 10\%$  variation of the nominal voltage but a change in the voltage will result in a change of the speed of dc actuators. Controls are available that accept 115 or 230 Vac input and provide 24 Vdc output to operate 24 Vdc actuators.

### Installation Instructions

Each actuator has an installation manual to answer typical questions about mounting and wiring the actuators.


### Lead Screw

Actuators use four different types of lead screws depending on the configuration and load requirements of the actuator. Ball screws are highly efficient and are used for high loads and speeds. Acme, worm and trapezoidal screws are self locking and will not backdrive. Acme and trapezoidal screws withstand vibration and shock better than the other and are used for applications with these characteristics.

### Lifetime Expectancy


Life is a function of load, stroke length and how often the overload clutch is operated. The following life versus load charts will provide a life estimate for your particular application. Contact customer service for more information or for information on other actuator models.

#### Electrak 1, Electrak 1SP

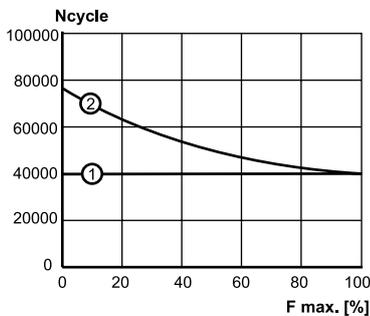

Ncycle: life in number of cycles (one cycle = extend and retract)  
F max: percent of maximum rated load  
1: Electrak 1 when using the internal limit switches for end of stroke  
2: both models when using external limit switches for end of stroke


#### Electrak 10, DMD - Acme Screw Models

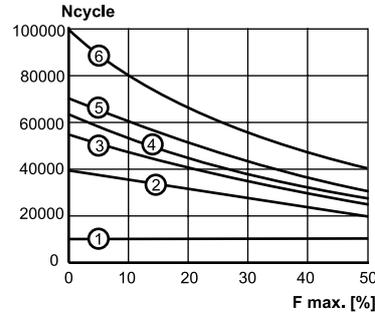

Ncycle: life in number of cycles (one cycle = extend and retract)  
F max: percent of maximum rated load  
1: all models using the clutch at end of stroke  
2: D •• -20A5, 12 inch stroke  
3: D •• -20A5, 8 inch stroke  
4: D •• -10A5, 12 inch stroke  
5: D •• -10A5, 8 inch stroke and D •• -20A5, 4 inch stroke  
6: D •• -10A5, 4 inch stroke

Contact customer service if you need life estimates for loads above 1125 N or stroke lengths above 12 inch.

#### Electrak 10, DMD - Ball Screw Models

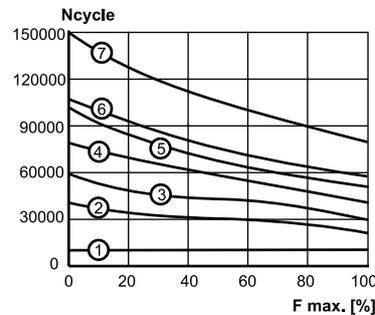


Ncycle: life in number of cycles (one cycle = extend and retract)  
F max: percent of maximum rated load  
1: all models using the clutch at end of stroke  
2: D •• -10B5 and D •• -20B5, 12 inch stroke  
3: D •• -10B5 and D •• -20B5, 8 inch stroke  
4: D •• -05B5, 12 inch stroke  
5: D •• -10B5 and D •• -20B5, 4 inch stroke  
6: D •• -05B5, 8 inch stroke  
7: D •• -05B5, 4 inch stroke

Contact customer service if you need life estimates for loads above 4500 N or stroke lengths above 12 inch.

#### Electrak 5, DMA - Ball Screw Models

# Glossary

## Lift – 0

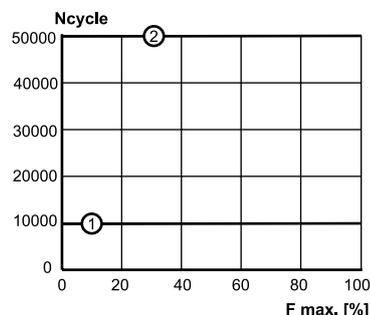

Ncycle: life in number of cycles (one cycle = extend and retract)

F max: percent of maximum rated load

1: all models using the clutch at end of stroke

2: all models using the anti-coast brake at end of stroke only

The above chart is only valid for ball screw models with rated load up to 4500 N and stroke lengths up to 12 inch. Contact customer service if you need life estimates for acme screw models or for higher loads or longer stroke lengths.

## Lifting Columns

Lifting columns provide a stable base for adjusting the height of tables or platforms. The column provides both the lifting force and the ability to resolve high moment forces from off axis loads.

## Linear Actuators

Actuators providing a linear thrust via an extension tube to lift, lower, push, pull or position a load.

## Load Rating

The load rating is the minimum amount of force the actuator will provide during its lifetime. The load rating of all rod style actuators is the same for both compression and tension loads. Also see "dynamic load", "static load" and "tension and compression load".

## Manual Override (Hand Wind)

Allows manual operation of the actuator in both directions in case of a power failure. The actuator accepts a standard hexagon key to rotate the motor in either direction. Optional on some models and standard on the Pro series.

## Maximum On Time

The maximum amount of time an actuator may operate without stopping to "cool off". For high load and long stroke actuators this may be one extend and retract cycle. The actuator should not exceed 25% duty cycle at full rated load. If no maximum on time is stated then the maximum on time are equal to one full cycle at the maximum dynamic load for the actuator in question.

## Mounting

Electrak actuators are quickly and easily mounted by slipping pins through the holes on each end of the unit and into brackets on the machine frame and the load. Electrak 100 units must be mounted by the cover tube and a swivel rod end. PPA actuators are mounted by the rear trunnions on the cover tube and the clevis on the extension tube. The Electrak 205 can be mounted by either the rear clevis or by a tube mount. 12,7 mm diameter solid pins (6,35 mm solid pins for Electrak 1 and 050) provide maximum holding strength and a retaining or cotter pin on each end will prevent the solid pin from falling out of its mounting bracket. Roll or spring type mounting pins should be avoided. The mounting pins must be parallel to each other as shown below (Fig. a). Pins which are not parallel may cause the actuator to bind. The load should act along the axis of the actuator since off center loads may cause binding (Fig. b).

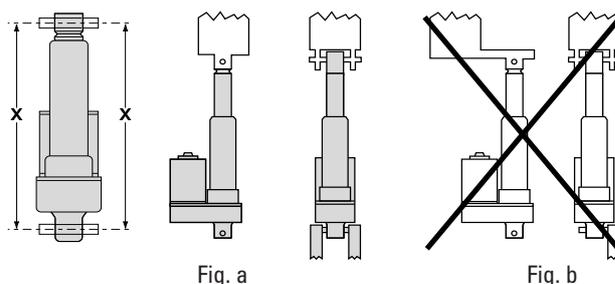


Fig. a

Fig. b

## Non-driven Actuators

Actuators supplied without a motor and driven manually or by a customer supplied motor.

## Operating and Storage Temperature

The operating temperature is the range in which the actuator may be safely operated. For the high end of the range, the duty cycle will be lower than 25%. All actuators can be stored or transported at the same temperature as the operating temperature. Contact customer support if the operating temperature will be exceeded during storage or transportation.

## Output Voltage

Output voltage is the voltage from the control to run the actuator. The controls for dc actuators have 24 Vdc output. The controls for ac actuators have either 115 or 230 Vac output.

## Overload Clutch

Electrak 050, 2, 5, 10, 100, 205 and PPA series linear actuators are protected by a load limiting mechanical clutch which prevents the motor from stalling at either end of the actuator stroke. It will also slip when the factory-set load limit is exceeded. The clutch is a ball detent design, assuring a consistent slip point and long life.

# Glossary

## P – Si

### Potentiometer Feedback

Potentiometers provide an analog output signal that can be used to determine the position of the extension tube. A potentiometer will “remember” its position if power is removed and restored. All potentiometers are set to a minimum value on full retract except for the EU versions of Electrak 5 and Electrak 10 where the minimum value are set on full extend. Also see “encoder feedback.”

### Programmable Limit Switches

An optional control contained inside the Pro series to which an external programming box or customer supplied switches can be connected to set and reset the end of stroke limits as often as needed. The programming box has a “jog to position” switch and a “set limit” switch.

### Protection Class

The protection class refers to the environmental rating of the enclosure. The first digit applies to airborne contaminants and the second digit to water/moisture.

- IP33: protected against the penetration of solid objects with a diameter greater than 12 mm and against direct sprays of water up to 60 degrees from vertical.
- IP44: protected against the penetration of solid objects with a diameter greater than 1 mm and against water sprayed from any direction.
- IP45: protected against the penetration of solid objects with a diameter greater than 1 mm and low pressure water jets from any direction.
- IP51: protected from dust and vertical dripping water/condensation.
- IP52: protected from dust and dripping water/condensation falling at an angle up to 15 degrees from vertical.
- IP56: protected from dust and high pressure water jets from any direction.
- IP65: dust tight and protected against low pressure water jets from any direction.
- IP66: dust tight and protected against high pressure water jets from any direction.
- IP67: dust tight and protected against the effect of immersion in water between 150 mm (5.9 inch) and 1 meter (39.4 inch).

### Pulse Width Modulation (PWM)

Pulse width modulation control works by switching the power supplied to the motor on and off very rapidly. The DC voltage is converted to a square-wave signal, alternating between fully on and zero, giving the motor a series of power “kicks”. If the switching frequency is high enough, the motor runs at a steady speed due to its fly-wheel momentum. By adjusting the duty cycle of the signal (modulating the width of the pulse, hence the ‘PWM’), the time fraction it is “on”, the average power can be varied, and hence the motor speed. All DC actuators can

be speed controlled by PWM within certain limits without any adjustments except for the Pro series that due to the internal electronics must have a steady power supply.

### Restraining Torque

The torque which is developed between the clevis on the extension tube and rear mount(clevis or trunnion) when the unit extends or retracts and ratchets the clutch (Fig. c).

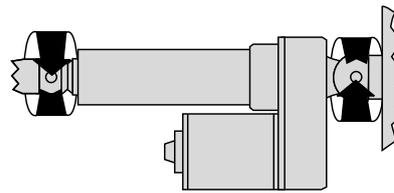


Fig. c

### Rodless Actuators

Rodless actuators provide support for the load as well as thrust. The load is supported and moved by a carriage on the actuator rather than pushed or pulled by an extension rod. Rodless actuators are ideal for applications requiring long strokes (up to 1500 mm), high speeds (up to 110 mm/s), movement of the load within the shortest envelope possible or the load supported by the actuator.

### RoHS Compliance

All actuators, controls and accessories sold in the EU are RoHS compliant unless otherwise stated, while products sold outside of the EU may not be. If you order an actuator outside of the EU and need it to be RoHS compliant, contact the factory to verify availability and be sure to include the request on your order.

### Rotary Actuators

Actuators providing a rotary output to position a load, turn a winch, or rotate a gear or sprocket.

### Service and Maintenance

Actuators are generally maintenance free. The Electrak 2, 5, 10, 100, 205 and Pro series have repair kits available from your local distributor or OEM.

### Signal Follower Input / Control

An optional control contained inside the Pro series actuators that will cause the extension tube position to follow a customer supplied potentiometer signal. Also known as a position follower control.

### Sizing and Selection

The Danahermotion.com web site includes a product advisor that can be used to walk through the decision process for picking the best actuator and to get the ordering data for your choice. Go

# Glossary

## Sp – W

to [www.danahermotion.com/linear\\_actuator\\_advisor](http://www.danahermotion.com/linear_actuator_advisor) to find out more.

### Speed

DC actuators have a direct load/speed relationship. As the load increases, the speed of the dc actuators decreases. There are curves on each product page to show the speed from no load to full rated load. AC actuators have very little speed fluctuations based on load but there are load/speed curves on all the ac actuator product pages.

### Spline Safety Function

An optional safety function on the rodless actuator (LM80) that will stop downward motion in case the carriage (the moving member) collides with an obstacle. The motor will keep running but the carriage will stand still and not pull down on the obstacle. When reversing the motor rotation the carriage will automatically start to move upwards again.

### Static Load

The static load rating is how much load the actuator will hold with power off. The static load rating is normally twice the dynamic load rating. Also see "load rating". If nothing else is stated the static load rating is for the actuator extension tube being fully retracted. The static load rating will decrease as the tube extends.

### Synchronous Operation

Motor speed cannot be controlled with enough precision to ensure that the actuators will remain synchronized and a binding effect could take place. Non-driven actuators may be mechanically linked and thereby synchronized. Actuators equipped with an encoder can also be synchronized using controls designed for synchronous operation.

### Tension and Compression Load

A tension load tries to stretch the actuator and a compression load tries to compress the actuator (Fig. d). Most actuators can manage the same tension and compression load. Also see "load rating".

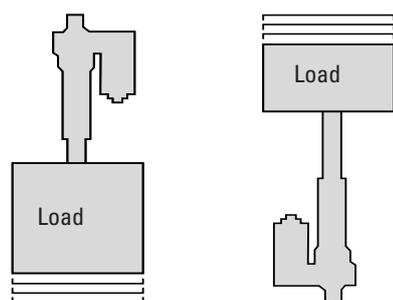


Fig. d

### Trapezoidal Screw

Screw type with similar characteristics as an acme screw. This type of screw is used in TC16 and LM80. Also see "acme screw" and "lead screw".

### Vent Tube

The Electrak 050 and 150 have a breather tube in the wiring harness to allow the actuator to operate without creating a vacuum and drawing water through the seals on the cover tube.

### Voltage Drop

Long leads/cables between the power source and the actuator will result in a voltage drop for DC units. This voltage drop can be avoided by sizing the leads in accordance with the following lead

cross section selection table. The table is based on an ambient temperature of 30 °C or less. A higher ambient temperature may result in the need for a greater lead cross section.

Lead Cross Section Selection Table [mm<sup>2</sup>]

Current draw [A]	Cable length [m]	Actuator input voltage [Vdc]		
		12	24	36
0 - 10	0 - 3	1,5	1,5	1,5
	3 - 6	2,5	1,5	1,5
	6 - 10	4	1,5	1,5
10 - 15	0 - 3	1,5	2,5	1,5
	3 - 6	2,5	2,5	1,5
	6 - 10	4	2,5	1,5
15 - 20	0 - 3	2,5	-	-
	3 - 6	4	-	-
	6 - 10	6	-	-
20 - 28	0 - 3	4	-	-
	3 - 6	6	-	-
	6 - 10	10	-	-
28 - 35	0 - 3	6	-	-
	3 - 6	6	-	-
	6 - 10	10	-	-

### Worm Screw

Worm screws are self locking and will not backdrive. This type of screw is used in Electrak 050. Also see "lead screw".

# Application.Data.Form

## Worksheet

Application Data Form*		
Submitted by:	Phone:	Date:
1. Company name	20. Do you need any special retracted length (cross hole c/c in mm)?	
2. Street address	21. Is anti-rotation of the extension tube required (yes/no)?	
3. City-state, zip	22. What is the input voltage?	
4. Contact name	23. Do you need any of the optional features of the actuator?	
5. Phone	24. How will the actuator be connected (standard or special cabling)?	
6. Fax	25. Is mating connector required if connector is included in the actuator?	
7. E-mail	26. Do you need any special paint or finish?	
8. What is the estimated annual volume?	27. Is manual override necessary?	
9. What is the target price?	28. What are the environmental conditions (dusty, outdoors, wash down)?	
10. What is the current or alternative solution?	29. What is the operation temperature range in Celsius?	
11. How much load is moved in Newton?	30. What is the duty cycle (on-time / on-time + off-time) in seconds?	
12. How much load do you need to hold in Newton?	31. Do you need any certificate (UL, CE, etc.)?	
13. How will the actuator be mounted (horizontal/vertical)?	32. Do you require any print (dwg, dxf, faxed)?	
14. Is the load trying to stretch or/and compress the actuator?	33. Describe any additional requirements (packaging, labeling, etc.)	
15. What speed do you want the actuator to move in mm/s?		
16. What is the life of the unit in cycles (one cycle = extend and retract)?		
17. What is the stroke length?		
18. How will the actuator be mounted to the extension tube?		
19. How will the actuator be mounted to the rear adaptor?		

\* Please enter all fields in the form and send it and any drawing to customer service by mail or fax. See the back of the catalog for the nearest location.

# Application Data Form

Drawing/notes

A large grid area for drawing or notes, consisting of 20 columns and 30 rows of small squares.

## EUROPE

### United Kingdom

Thomson  
Fishleigh Road  
Roundswell Business Park  
Barnstaple  
Devon, EX31 3UD  
Phone: +44 (0) 1271 334 500  
Fax: +44 (0) 1271 334 501  
E-mail: sales.uk@thomsonlinear.com

### Germany

Thomson  
Nürtinger Straße 70  
72649 Wolfschlügen  
Phone: +49 (0) 7022 504 0  
Fax: +49 (0) 7022 504 405  
E-mail: sales.germany@thomsonlinear.com

### France

Thomson  
Phone: +33 (0) 243 50 03 30  
Fax: +33 (0) 243 50 03 39  
E-mail: sales.france@thomsonlinear.com

### Italy

Thomson  
Largo Brughetti  
20030 Bovisio Masciago  
Phone: +39 0362 594260  
Fax: +39 0362 594263  
E-mail: info@danahermotion.it

### Spain

Thomson  
Rbla Badal, 29-31 7th, 1st  
08014 Barcelona  
Phone: +34 (0) 9329 80278  
Fax: +34 (0) 9329 80278  
E-mail: josep.estaran@thomsonlinear.com

### Sweden

Thomson  
Estridsväg 10  
29109 Kristianstad  
Phone: +46 (0) 44 24 67 00  
Fax: +46 (0) 44 24 40 85  
E-mail: sales.scandinavia@thomsonlinear.com

## USA, CANADA and MEXICO

Thomson  
203A West Rock Road  
Radford, VA 24141, USA  
Phone: 1-540-633-3549  
Fax: 1-540-633-0294  
E-mail: thomson@thomsonlinear.com  
Literature: literature.thomsonlinear.com

## ASIA

### Asia Pacific

Thomson  
Unit A, 16 Floor, 169 Electric Road  
Manulife Tower, North Point, Hong Kong  
Phone: +852 2503 6581  
Fax: +852 2571 8585  
E-mail: richard.teo@thomsonlinear.com

### China

Thomson  
Rm 2205, Scitech Tower  
22 Jianguomen Wai Street  
Beijing 100004  
Phone: +86 400 6661 802  
Fax: +86 10 6515 0263  
E-mail: sales.china@thomsonlinear.com

### India

Thomson  
Unit No 2, SDF 1 Seepz Andheri  
Mumbai 400 096  
Phone: +91 22 2829 4058  
Fax: +91 22 2839 4036  
E-mail: richard.teo@thomsonlinear.com

### Japan

Thomson  
Minami-Kaneden 2-12-23, Suita  
Osaka 564-0044 Japan  
Tel: +81-6-6386-8001  
Fax: +81-6-6386-5022  
E-mail: dicgj\_inquiry@danaher.co.jp

### Korea

Thomson  
#407, Kins Tower, Bundang Intellige 1, 25-1  
Jeongja-dong, Bundang-gu, Seongnam-city,  
Gyeonggi-do, Korea  
Phone: +82 31 784 8972  
Fax: +82 31 784 8980  
E-mail: aaron.kim@thomsonlinear.com

[www.thomsonlinear.com](http://www.thomsonlinear.com)

EU200609-02 LIM 3k TJO 5/2011 ENG  
Specifications are subject to change without notice. It is the responsibility of the product user to determine the suitability of this product for a specific application. All trademarks property of their respective owners. © Thomson Industries, Inc. 2011

 **THOMSON**<sup>®</sup>

*Linear Motion. Optimized.™*