



# RH 1S2M

## Dimensions (Unit:mm)

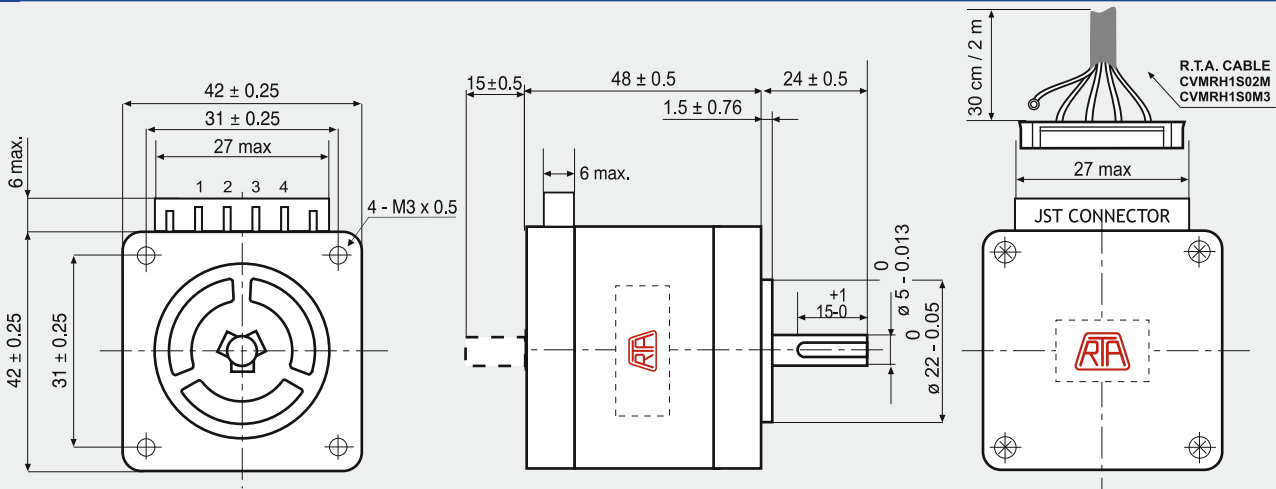


MOTOR CONNECTOR IS JST MOD. PHR-11 POLES MALE.  
FOR CONNECTION USE JST MOD. PHR-11 FEMALE CONNECTOR AND  
MOD. SPH-002T-P0.5S CONTACTS.  
**NOTE:** RH1S (RS) MOTORS NEED CVMRH1S02M OR  
CVMRH1S0M3 R.T.A. CABLES. CONTACT R.T.A. FOR FURTHER DETAILS.



## FEATURES

MODEL	RH 1S2M (RH 1S2M-RS)
BASIC STEP ANGLE	1,8°
BIPOLAR CURRENT (Amp)	1.0
UNIPOLAR CURRENT (Amp)	
RESISTANCE (Ohm)	5.3
INDUCTANCE (mH)	12.5
BIPOLAR HOLDING TORQUE (Ncm)	56
UNIPOLAR HOLDING TORQUE (Ncm)	
ROTOR INERTIA (Kg <sup>m</sup> ² x 10 <sup>-7</sup> )	63
THEORETICAL ACCELERATION (rad x sec. <sup>-2</sup> )	88900
BACK E.M.F. (V/Krpm)	56
MASS (Kg)	0.38
PROTECTION DEGREE	IP40
LEADS CODE	V

## TORQUE/SPEED CURVE

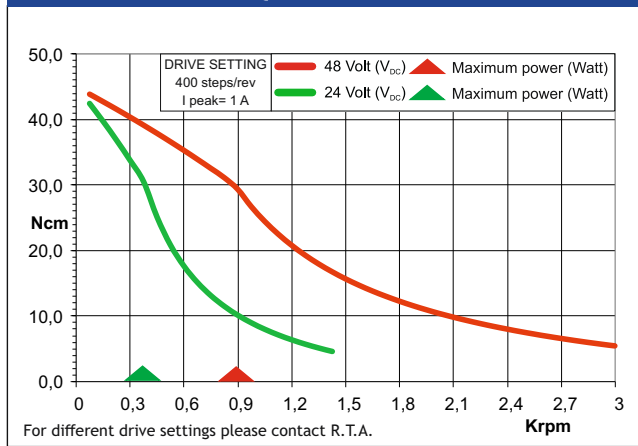

Codes between brackets refer to double shaft models.

R.T.A. MOTOR CABLE  
CVMRH1S02M  
CVMRH1S0M3

(4/B-) BROWN  
(3/B) YELLOW  
(2/A-) WHITE  
(1/A) GREEN

## Suggested R.T.A. drive series: BSD, CSD, FLEX-DRIVE



R.T.A. s.r.l.  
Via E. Mattei - Fraz- Divisa  
27020 Marcignago (PV) (Italy)  
T +39.0382.929.855  
F +39.0382.929.150  
www.rta.it

R.T.A. Deutschland GmbH  
Bublitzter Strasse 34, 40599  
Duesseldorf (Germany)  
T +49.211.749.668.60  
F +49.211.749.668.66  
www.rta-deutschland.de

R.T.A. IBERICA  
C/Generalitat 22, Local 1  
08850 Gava - Barcelona (Spain)  
T +34 936.388.805  
F +34 936.334.595  
www.rta-iberica.es

R.T.A. INDIA Pvt  
Teerth Business Center 3<sup>rd</sup> Floor, Unit No. 7,  
Block EL-15, MIDC Bhosari Pimpi-Chinchwd,  
Pune 411026 (India)  
Tel. +91 9422507445  
www.rta-india.in