


# RH 2S2M

## Dimensions (Unit:mm)

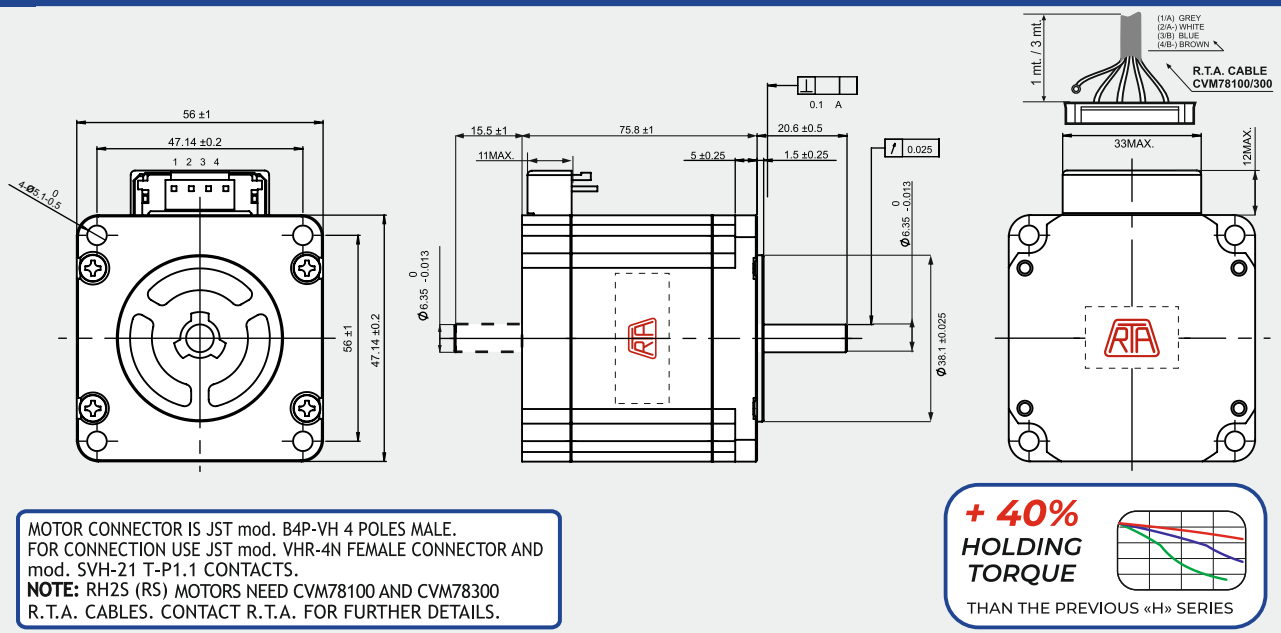


**+ 40%  
HOLDING  
TORQUE**

THAN THE PREVIOUS «H» SERIES

## FEATURES

MODEL	RH 2S2M (RH 2S2M-RS)	
BASIC STEP ANGLE	1.8 ± 0.09°	
BIPOLAR CURRENT	(Amp)	4.0
UNIPOLAR CURRENT	(Amp)	
RESISTANCE	(Ohm)	0.52
INDUCTANCE	(mH)	2.4
BIPOLAR HOLDING TORQUE	(Ncm)	235
ROTOR INERTIA	(Kg m <sup>2</sup> x 10 <sup>-7</sup> )	500
THEORETICAL ACCELERATION	(rad x sec. <sup>-2</sup> )	47000
BACK E.M.F.	(V/Krpm)	58.7
MASS	(Kg)	1.1
INTERNATIONAL STANDARDS	UL, CSA	
PROTECTION DEGREE	IP40	
LEADS CODE	V	

## TORQUE/SPEED CURVE

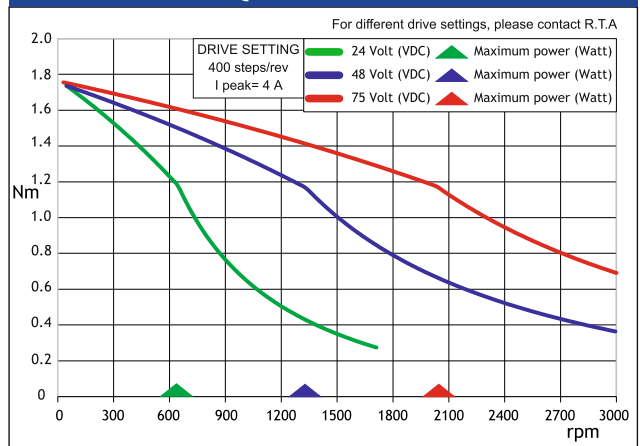

Codes between brackets refer to double shaft models.



## Suggested R.T.A. drive series: BSD, CSD, FLEX-DRIVE, NDC



R.T.A. s.r.l.  
Via E. Mattei - Fraz- Divisa  
27020 Marcignago (PV) (Italy)  
T +39.0382.929.855  
F +39.0382.929.150  
www.rta.it

R.T.A. Deutschland GmbH  
Bublitzter Strasse 34, 40599  
Duesseldorf (Germany)  
T +49.211.749.668.60  
F +49.211.749.668.66  
www.rta-deutschland.de

R.T.A. IBERICA  
C/Generalitat 22, Local 1  
08850 Gava - Barcelona (Spain)  
T +34 936.388.805  
F +34 936.334.595  
www.rta-iberica.es

R.T.A. INDIA Pvt  
Teerth Business Center 3<sup>rd</sup> Floor, Unit No. 7,  
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,  
Pune 411026 (India)  
Tel. +91 9422507445  
www.rta-india.in