


RM 3T2M-0XX0





Dimensions (Unit:mm)

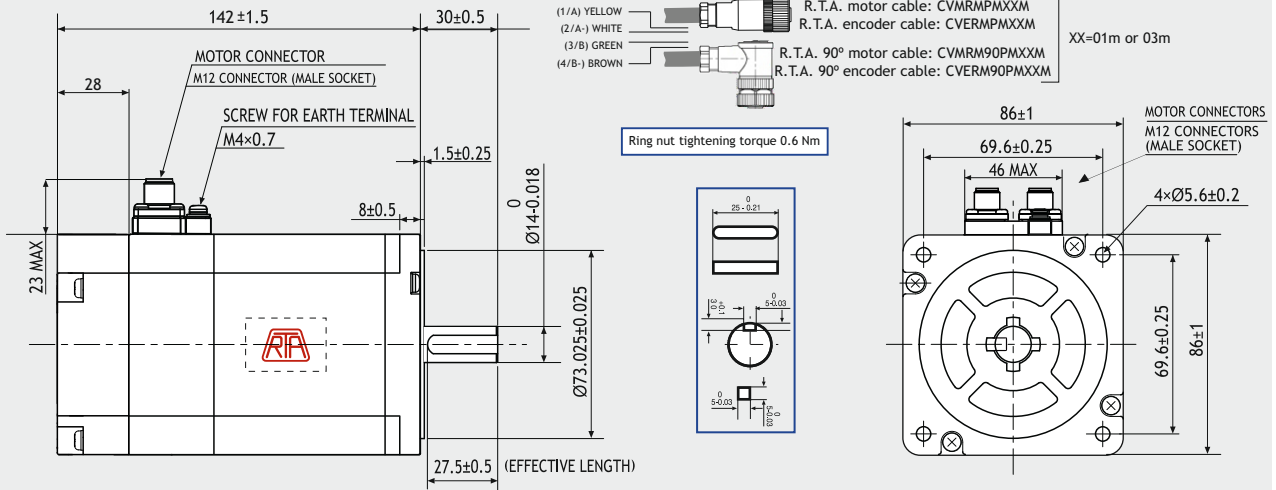

ENCODER OPTIONS:	RM 3T2M-04D0	RM 3T2M-04E0	RM 3T2M-0HE0
RESOLUTION	400 cpr	400 cpr	4000 cpr
INDEX	No	Yes	Yes
CURRENT CONSUMPTION (mA)	50	50	85
HIGH LEVEL OUTPUT (Volt)	5 (TIP) - 4.75 (MIN) (I _{max} =25mA)	3.4 (TIP) - 2.4 (MIN) (I _{max} =20mA)	3.4 (TIP) - 2.4 (MIN) (I _{max} =20mA)
LOW LEVEL OUTPUT (Volt)	0.25 (TIP) - 0.6 (MAX) (I _{max} =25mA)	0.2 (TIP) - 0.4 (MAX) (I _{max} =20mA)	0.2 (TIP) - 0.4 (MAX) (I _{max} =20mA)
OUTPUT SIGNAL	Differential	Differential	Differential
MAXIMUM FREQUENCY (KHz)	100	100	720
POWER SUPPLY VOLTAGE (Volt)	5 V _{dc} ± 10%	5 V _{dc} ± 10%	5 V _{dc} ± 10%

FEATURES	
MODEL	RM 3T2M
BASIC STEP ANGLE	1.8 ± 0.09°
BIPOLAR CURRENT (A)	4
RESISTANCE (Ohm)	0.83
INDUCTANCE (mH)	6.4
BIPOLAR HOLDING TORQUE (Ncm)	700
ROTOR INERTIA (Kgm ² x 10 ⁻⁷)	3000
THEORETICAL ACCELERATION (rad x sec. ⁻²)	23330
BACK E.M.F. (V/Krpm)	175
MASS (Kg)	3.1
INTERNATIONAL STANDARDS	UL, CSA, CE, RoHS
INSULATION VOLTAGE (V)	250 V _{AC} (350 V _{DC})
PROTECTION DEGREE - INSULATION CLASS	IP 54 - CLASS F
LEADS CODE	V

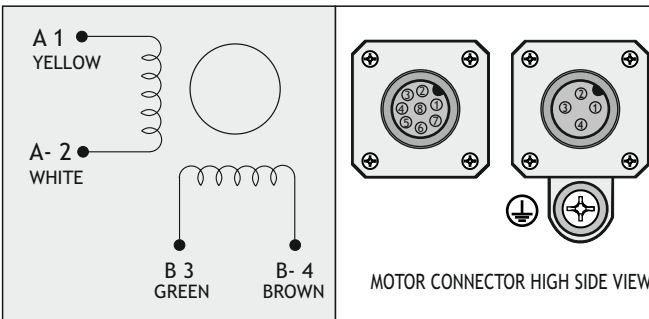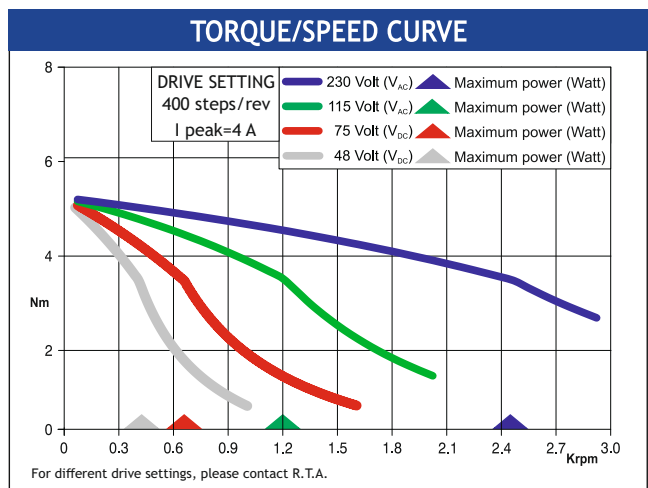

ENCODER CONNECTOR PIN-OUT			
DESCRIPTION	04D0 PINS	04E0/0HE0 PINS	R.T.A. CABLE LEADS COLOR
CHANNEL B+	3	3	GREEN
CHANNEL B-	4	4	PURPLE
CHANNEL A+	1	1	BLUE
CHANNEL A-	2	2	BROWN
+ DC (5V)	8	8	RED
GROUND	5	5	BLACK
INDEX+	/	7	ORANGE
INDEX-	/	6	WHITE

Suggested R.T.A. drive series: 230 Vac X-PLUS



R.T.A. s.r.l.
Via E. Mattei - Fraz- Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzstrasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwd,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in