


# SK<sup>+</sup> / SPK<sup>+</sup> – Space-saving right-angle precision with output shaft



SK<sup>+</sup>

The versatile hypoid gearbox with SP<sup>+</sup> compatible output shaft. SPK<sup>+</sup> gearboxes with planetary stage are especially suitable for high-precision applications requiring higher power and outstanding torsional rigidity.

The SK<sup>+</sup> / SPK<sup>+</sup> compared to the industry standard

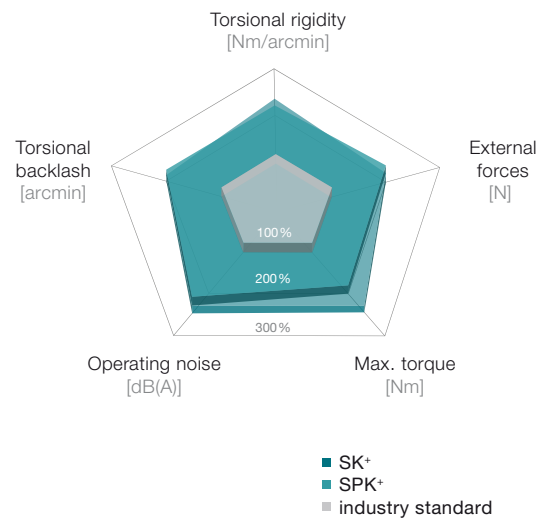

**Product highlights**

**Max. torsional backlash**  
 SK<sup>+</sup> ≤ 4 arcmin (Standard)  
 SPK<sup>+</sup> ≤ 4 arcmin (Standard)  
 ≤ 2 arcmin (Reduced)

**Diverse range of ratios**  $i = 3 - 10,000$

**Flexibility thanks to various output types**


**Other gearbox models**  
 Corrosional resistant design, ATEX (SK<sup>+</sup>)




SPK<sup>+</sup> in corrosion-resistant design



SK<sup>+</sup> with rearward shaft

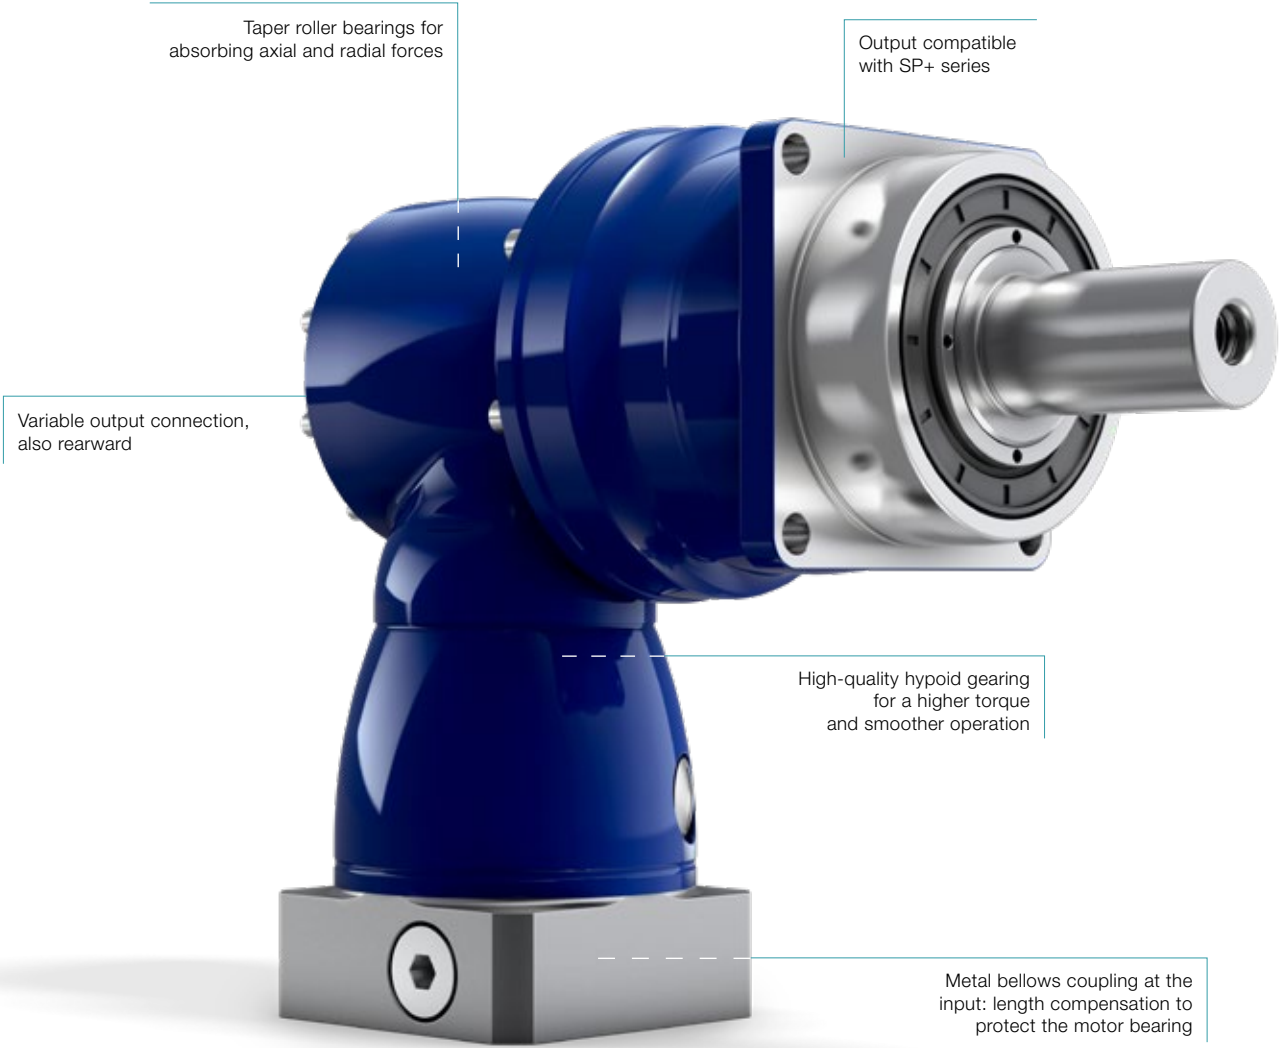

SPK+

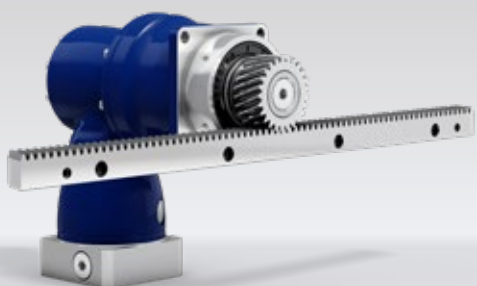

SPK+ with rack and pinion



SK+ with metal bellows coupling

# SK+ 060 MF 1-/2-stage

			1-stage					2-stage										
Ratio	<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	36	36	36	25	20	36	36	36	36	36	36	36	36	25	20	
		in.lb	319	319	319	221	177	319	319	319	319	319	319	319	319	319	221	177
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	30	30	30	25	20	30	30	30	30	30	30	30	30	25	20	
		in.lb	266	266	266	221	177	266	266	266	266	266	266	266	266	266	221	177
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	22	22	22	20	15	22	22	22	22	22	22	22	22	20	15	
		in.lb	195	195	195	177	133	195	195	195	195	195	195	195	195	195	177	133
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	40	50	50	45	40	50	50	50	50	50	50	50	50	45	40	
		in.lb	354	443	443	398	354	443	443	443	443	443	443	443	443	443	398	354
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2500	2700	3000	3000	3000	4400	4400	4400	4400	4400	4400	4400	4800	5500	5500	
Max. input speed	$n_{1Max}$	rpm	7500	7500	7500	7500	7500	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	1.5	1.4	1.1	1.5	1.4	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
		in.lb	13	12	9.7	13	12	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
Max. backlash	$j_t$	arcmin	Standard $\leq 5$															
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	2	2.1	2.2	2	1.8	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.2	2	1.8	
		in.lb/arcmin	18	19	19	18	16	19	19	19	19	19	19	19	19	18	16	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	2400															
		lb <sub>f</sub>	540															
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	2700															
		lb <sub>f</sub>	608															
Max. tilting moment	$M_{2KMax}$	Nm	251															
		in.lb	2222															
Efficiency at full load	$\eta$	%	96					94										
Service life	$L_h$	h	> 20000															
Weight (incl. standard adapter plate)	$m$	kg	2.9					3.2										
		lb <sub>m</sub>	6					7										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 64$															
		°C	+90															
Max. permitted housing temperature		F	194															
		°C	0 to +40															
Ambient temperature		F	32 to 104															
		°C	32 to 104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output opposite direction															
Protection class			IP 65															
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00030AA - 016.000 - X															
Bore diameter of coupling on the application side		mm	X = 010.000 - 030.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	$J_1$	kgcm <sup>2</sup>	-	-	-	-	-	0.09	0.09	0.07	0.07	0.06	0.06	0.06	0.06	
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	-	-	-	-	-	0.08	0.08	0.06	0.06	0.05	0.05	0.05	0.05	0.05
	C	14	$J_1$	kgcm <sup>2</sup>	0.52	0.44	0.4	0.36	0.34	0.2	0.2	0.19	0.19	0.18	0.18	0.17	0.17	0.17
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.46	0.39	0.35	0.32	0.3	0.18	0.18	0.17	0.17	0.16	0.16	0.15	0.15	0.15
	E	19	$J_1$	kgcm <sup>2</sup>	0.87	0.79	0.75	0.71	0.7	-	-	-	-	-	-	-	-	-
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.77	0.7	0.66	0.63	0.62	-	-	-	-	-	-	-	-	-



Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).

- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A



# 1-stage

up to 14/19<sup>4)</sup>  
(C<sup>5)</sup>/E) clamping  
hub diameter

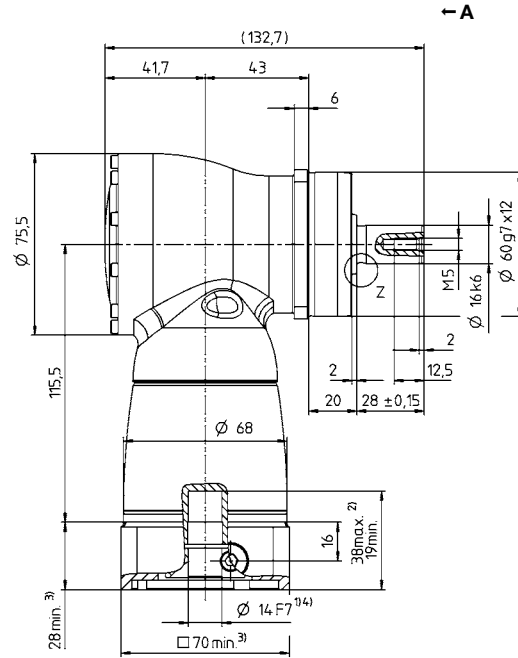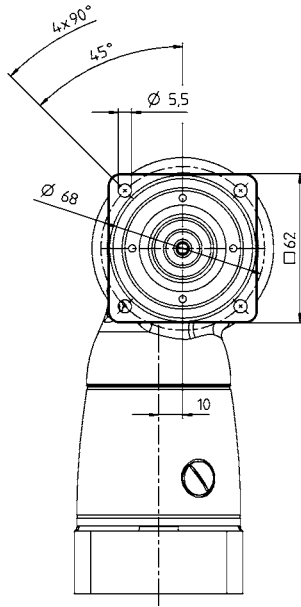

# 2-stage

up to 11/14<sup>4)</sup>  
(B<sup>5)</sup>/C) clamping  
hub diameter

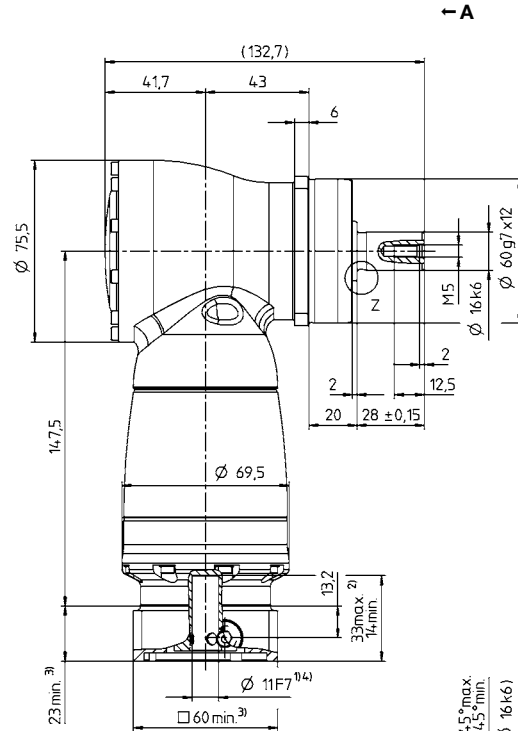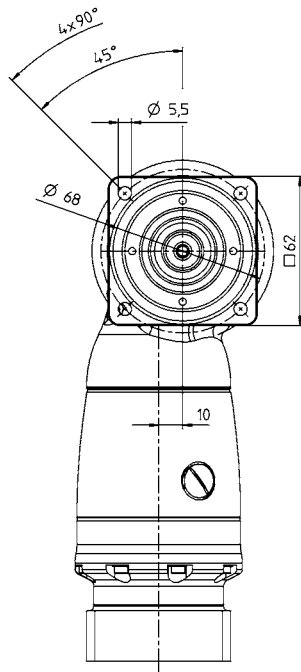


Motor shaft diameter [mm]

Hypoid gearboxes


SK\*

## Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- Non-tolerated dimensions are nominal dimensions
- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter

# SK+ 075 MF 1-/2-stage

			1-stage					2-stage											
Ratio	<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	84	84	84	60	50	84	84	84	84	84	84	84	84	60	50		
		in.lb	743	743	743	531	443	743	743	743	743	743	743	743	743	743	531	443	
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	70	70	70	60	50	70	70	70	70	70	70	70	70	60	50		
		in.lb	620	620	620	531	443	620	620	620	620	620	620	620	620	620	531	443	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	50	50	50	45	40	50	50	50	50	50	50	50	50	45	40		
		in.lb	443	443	443	398	354	443	443	443	443	443	443	443	443	443	398	354	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	95	115	115	110	100	115	115	115	115	115	115	115	115	110	100		
		in.lb	841	1018	1018	974	885	1018	1018	1018	1018	1018	1018	1018	1018	1018	974	885	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2300	2500	2800	2800	2800	3500	3500	3500	3500	3500	3500	3500	3800	4500	4500		
Max. input speed	$n_{1Max}$	rpm	7500	7500	7500	7500	7500	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000		
Mean no load running torque <sup>b)</sup> (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	2.4	2	1.8	2.2	2	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
		in.lb	21	18	16	19	18	2.7	2.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$																
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	5	5.5	6	6	6	5.5	5.5	5.5	5.5	5.5	5.5	5.5	6	6	6		
		in.lb/arcmin	44	49	53	53	53	49	49	49	49	49	49	49	53	53	53		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	3400																
		lb <sub>f</sub>	765																
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	4000																
		lb <sub>f</sub>	900																
Max. tilting moment	$M_{2KMax}$	Nm	437																
		in.lb	3868																
Efficiency at full load	$\eta$	%	96					94											
Service life	$L_h$	h	> 20000																
Weight (incl. standard adapter plate)	$m$	kg	4.8					5.4											
		lb <sub>m</sub>	11					12											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 66$																
Max. permitted housing temperature		°C	+90																
		F	194																
Ambient temperature		°C	0 to +40																
		F	32 to 104																
Lubrication			Lubricated for life																
Direction of rotation			In- and output opposite direction																
Protection class			IP 65																
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00080AA - 022.000 - X																
Bore diameter of coupling on the application side		mm	X = 014.000 - 042.000																
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	$J_i$	kgcm <sup>2</sup>	-	-	-	-	-	0.28	0.27	0.23	0.23	0.2	0.2	0.18	0.18	0.18	
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	-	-	-	-	-	0.25	0.24	0.2	0.2	0.18	0.18	0.16	0.16	0.16	0.16
	E	19	$J_i$	kgcm <sup>2</sup>	1.46	1.19	1.06	0.95	0.9	0.73	0.71	0.68	0.67	0.63	0.62	0.63	0.63	0.63	0.63
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	1.29	1.05	0.94	0.84	0.8	0.65	0.63	0.6	0.59	0.56	0.55	0.56	0.56	0.56	0.56
H	28	$J_i$	kgcm <sup>2</sup>	2.88	2.61	2.47	2.37	2.31	-	-	-	-	-	-	-	-	-	-	
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	2.55	2.31	2.19	2.1	2.04	-	-	-	-	-	-	-	-	-	-	-



Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).

- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A



# 1-stage

up to 19/28<sup>4)</sup>  
(E<sup>5)</sup>/H) clamping  
hub diameter

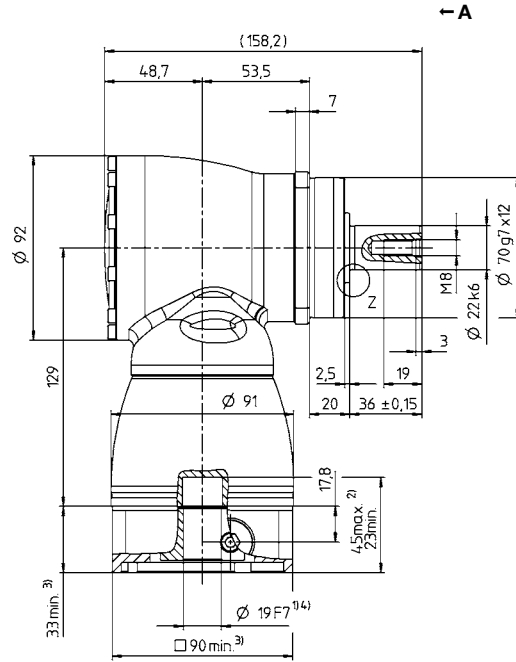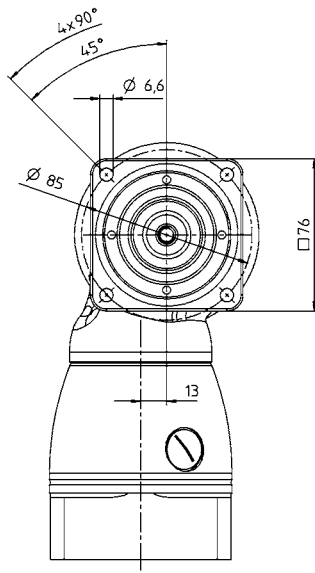

# 2-stage


up to 14/19<sup>4)</sup>  
(C<sup>5)</sup>/E) clamping  
hub diameter

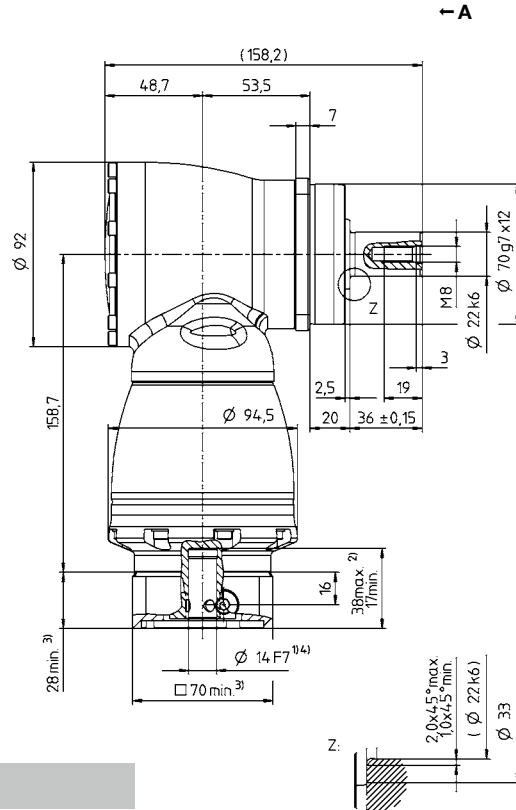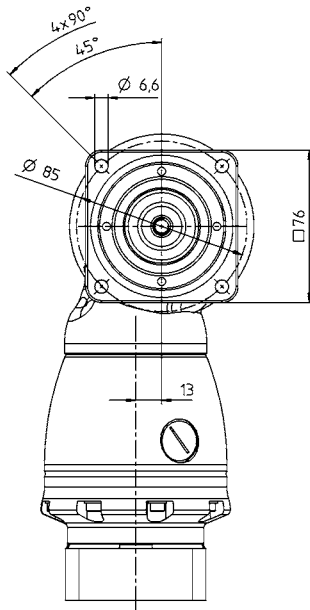


Motor shaft diameter [mm]

## Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter

Hypoid gearboxes

SK\*

# SK+ 100 MF 1-/2-stage

			1-stage					2-stage											
Ratio	<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	204	204	204	145	125	204	204	204	204	204	204	204	204	145	125		
		in.lb	1806	1806	1806	1283	1106	1806	1806	1806	1806	1806	1806	1806	1806	1806	1283	1106	
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	170	170	170	145	125	170	170	170	170	170	170	170	170	145	125		
		in.lb	1505	1505	1505	1283	1106	1505	1505	1505	1505	1505	1505	1505	1505	1505	1283	1106	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	100	100	100	90	80	100	100	100	100	100	100	100	100	90	80		
		in.lb	885	885	885	797	708	885	885	885	885	885	885	885	885	885	797	708	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	220	260	260	255	250	260	260	260	260	260	260	260	260	260	255	250	
		in.lb	1947	2301	2301	2257	2213	2301	2301	2301	2301	2301	2301	2301	2301	2301	2257	2213	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2200	2400	2700	2500	2500	3100	3100	3100	3100	3100	3100	3100	3100	3500	4200	4200	
Max. input speed	$n_{1Max}$	rpm	5500	5500	5500	5500	5500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	3.9	3.1	2.9	4.1	3.3	0.6	0.6	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2		
		in.lb	35	27	26	36	29	5.3	5.3	4.4	3.5	3.5	2.7	1.8	1.8	1.8	1.8		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$																
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	10	11	13	13	13	11	11	11	11	11	11	11	13	13	13		
		in.lb/arcmin	89	97	115	115	115	97	97	97	97	97	97	97	97	115	115	115	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	5700																
		lb <sub>f</sub>	1283																
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	6300																
		lb <sub>f</sub>	1418																
Max. tilting moment	$M_{2KMax}$	Nm	833																
		in.lb	7373																
Efficiency at full load	$\eta$	%	96					94											
Service life	$L_h$	h	> 20000																
Weight (incl. standard adapter plate)	$m$	kg	9.3					10											
		lb <sub>m</sub>	21					22											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 66$																
Max. permitted housing temperature		°C	+90																
		F	194																
Ambient temperature		°C	0 to +40																
		F	32 to 104																
Lubrication			Lubricated for life																
Direction of rotation			In- and output opposite direction																
Protection class			IP 65																
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00200AA - 032.000 - X																
Bore diameter of coupling on the application side		mm	X = 022.000 - 045.000																
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	$J_1$	kgcm <sup>2</sup>	-	-	-	-	-	1.02	0.97	0.86	0.84	0.75	0.74	0.69	0.68	0.68	
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	-	-	-	-	-	0.9	0.86	0.76	0.74	0.66	0.65	0.61	0.61	0.6	0.6
	G	24	$J_1$	kgcm <sup>2</sup>	-	-	-	-	-	2.59	2.54	2.42	2.4	2.31	2.3	2.26	2.25	2.25	2.25
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	-	-	-	-	-	2.29	2.25	2.14	2.12	2.04	2.04	2	1.99	1.99	1.99
	H	28	$J_1$	kgcm <sup>2</sup>	4.64	3.8	3.34	2.98	2.79	-	-	-	-	-	-	-	-	-	-
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	4.11	3.36	2.96	2.64	2.47	-	-	-	-	-	-	-	-	-	-
	K	38	$J_1$	kgcm <sup>2</sup>	11.9	11	10.6	10.2	10	-	-	-	-	-	-	-	-	-	-
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	10.53	9.74	9.38	9.03	8.85	-	-	-	-	-	-	-	-	-	-



Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).

- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A



# 1-stage

up to 28/38<sup>4)</sup>  
(H<sup>5)</sup>/K) clamping  
hub diameter

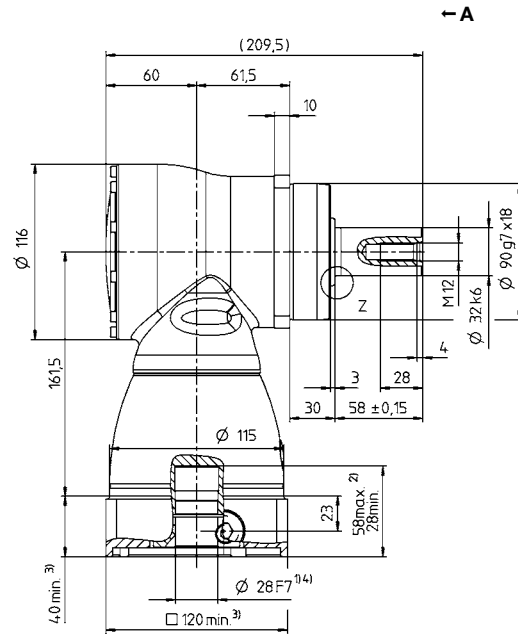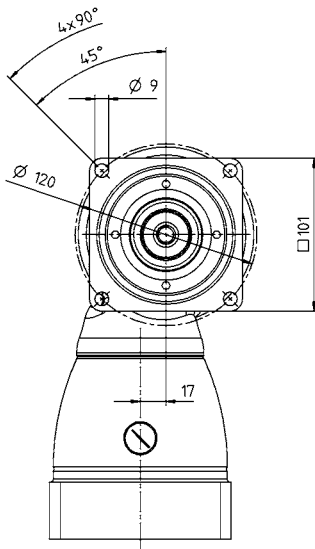

# 2-stage


up to 19/24<sup>4)</sup>  
(E<sup>5)</sup>/G) clamping  
hub diameter

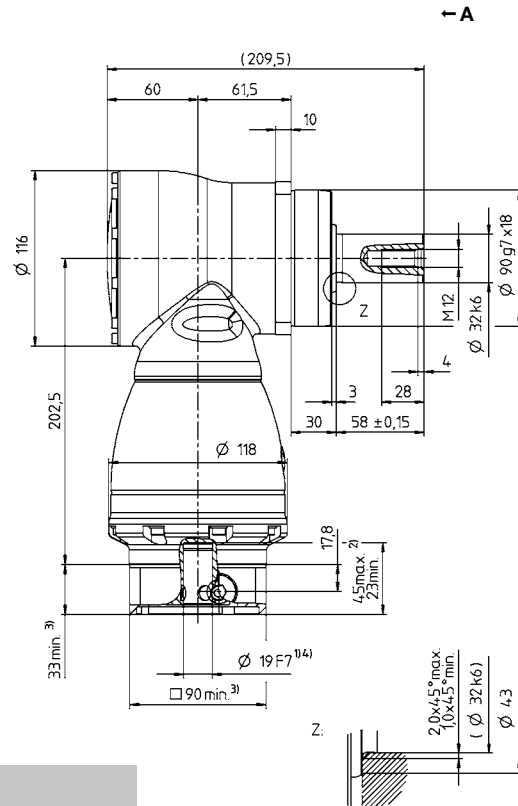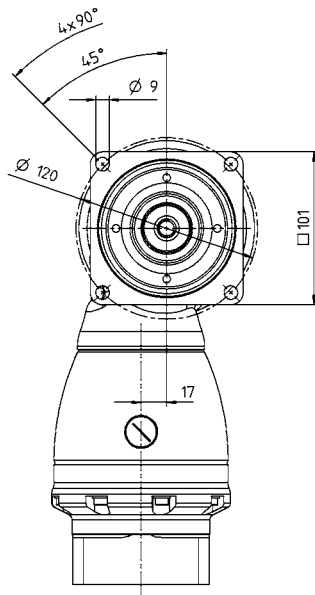


Motor shaft diameter [mm]

## Other output variants

Shaft with key



Spined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter



# SK+ 140 MF 1-/2-stage

			1-stage					2-stage											
Ratio	<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	360	360	360	250	210	360	360	360	360	360	360	360	360	250	210		
		in.lb	3186	3186	3186	2213	1859	3186	3186	3186	3186	3186	3186	3186	3186	2213	1859		
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	300	300	300	250	210	300	300	300	300	300	300	300	300	250	210		
		in.lb	2655	2655	2655	2213	1859	2655	2655	2655	2655	2655	2655	2655	2655	2213	1859		
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	190	190	190	175	160	190	190	190	190	190	190	190	190	175	160		
		in.lb	1682	1682	1682	1549	1416	1682	1682	1682	1682	1682	1682	1682	1682	1549	1416		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	400	500	500	450	400	500	500	500	500	500	500	500	500	450	400		
		in.lb	3540	4425	4425	3983	3540	4425	4425	4425	4425	4425	4425	4425	4425	3983	3540		
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	1900	2000	2200	2000	2000	2900	2900	2900	2900	2900	2900	2900	3200	3200	3900		
Max. input speed	$n_{1Max}$	rpm	5000	5000	5000	5000	5000	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	9.3	6.9	7.1	9.7	7.1	1.4	0.9	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3		
		in.lb	82	61	63	86	63	12	8.0	6.2	4.4	4.4	3.5	3.5	2.7	2.7	2.7		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$																
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	27	30	32	32	32	29	29	29	29	29	29	29	31	31	31		
		in.lb/arcmin	239	266	283	283	283	257	257	257	257	257	257	257	274	274	274		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	9900																
		lb <sub>f</sub>	2228																
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	9500																
		lb <sub>f</sub>	2138																
Max. tilting moment	$M_{2KMax}$	Nm	1692																
		in.lb	14976																
Efficiency at full load	$\eta$	%	96					94											
Service life	$L_h$	h	> 20000																
Weight (incl. standard adapter plate)	<i>m</i>	kg	22.6					25											
		lb <sub>m</sub>	50					55											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 68$																
Max. permitted housing temperature		°C	+90																
		F	194																
Ambient temperature		°C	0 to +40																
		F	32 to 104																
Lubrication			Lubricated for life																
Direction of rotation			In- and output opposite direction																
Protection class			IP 65																
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00300AA - 040.000 - X																
Bore diameter of coupling on the application side		mm	X = 024.000 - 060.000																
Mass moment of inertia (relates to the drive)	G	24	$J_1$	kgcm <sup>2</sup>	-	-	-	-	-	4.21	3.85	3.28	3.17	2.78	2.73	2.48	2.46	2.43	2.42
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	-	-	-	-	-	3.73	3.41	2.9	2.81	2.46	2.42	2.19	2.18	2.15	2.14
Clamping hub diameter [mm]	K	38	$J_1$	kgcm <sup>2</sup>	25	19.1	16.3	14.1	12.8	11.1	10.7	10.2	10.1	9.69	9.64	9.39	9.37	9.34	9.33
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	22.13	16.9	14.43	12.48	11.33	9.82	9.47	9.03	8.94	8.58	8.53	8.31	8.29	8.27	8.26



Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).

- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

## 1-stage



up to 38<sup>4)</sup> (K<sup>5)</sup>  
clamping hub diameter

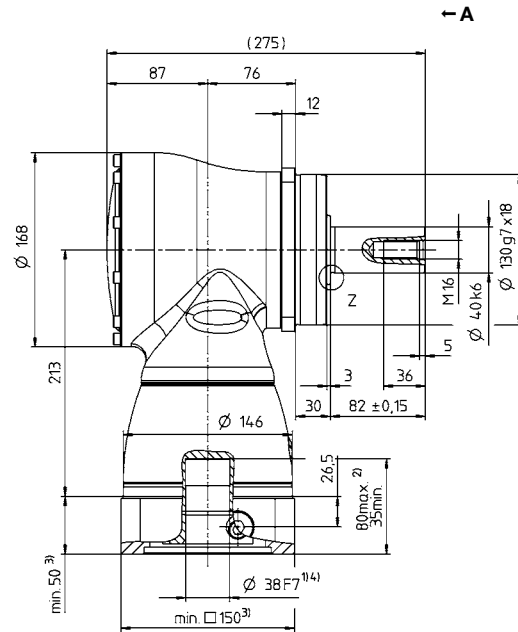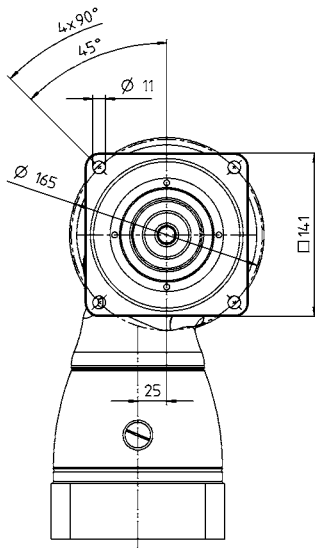

Motor shaft diameter [mm]

## 2-stage

up to 24/38<sup>4)</sup>  
(G<sup>5)</sup>/K) clamping  
hub diameter

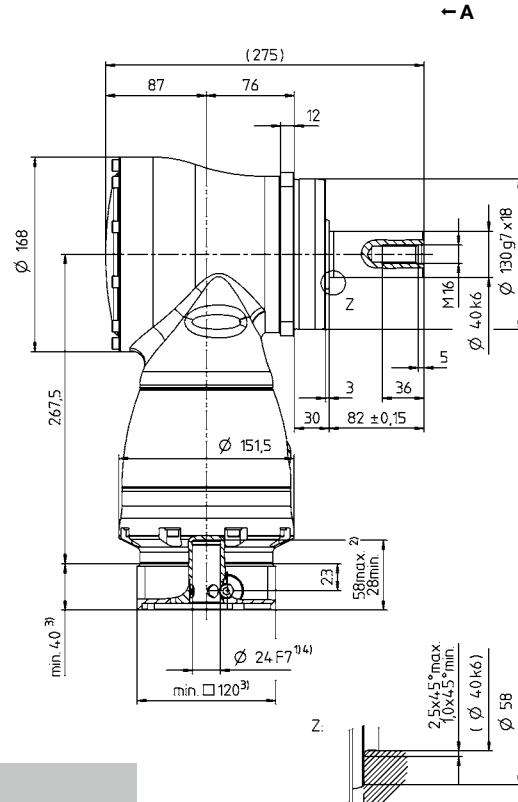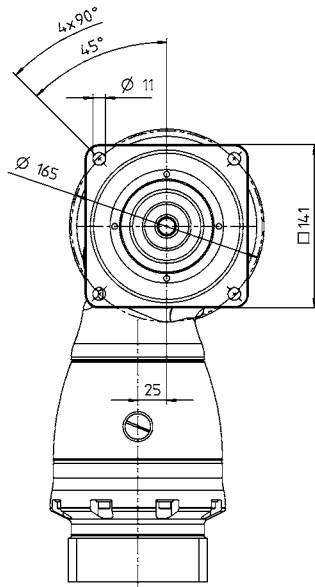


Hypoid gearboxes


SK\*

### Other output variants

Shaft with key



Spined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

<sup>1)</sup> Check motor shaft fit

<sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

<sup>3)</sup> The dimensions depend on the motor

<sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

<sup>5)</sup> Standard clamping hub diameter

# SK+ 180 MF 1-/2-stage

			1-stage					2-stage											
Ratio	<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	768	768	768	550	470	768	768	768	768	768	768	768	768	550	470		
		in.lb	6797	6797	6797	4868	4160	6797	6797	6797	6797	6797	6797	6797	6797	6797	4868	4160	
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	640	640	640	550	470	640	640	640	640	640	640	640	640	550	470		
		in.lb	5665	5665	5665	4868	4160	5665	5665	5665	5665	5665	5665	5665	5665	5665	4868	4160	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	400	400	400	380	360	400	400	400	400	400	400	400	400	380	360		
		in.lb	3540	3540	3540	3363	3186	3540	3540	3540	3540	3540	3540	3540	3540	3540	3363	3186	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	900	1050	1050	970	900	1050	1050	1050	1050	1050	1050	1050	1050	970	900		
		in.lb	7966	9293	9293	8585	7966	9293	9293	9293	9293	9293	9293	9293	9293	9293	8585	7966	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	1600	1800	2000	1800	1800	2700	2700	2700	2700	2700	2700	2700	2900	3200	3400		
Max. input speed	$n_{1Max}$	rpm	4500	4500	4500	4500	4500	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000		
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	19	16	14	17	14	3	2.3	1.8	1.6	1.3	1.2	0.9	0.9	0.9	0.9		
		in.lb	168	142	124	150	124	27	20	16	14	12	11	8.0	8.0	8.0	8.0		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$																
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	64	71	79	78	77	71	71	71	71	71	71	71	78	78	78		
		in.lb/arcmin	566	628	699	690	682	628	628	628	628	628	628	628	690	690	690		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	14200																
		lb <sub>f</sub>	3195																
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	14700																
		lb <sub>f</sub>	3308																
Max. tilting moment	$M_{2KMax}$	Nm	3213																
		in.lb	28438																
Efficiency at full load	$\eta$	%	96					94											
Service life	$L_h$	h	> 20000																
Weight (incl. standard adapter plate)	$m$	kg	45.4					48											
		lb <sub>m</sub>	100					106											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 68$																
		°C	+90																
Max. permitted housing temperature	$F$	°C	194																
		°C	0 to +40																
Ambient temperature	$F$	°C	32 to 104																
		°C	32 to 104																
Lubrication			Lubricated for life																
Direction of rotation			In- and output opposite direction																
Protection class			IP 65																
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00800AA - 055.000 - X																
Bore diameter of coupling on the application side		mm	X = 040.000 - 075.000																
Mass moment of inertia (relates to the drive)	K	38	$J_1$	kgcm <sup>2</sup>	-	-	-	-	-	15.3	14	12.3	12	10.9	10.7	10.1	10	9.95	9.91
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	-	-	-	-	-	13.54	12.39	10.89	10.62	9.65	9.47	8.94	8.85	8.81	8.77
Clamping hub diameter [mm]	M	48	$J_1$	kgcm <sup>2</sup>	73.3	51.6	42.1	34	29.7	30	28.7	27.1	26.7	25.6	25.4	24.8	24.7	24.7	24.6
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	64.87	45.67	37.26	30.09	26.28	26.55	25.4	23.98	23.63	22.66	22.48	21.95	21.86	21.86	21.77



Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).

- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A



# 1-stage

up to 48<sup>4)</sup> (M)<sup>5)</sup>  
clamping hub diameter

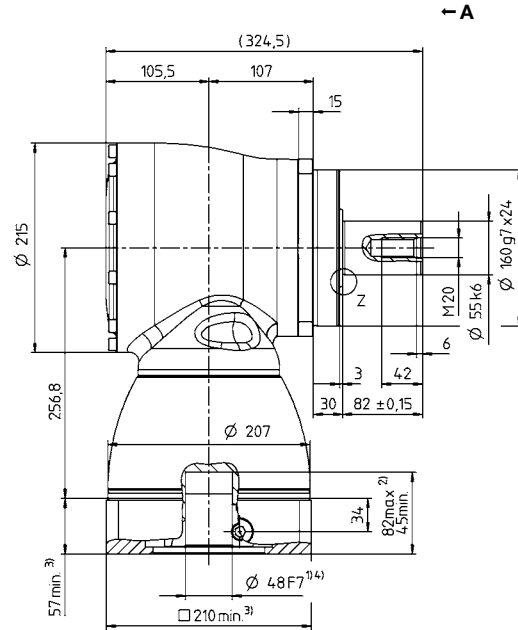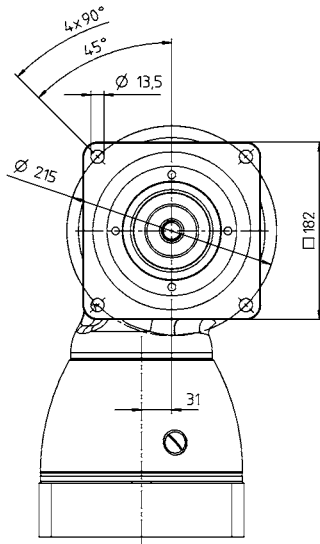

# 2-stage


up to 38/48<sup>4)</sup>  
(K<sup>5)</sup>/M) clamping  
hub diameter

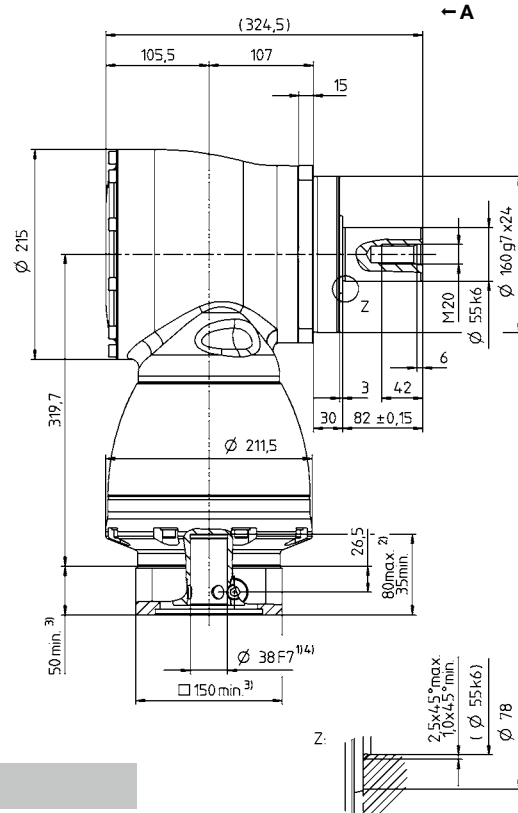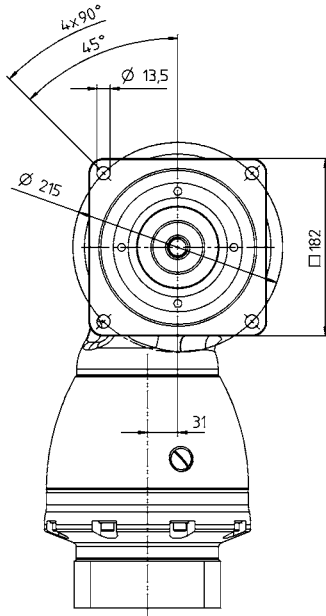


Motor shaft diameter [mm]

## Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter

# SPK+ 075 MF 2-stage

			2-stage											
Ratio	<i>i</i>		12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	144	144	176	176	176	176	80	100	140	152		
		in.lb	1275	1275	1558	1558	1558	1558	708	885	1239	1345		
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	120	120	132	132	132	132	80	100	132	114		
		in.lb	1062	1062	1168	1168	1168	1168	708	885	1168	1009		
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	75	75	75	75	75	75	60	75	75	52		
		in.lb	664	664	664	664	664	664	531	664	664	460		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	160	200	250	250	250	250	160	200	250	250		
		in.lb	1416	1770	2213	2213	2213	2213	1416	1770	2213	2213		
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2000	2400	2400	2700	2400	2500	2500	2500	2500	2500		
Max. input speed	$n_{1Max}$	rpm	7500	7500	7500	7500	7500	7500	7500	7500	7500	7500		
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	1.5	1.4	1.3	1.2	1.3	1.3	1.3	1.3	1.4	1.4		
		in.lb	13	12	12	11	12	12	12	12	12	12		
Max. backlash	$j_t$	arcmin	Standard ≤ 5 / Reduced ≤ 3											
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	10	10	10	10	10	10	10	10	10	10		
		in.lb/arcmin	89	89	89	89	89	89	89	89	89	89		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	3350											
		lb <sub>f</sub>	754											
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	4000											
		lb <sub>f</sub>	900											
Max. tilting moment	$M_{2KMax}$	Nm	236											
		in.lb	2089											
Efficiency at full load	$\eta$	%	94											
Service life	$L_h$	h	> 20000											
Weight (incl. standard adapter plate)	$m$	kg	5.2											
		lb <sub>m</sub>	11											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 66											
		°C	+90											
Max. permitted housing temperature		F	194											
		°C	0 to +40											
Ambient temperature		F	32 to 104											
Lubrication			Lubricated for life											
Direction of rotation			In- and output opposite direction											
Protection class			IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00150AA - 022.000 - X											
		Bore diameter of coupling on the application side	mm	X = 019.000 - 042.000										
Mass moment of inertia (relates to the drive)	C	14	$J_1$	kgcm <sup>2</sup>	0.54	0.45	0.44	0.4	0.44	0.36	0.35	0.34	0.34	0.34
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.48	0.4	0.39	0.35	0.39	0.32	0.31	0.3	0.3	0.3
Clamping hub diameter [mm]	E	19	$J_1$	kgcm <sup>2</sup>	0.89	0.8	0.79	0.75	0.79	0.71	0.7	0.7	0.7	0.69
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.79	0.71	0.7	0.66	0.7	0.63	0.62	0.62	0.62	0.61

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

2-stage

up to 14/19<sup>4)</sup>  
(C<sup>5)</sup>/E) clamping  
hub diameter

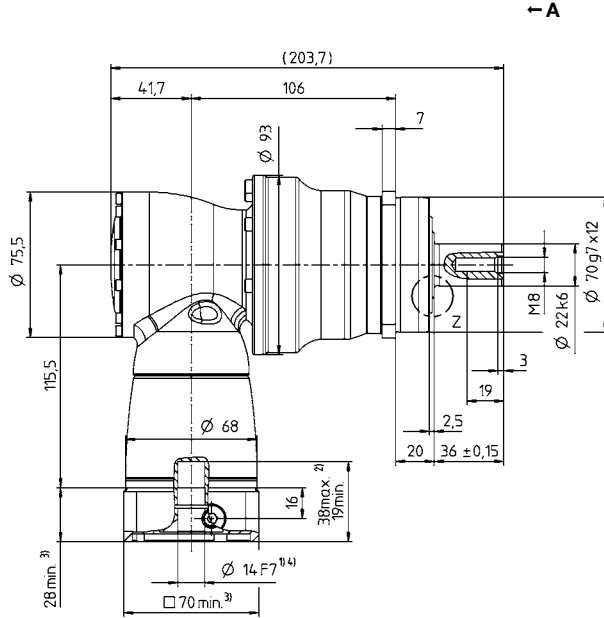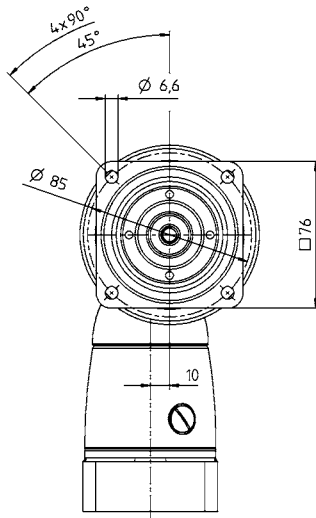


← A

Hypoid gearboxes


SPK

Other output variants



Shaft with key



Spined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- Non-tolerated dimensions are nominal dimensions
- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter

# SPK+ 075 MF 3-stage

			3-stage														
Ratio	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	144	144	176	176	176	176	176	176	176	176	80	100	140	152	
		in.lb	1275	1275	1558	1558	1558	1558	1558	1558	1558	1558	1558	708	885	1239	1345
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	120	120	132	132	132	132	132	132	132	132	80	100	132	114	
		in.lb	1062	1062	1168	1168	1168	1168	1168	1168	1168	1168	1168	708	885	1168	1009
Nominal torque (at $n_N$ )	$T_{2N}$	Nm	75	75	75	75	75	75	75	75	75	75	60	75	75	52	
		in.lb	664	664	664	664	664	664	664	664	664	664	664	531	664	664	460
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	200	160	250	250	250	250	250	250	250	250	160	200	250	250	
		in.lb	1770	1416	2213	2213	2213	2213	2213	2213	2213	2213	1416	1770	2213	2213	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	4400	4400	4400	4400	4400	4400	4400	4800	4400	4800	5500	5500	5500	5500	
Max. input speed	$n_{1Max}$	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	0.45	0.45	0.45	0.45	0.45	0.45	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
		in.lb	4.0	4.0	4.0	4.0	4.0	4.0	4.0	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
Max. backlash	$j_t$	arcmin	Standard $\leq 5$ / Reduced $\leq 3$														
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
		in.lb/arcmin	89	89	89	89	89	89	89	89	89	89	89	89	89	89	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	3350														
		lb <sub>f</sub>	754														
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	4000														
		lb <sub>f</sub>	900														
Max. tilting moment	$M_{2KMax}$	Nm	236														
		in.lb	2089														
Efficiency at full load	$\eta$	%	92														
Service life	$L_h$	h	> 20000														
Weight (incl. standard adapter plate)	<i>m</i>	kg	5.5														
		lb <sub>m</sub>	12														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 66$														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output opposite direction														
Protection class			IP 65														
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00150AA - 022.000 - X														
Bore diameter of coupling on the application side		mm	X = 019.000 - 042.000														
Mass moment of inertia (relates to the drive)	B	11	$J_1$	kgcm <sup>2</sup>	0.09	0.07	0.08	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.08	0.06	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Clamping hub diameter [mm]	C	14	$J_1$	kgcm <sup>2</sup>	0.2	0.18	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.18	0.16	0.17	0.17	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).


- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

3-stage

up to 11/14<sup>4)</sup>  
(B<sup>5)</sup>/C) clamping  
hub diameter

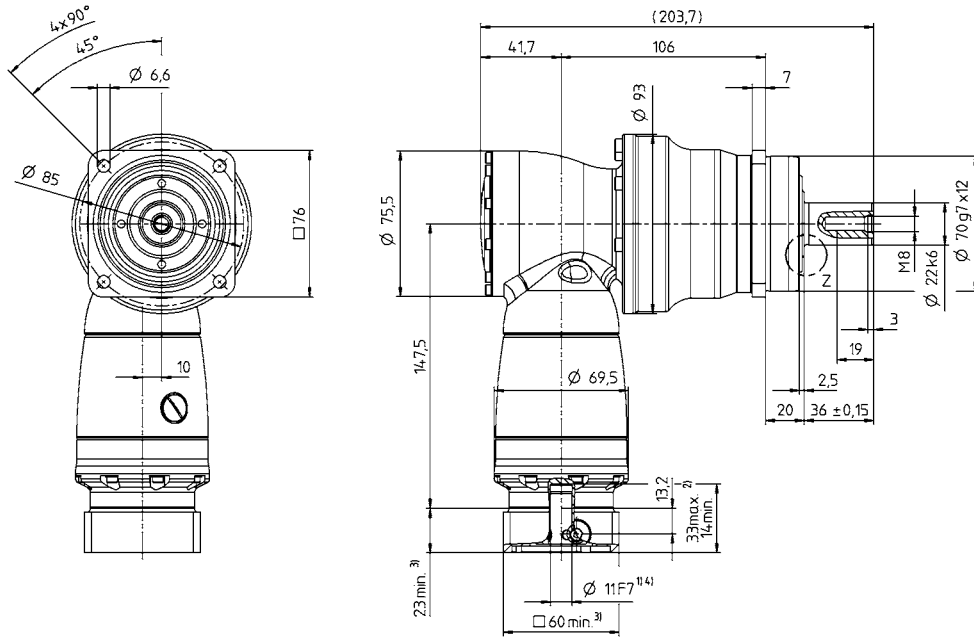


Hypoid gearboxes


SPK

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- Non-tolerated dimensions are nominal dimensions
- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter



# SPK+ 100 MF 2-stage

			2-stage										
Ratio	<i>i</i>		12	16	20	25	28	35	40	50	70	100	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	336	336	420	420	428	428	200	250	350	376	
		in.lb	2974	2974	3717	3717	3788	3788	1770	2213	3098	3328	
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	280	280	350	350	378	378	200	250	350	282	
		in.lb	2478	2478	3098	3098	3346	3346	1770	2213	3098	2496	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	180	180	175	175	170	170	160	175	170	120	
		in.lb	1593	1593	1549	1549	1505	1505	1416	1549	1505	1062	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	380	460	575	575	625	625	400	500	625	625	
		in.lb	3363	4071	5089	5089	5532	5532	3540	4425	5532	5532	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2000	2400	2400	2700	2400	2500	2500	2500	2500	2500	
Max. input speed	$n_{1Max}$	rpm	7500	7500	7500	7500	7500	7500	7500	7500	7500	7500	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	2	2.2	2.1	2.1	2.1	2.1	2	2	2	2	
		in.lb	18	19	19	19	19	19	18	18	18	18	
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$										
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	31	31	31	31	31	31	31	31	31	31	
		in.lb/arcmin	274	274	274	274	274	274	274	274	274	274	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	5650										
		lb <sub>f</sub>	1271										
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	6300										
		lb <sub>f</sub>	1418										
Max. tilting moment	$M_{2KMax}$	Nm	487										
		in.lb	4310										
Efficiency at full load	$\eta$	%	94										
Service life	$L_h$	h	> 20000										
Weight (incl. standard adapter plate)	$m$	kg	9.7										
		lb <sub>m</sub>	21										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 68$										
		°C	+90										
Max. permitted housing temperature		F	194										
		°C	0 to +40										
Ambient temperature		F	32 to 104										
Lubrication			Lubricated for life										
Direction of rotation			In- and output opposite direction										
Protection class			IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00300AA - 032.000 - X										
		Bore diameter of coupling on the application side	mm	X = 024.000 - 060.000									
Mass moment of inertia (relates to the drive)	E	19	$J_1$	kgcm <sup>2</sup>	1.48	1.2	1.17	1.05	1.15	0.95	0.9	0.89	0.89
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	1.31	1.06	1.04	0.93	1.02	0.84	0.8	0.79	0.79
Clamping hub diameter [mm]	H	28	$J_1$	kgcm <sup>2</sup>	2.89	2.62	2.59	2.46	2.56	2.36	2.31	2.31	2.3
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	2.56	2.32	2.29	2.18	2.27	2.09	2.04	2.04	2.04

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

2-stage

up to 19/28<sup>4)</sup>  
(E<sup>5)</sup>/H) clamping  
hub diameter

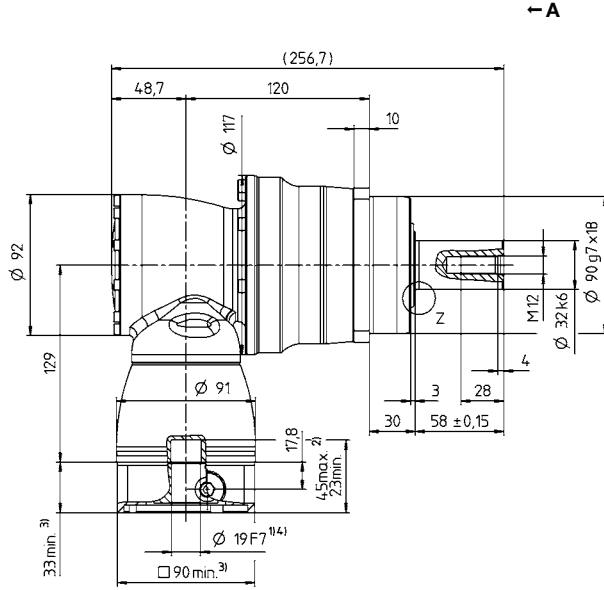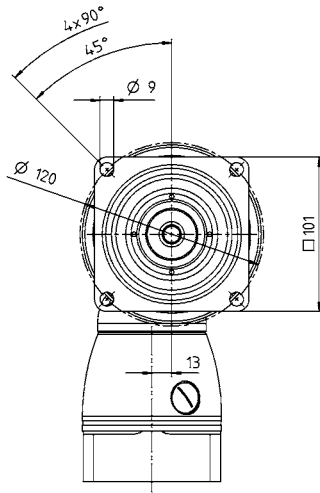


← A

Hypoid gearboxes


SPK

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter

# SPK+ 100 MF 3-stage

			3-stage														
Ratio	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	336	336	420	420	420	420	420	420	428	428	200	250	350	376	
		in.lb	2974	2974	3717	3717	3717	3717	3717	3717	3788	3788	1770	2213	3098	3328	
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	280	280	350	350	350	350	350	350	378	378	200	250	350	282	
		in.lb	2478	2478	3098	3098	3098	3098	3098	3098	3346	3346	1770	2213	3098	2496	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	180	180	175	175	175	175	175	175	170	170	160	175	170	120	
		in.lb	1593	1593	1549	1549	1549	1549	1549	1549	1505	1505	1416	1549	1505	1062	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	460	380	575	575	575	575	575	575	625	625	400	500	625	625	
		in.lb	4071	3363	5089	5089	5089	5089	5089	5089	5532	5532	3540	4425	5532	5532	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	3500	3500	3500	3500	3500	3500	3500	3800	3500	3800	4500	4500	4500	4500	
Max. input speed	$n_{1Max}$	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	0.6	0.45	0.45	0.45	0.45	0.45	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
		in.lb	5.3	4.0	4.0	4.0	4.0	4.0	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$														
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	31	31	31	31	31	31	31	31	31	31	31	31	31	31	
		in.lb/arcmin	274	274	274	274	274	274	274	274	274	274	274	274	274	274	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	5650														
		lb <sub>f</sub>	1271														
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	6300														
		lb <sub>f</sub>	1418														
Max. tilting moment	$M_{2KMax}$	Nm	487														
		in.lb	4310														
Efficiency at full load	$\eta$	%	92														
Service life	$L_h$	h	> 20000														
Weight (incl. standard adapter plate)	<i>m</i>	kg	10.3														
		lb <sub>m</sub>	23														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 68$														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output opposite direction														
Protection class			IP 65														
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00300AA - 032.000 - X														
Bore diameter of coupling on the application side		mm	X = 024.000 - 060.000														
Mass moment of inertia (relates to the drive)	C	14	$J_1$	kgcm <sup>2</sup>	0.28	0.23	0.24	0.23	0.21	0.2	0.19	0.18	0.19	0.18	0.18	0.18	0.18
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.25	0.2	0.21	0.2	0.19	0.18	0.17	0.16	0.17	0.16	0.16	0.16	0.16
Clamping hub diameter [mm]	E	19	$J_1$	kgcm <sup>2</sup>	0.72	0.63	0.68	0.68	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.64	0.56	0.6	0.6	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

3-stage

up to 14/19<sup>4)</sup>  
(C<sup>5)</sup>/E) clamping  
hub diameter

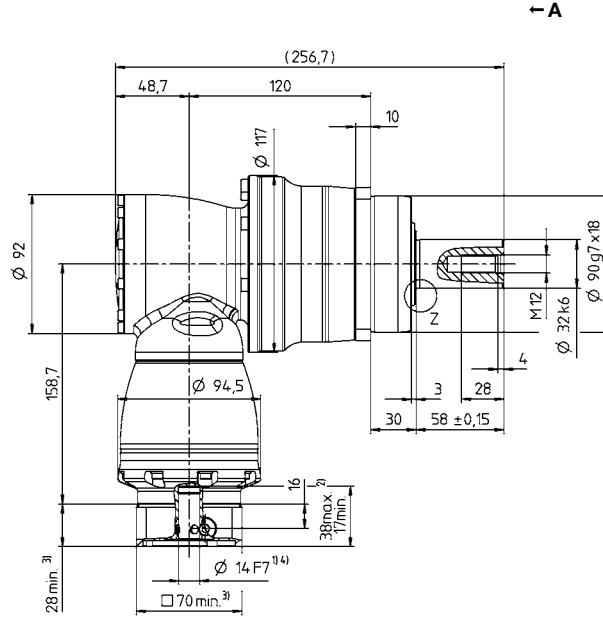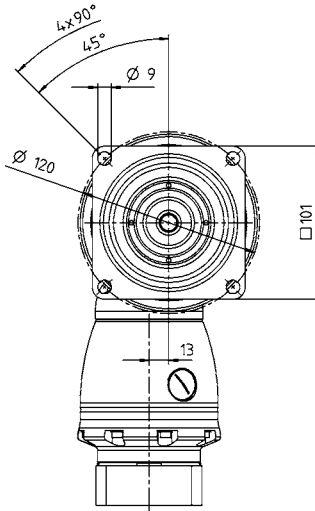


← A

Hypoid gearboxes


SPK

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter

# SPK+ 140 MF 2-stage

			2-stage											
Ratio	<i>i</i>		12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	816	816	1020	1020	825	825	500	625	625	720		
		in.lb	7222	7222	9028	9028	7302	7302	4425	5532	5532	6373		
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	680	680	792	792	792	792	500	625	792	636		
		in.lb	6019	6019	7010	7010	7010	7010	4425	5532	7010	5629		
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	360	360	360	360	360	360	320	360	360	220		
		in.lb	3186	3186	3186	3186	3186	3186	2832	3186	3186	1947		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	880	1040	1300	1300	1350	1350	1000	1250	1350	1250		
		in.lb	7789	9205	11506	11506	11949	11949	8851	11064	11949	11064		
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	1900	2300	2300	2600	2300	2300	2300	2300	2300	2300		
Max. input speed	$n_{1Max}$	rpm	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500		
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	3.5	4.7	3.3	3.3	3.6	3.6	3.1	3.1	3.1	3.1		
		in.lb	31	42	29	29	32	32	27	27	27	27		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$											
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	53	53	53	53	53	53	53	53	53	53		
		in.lb/arcmin	469	469	469	469	469	469	469	469	469	469		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	9870											
		lb <sub>f</sub>	2221											
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	9450											
		lb <sub>f</sub>	2126											
Max. tilting moment	$M_{2KMax}$	Nm	952											
		in.lb	8426											
Efficiency at full load	$\eta$	%	94											
Service life	$L_h$	h	> 20000											
Weight (incl. standard adapter plate)	$m$	kg	20											
		lb <sub>m</sub>	44											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 68$											
Max. permitted housing temperature		°C	+90											
		F	194											
Ambient temperature		°C	0 to +40											
		F	32 to 104											
Lubrication			Lubricated for life											
Direction of rotation			In- and output opposite direction											
Protection class			IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00800AA - 040.000 - X											
Bore diameter of coupling on the application side		mm	X = 040.000 - 075.000											
Mass moment of inertia (relates to the drive)	H	28	$J_1$	kgcm <sup>2</sup>	4.68	3.82	3.75	3.31	3.68	2.97	2.8	2.79	2.78	2.77
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	4.14	3.38	3.32	2.93	3.26	2.63	2.48	2.47	2.46	2.45
Clamping hub diameter [mm]	K	38	$J_1$	kgcm <sup>2</sup>	11.8	11	10.9	10.5	10.9	10.1	9.96	9.95	9.94	9.94
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	10.44	9.74	9.65	9.29	9.65	8.94	8.81	8.81	8.8	8.8

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

2-stage

up to 28/38<sup>4)</sup>  
(H<sup>5)</sup>/K) clamping  
hub diameter

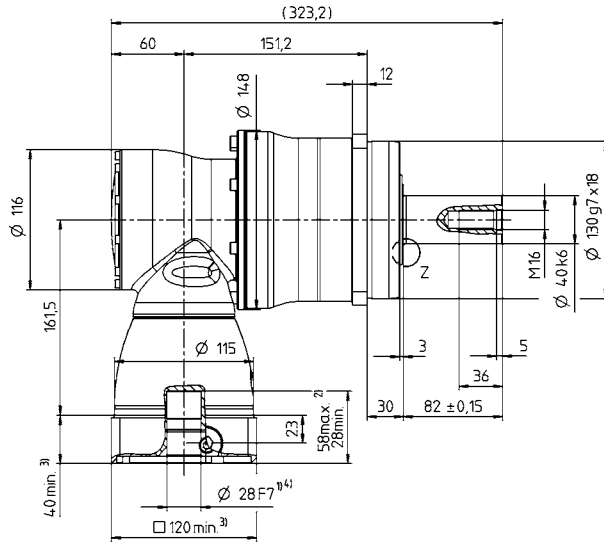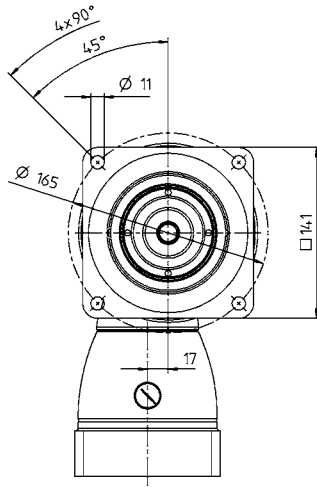


← A

Hypoid gearboxes


SPK

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter

# SPK+ 140 MF 3-stage

			3-stage														
Ratio	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	816	816	1020	1020	1020	1020	1020	1020	825	825	500	625	825	720	
		in.lb	7222	7222	9028	9028	9028	9028	9028	9028	9028	7302	7302	4425	5532	7302	6373
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	680	680	792	792	792	792	792	792	792	792	500	625	792	636	
		in.lb	6019	6019	7010	7010	7010	7010	7010	7010	7010	7010	7010	4425	5532	7010	5629
Nominal torque (at $n_N$ )	$T_{2N}$	Nm	360	360	360	360	360	360	360	360	360	360	320	360	360	220	
		in.lb	3186	3186	3186	3186	3186	3186	3186	3186	3186	3186	3186	2832	3186	3186	1947
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	1040	880	1300	1300	1300	1300	1300	1300	1300	1350	1350	1000	1250	1350	1250
		in.lb	9205	7789	11506	11506	11506	11506	11506	11506	11506	11949	11949	8851	11064	11949	11064
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	3100	3100	3100	3100	3100	3100	3100	3500	3100	3500	4200	4200	4200	4200	
Max. input speed	$n_{1Max}$	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	1.1	0.9	0.9	0.75	0.75	0.6	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
		in.lb	9.7	8.0	8.0	6.6	6.6	5.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$														
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	53	53	53	53	53	53	53	53	53	53	53	53	53	53	
		in.lb/arcmin	469	469	469	469	469	469	469	469	469	469	469	469	469	469	469
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	9870														
		lb <sub>f</sub>	2221														
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	9450														
		lb <sub>f</sub>	2126														
Max. tilting moment	$M_{2KMax}$	Nm	952														
		in.lb	8426														
Efficiency at full load	$\eta$	%	92														
Service life	$L_h$	h	> 20000														
Weight (incl. standard adapter plate)	$m$	kg	20.7														
		lb <sub>m</sub>	46														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 68$														
		°C	+90														
Max. permitted housing temperature	$F$	°C	194														
		°C	0 to +40														
Ambient temperature	$F$	°C	32 to 104														
		°C	32 to 104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output opposite direction														
Protection class			IP 65														
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 00800AA - 040.000 - X														
		Bore diameter of coupling on the application side	mm	X = 040.000 - 075.000													
Mass moment of inertia (relates to the drive)	E 19	$J_1$	kgcm <sup>2</sup>	1.01	0.76	0.88	0.85	0.76	0.75	0.7	0.69	0.7	0.69	0.69	0.69	0.69	0.69
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.89	0.67	0.78	0.75	0.67	0.66	0.62	0.61	0.62	0.61	0.61	0.61	0.61	0.61
Clamping hub diameter [mm]	G 24	$J_1$	kgcm <sup>2</sup>	2.57	2.32	2.44	2.42	2.32	2.31	2.26	2.25	2.26	2.25	2.25	2.25	2.25	2.25
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	2.27	2.05	2.16	2.14	2.05	2.04	2	1.99	2	1.99	1.99	1.99	1.99	1.99

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

3-stage

up to 19/24<sup>4)</sup>  
(E<sup>5)</sup>/G) clamping  
hub diameter

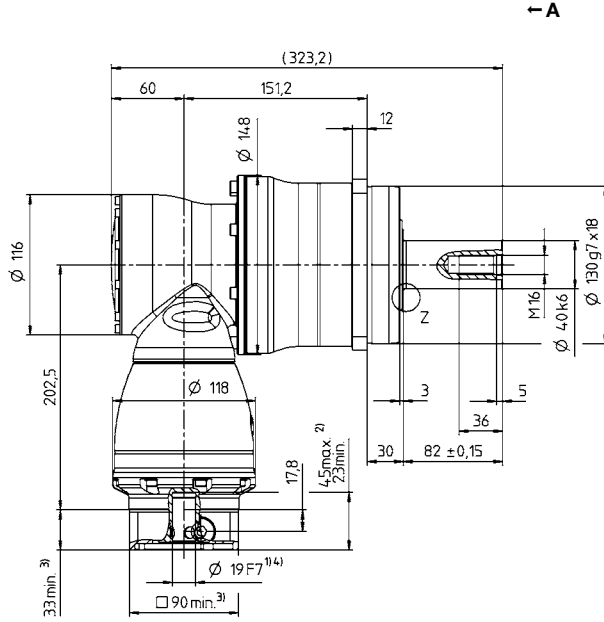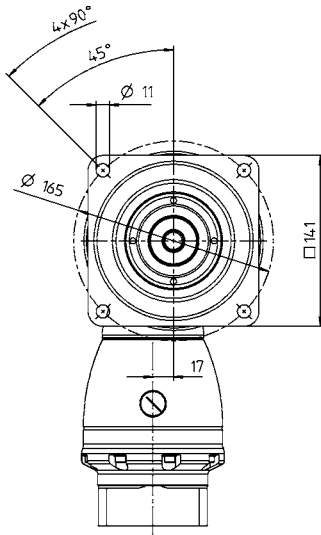


← A

Hypoid gearboxes


SPK

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- Non-tolerated dimensions are nominal dimensions
- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter



# SPK+ 180 MF 2-stage

			2-stage											
Ratio	$i$		12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	1440	1440	1800	1800	1936	1936	840	1050	1470	1552		
		in.lb	12745	12745	15931	15931	17135	17135	7435	9293	13011	13736		
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	1200	1200	1452	1452	1452	1452	840	1050	1452	1164		
		in.lb	10621	10621	12851	12851	12851	12851	7435	9293	12851	10302		
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	750	750	750	750	750	750	640	750	750	750		
		in.lb	6638	6638	6638	6638	6638	6638	5665	6638	6638	6638		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	1600	2000	2500	2500	2750	2750	1600	2000	2750	2750		
		in.lb	14161	17702	22127	22127	24340	24340	14161	17702	24340	24340		
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	1600	1900	1900	2100	1900	2100	2100	2100	2100	2100		
Max. input speed	$n_{1Max}$	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000		
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	11	9.2	9.2	7	8.5	10	7.5	7.5	7	7		
		in.lb	97	81	81	62	75	89	66	66	62	62		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$											
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	175	175	175	175	175	175	175	175	175	175		
		in.lb/arcmin	1549	1549	1549	1549	1549	1549	1549	1549	1549	1549		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	15570											
		lb <sub>f</sub>	3503											
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	15400											
		lb <sub>f</sub>	3465											
Max. tilting moment	$M_{2KMax}$	Nm	1600											
		in.lb	14161											
Efficiency at full load	$\eta$	%	94											
Service life	$L_h$	h	> 20000											
Weight (incl. standard adapter plate)	$m$	kg	45											
		lb <sub>m</sub>	99											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 70$											
Max. permitted housing temperature		°C	+90											
		F	194											
Ambient temperature		°C	0 to +40											
		F	32 to 104											
Lubrication			Lubricated for life											
Direction of rotation			In- and output opposite direction											
Protection class			IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 01500AA - 055.000 - X											
Bore diameter of coupling on the application side		mm	X = 050.000 - 080.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	K	38	$J_1$	kgcm <sup>2</sup>	24.7	19.5	19	16.3	18.6	14	12.9	12.8	12.7	12.7
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	21.86	17.26	16.82	14.43	16.46	12.39	11.42	11.33	11.24	11.24

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

2-stage

up to 38<sup>4)</sup> (K)<sup>5)</sup>  
clamping hub diameter

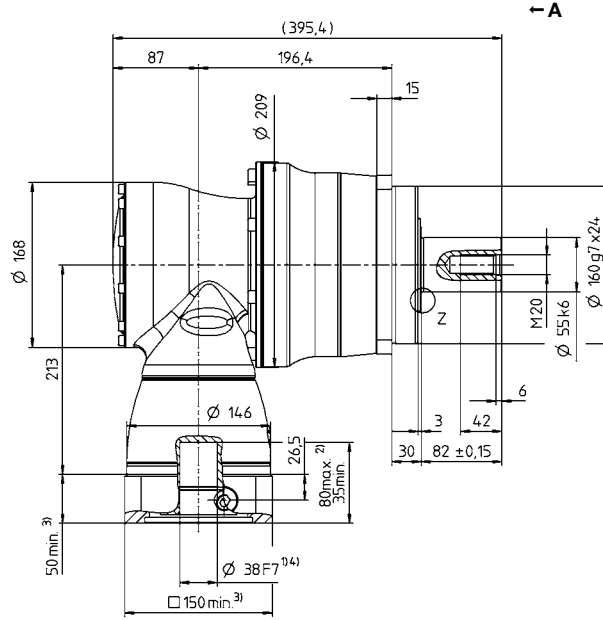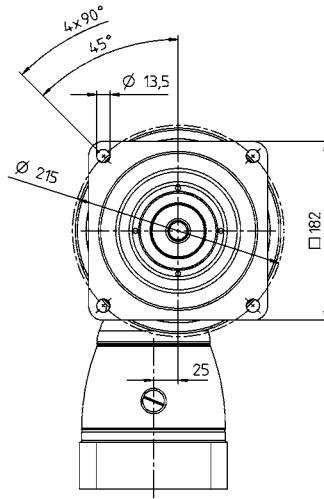


Hypoid gearboxes


SPK

Other output variants



Shaft with key



Spined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter

# SPK+ 180 MF 3-stage

				3-stage														
Ratio	<i>i</i>			64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	<i>Nm</i>		1440	1440	1800	1800	1800	1800	1800	1800	1936	1936	840	1050	1470	1552	
		<i>in.lb</i>		12745	12745	15931	15931	15931	15931	15931	15931	15931	17135	17135	7435	9293	13011	13736
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	<i>Nm</i>		1200	1200	1452	1452	1452	1452	1452	1452	1452	1452	840	1050	1452	1164	
		<i>in.lb</i>		10621	10621	12851	12851	12851	12851	12851	12851	12851	12851	12851	7435	9293	12851	10302
Nominal torque (at $n_n$ )	$T_{2N}$	<i>Nm</i>		750	750	750	750	750	750	750	750	750	750	640	750	750	750	
		<i>in.lb</i>		6638	6638	6638	6638	6638	6638	6638	6638	6638	6638	6638	5665	6638	6638	6638
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	<i>Nm</i>		2000	1600	2500	2500	2500	2500	2500	2500	2500	2750	2750	1600	2000	2750	2750
		<i>in.lb</i>		17702	14161	22127	22127	22127	22127	22127	22127	22127	22127	24340	24340	14161	17702	24340
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$		2900	2900	2900	2900	2900	2900	2900	3200	2900	3200	3900	3900	3900	3900	
Max. input speed	$n_{1Max}$	<i>rpm</i>		4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Mean no load running torque <sup>b)</sup> (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	<i>Nm</i>		2	1	1.6	1.2	1.2	1	1	0.8	1	0.8	0.8	0.8	0.8	0.8	
		<i>in.lb</i>		18	8.9	14	11	11	8.9	8.9	7.1	8.9	7.1	7.1	7.1	7.1	7.1	7.1
Max. backlash	$j_t$	<i>arcmin</i>		Standard $\leq 4$ / Reduced $\leq 2$														
Torsional rigidity <sup>b)</sup>	$C_{t21}$	<i>Nm/arcmin</i>		175	175	175	175	175	175	175	175	175	175	175	175	175	175	
		<i>in.lb/arcmin</i>		1549	1549	1549	1549	1549	1549	1549	1549	1549	1549	1549	1549	1549	1549	1549
Max. axial force <sup>c)</sup>	$F_{2AMax}$	<i>N</i>		15570														
		<i>lb<sub>f</sub></i>		3503														
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	<i>N</i>		15400														
		<i>lb<sub>f</sub></i>		3465														
Max. tilting moment	$M_{2KMax}$	<i>Nm</i>		1600														
		<i>in.lb</i>		14161														
Efficiency at full load	$\eta$	%		92														
Service life	$L_h$	<i>h</i>		> 20000														
Weight (incl. standard adapter plate)	<i>m</i>	<i>kg</i>		47.4														
		<i>lb<sub>m</sub></i>		105														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	<i>dB(A)</i>		$\leq 70$														
Max. permitted housing temperature		°C		+90														
		<i>F</i>		194														
Ambient temperature		°C		0 to +40														
		<i>F</i>		32 to 104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output opposite direction														
Protection class				IP 65														
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )				BC2 - 01500AA - 055.000 - X														
Bore diameter of coupling on the application side		<i>mm</i>		X = 050.000 - 080.000														
Mass moment of inertia (relates to the drive)	G 24	$J_1$	<i>kgcm<sup>2</sup></i>	3.97	2.82	3.36	3.22	2.82	2.75	2.5	2.47	2.5	2.44	2.42	2.42	2.42	2.42	
			<i>10<sup>-3</sup> in.lb.s<sup>2</sup></i>	3.51	2.5	2.97	2.85	2.5	2.43	2.21	2.19	2.21	2.16	2.14	2.14	2.14	2.14	
Clamping hub diameter [mm]	K 38	$J_1$	<i>kgcm<sup>2</sup></i>	10.9	9.74	10.3	10.1	9.74	9.66	9.41	9.38	9.41	9.38	9.33	9.33	9.33	9.33	
			<i>10<sup>-3</sup> in.lb.s<sup>2</sup></i>	9.65	8.62	9.12	8.94	8.62	8.55	8.33	8.3	8.33	8.3	8.26	8.26	8.26	8.26	

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

3-stage

up to 24 / 38<sup>4)</sup>  
(G<sup>5)</sup> / K) clamping  
hub diameter

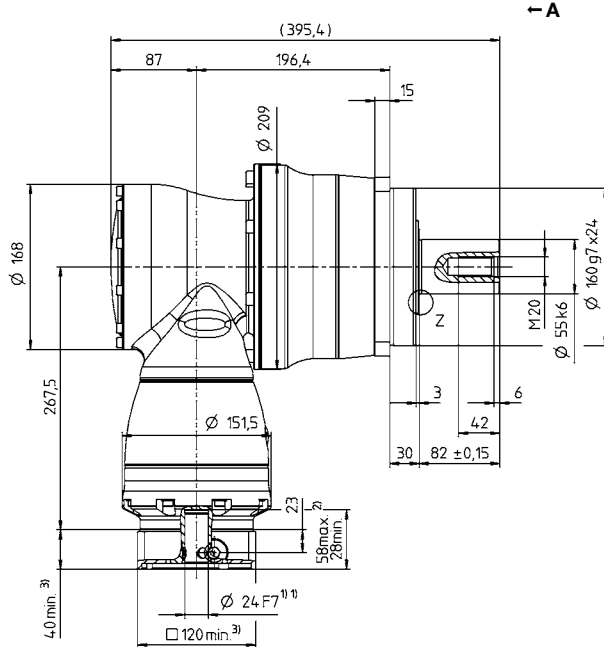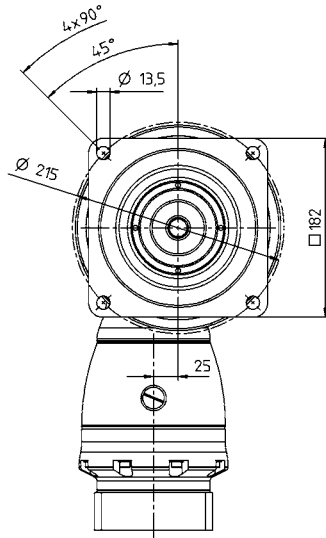


Hypoid gearboxes


SPK

Other output variants



Shaft with key



Spined shaft (DIN 5480)



Shaft mounted



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
<sup>1)</sup> Check motor shaft fit  
<sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

<sup>3)</sup> The dimensions depend on the motor  
<sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm  
<sup>5)</sup> Standard clamping hub diameter

# SPK+ 210 MF 2-stage

			2-stage											
Ratio	<i>i</i>		12	16	20	25	28	35	40	50	70	100		
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	3072	3072	3840	3840	3840	3840	1880	2350	3290	2800		
		in.lb	27190	27190	33987	33987	33987	33987	16640	20799	29119	24782		
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	2560	2560	3000	3000	2880	2880	1880	2350	2880	2280		
		in.lb	22658	22658	26552	26552	25490	25490	16640	20799	25490	20180		
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	1500	1500	1500	1500	1400	1500	1400	1500	1400	1000		
		in.lb	13276	13276	13276	13276	12391	13276	12391	13276	12391	8851		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	3600	4200	5250	5250	5900	5900	3600	4500	5900	5900		
		in.lb	31863	37173	46467	46467	52220	52220	31863	39829	52220	52220		
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	1500	1700	1700	1900	1700	1900	1700	1700	1700	1700		
Max. input speed	$n_{1Max}$	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	21	19	17	16	15	15	16	16	15	14		
		in.lb	186	168	150	142	133	133	142	142	133	124		
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$											
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	300	300	300	300	300	300	300	300	300	300		
		in.lb/arcmin	2655	2655	2655	2655	2655	2655	2655	2655	2655	2655		
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	30000											
		lb <sub>f</sub>	6750											
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	21000											
		lb <sub>f</sub>	4725											
Max. tilting moment	$M_{2KMax}$	Nm	3100											
		in.lb	27437											
Efficiency at full load	$\eta$	%	94											
Service life	$L_h$	h	> 20000											
Weight (incl. standard adapter plate)	$m$	kg	82											
		lb <sub>m</sub>	181											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 71$											
Max. permitted housing temperature		°C	+90											
		F	194											
Ambient temperature		°C	0 to +40											
		F	32 to 104											
Lubrication			Lubricated for life											
Direction of rotation			In- and output opposite direction											
Protection class			IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 04000AA - 075.000 - X											
		Bore diameter of coupling on the application side	mm	X = 050.000 - 090.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	M	48	$J_1$	kgcm <sup>2</sup>	78.8	54.6	53	43.4	51.5	42.2	30.2	30	29.8	29.8
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	69.74	48.32	46.91	38.41	45.58	37.35	26.73	26.55	26.37	26.37

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).

<sup>a)</sup> At max. 10 %  $F_{2QMax}$

<sup>b)</sup> Valid for standard clamping hub diameter

<sup>c)</sup> Refers to center of the output shaft or flange

<sup>d)</sup> Please reduce input speed at higher ambient temperatures



<sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

2-stage

up to 48<sup>4)</sup> (M)<sup>5)</sup>  
clamping hub diameter

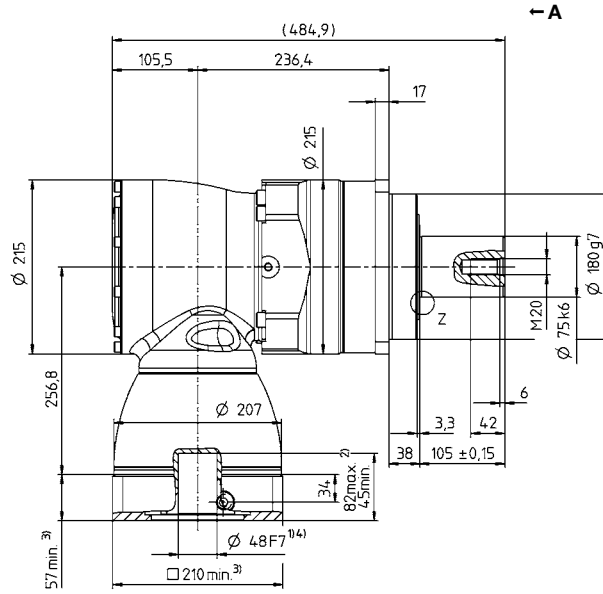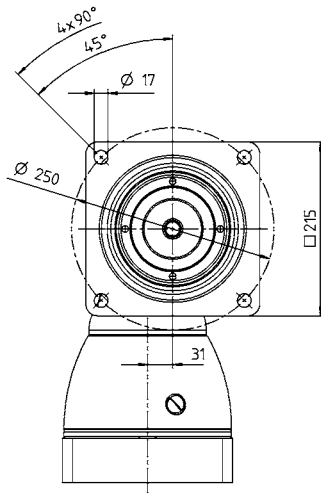


Hypoid gearboxes



SPK

Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
<sup>1)</sup> Check motor shaft fit

<sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

<sup>3)</sup> The dimensions depend on the motor

<sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

<sup>5)</sup> Standard clamping hub diameter

# SPK+ 210 MF 3-stage

			3-stage														
Ratio	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	3072	3072	3840	3840	3840	3840	3840	3840	3840	3840	1880	2350	3290	2800	
		in.lb	27190	27190	33987	33987	33987	33987	33987	33987	33987	33987	33987	16640	20799	29119	24782
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	2560	2560	3000	3000	3000	3000	3000	3000	2880	2880	1880	2350	2880	2280	
		in.lb	22658	22658	26552	26552	26552	26552	26552	26552	25490	25490	16640	20799	25490	20180	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	1500	1500	1500	1500	1500	1500	1500	1500	1400	1400	1500	1500	1400	1000	
		in.lb	13276	13276	13276	13276	13276	13276	13276	13276	12391	12391	13276	13276	12391	8851	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	4200	3600	5250	5250	5250	5250	5250	5250	5900	5900	3600	4500	5900	5900	
		in.lb	37173	31863	46467	46467	46467	46467	46467	46467	52220	52220	31863	39829	52220	52220	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2700	2700	2700	2700	2700	2700	2700	2900	2700	2900	3400	3400	3400	3400	
Max. input speed	$n_{1Max}$	rpm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	4.8	2.4	3.8	3.4	2.6	2.6	2	2	2	2	2	2	2	2	
		in.lb	42	21	34	30	23	23	18	18	18	18	18	18	18	18	
Max. backlash	$j_t$	arcmin	Standard $\leq 4$ / Reduced $\leq 2$														
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	300	300	300	300	300	300	300	300	300	300	300	300	300	300	
		in.lb/arcmin	2655	2655	2655	2655	2655	2655	2655	2655	2655	2655	2655	2655	2655	2655	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	30000														
		lb <sub>f</sub>	6750														
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	21000														
		lb <sub>f</sub>	4725														
Max. tilting moment	$M_{2KMax}$	Nm	3100														
		in.lb	27437														
Efficiency at full load	$\eta$	%	92														
Service life	$L_h$	h	> 20000														
Weight (incl. standard adapter plate)	<i>m</i>	kg	86														
		lb <sub>m</sub>	190														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 71$														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output opposite direction														
Protection class			IP 65														
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 04000AA - 075.000 - X														
Bore diameter of coupling on the application side		mm	X = 050.000 - 090.000														
Mass moment of inertia (relates to the drive)	K	38	$J_1$	kgcm <sup>2</sup>	14	10.9	12.3	12	10.9	10.7	10.1	10	10.1	10	9.9	9.9	9.9
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	12.39	9.65	10.89	10.62	9.65	9.47	8.94	8.85	8.94	8.85	8.76	8.76	8.76
Clamping hub diameter [mm]	M	48	$J_1$	kgcm <sup>2</sup>	28.7	25.6	27.1	26.7	26.7	25.6	24.8	24.7	24.8	24.7	24.6	24.6	24.6
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	25.4	22.66	23.98	23.63	23.63	22.66	21.95	21.86	21.95	21.86	21.77	21.77	21.77

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

3-stage

up to 38 / 48<sup>4)</sup>  
(K<sup>5)</sup> / M) clamping  
hub diameter

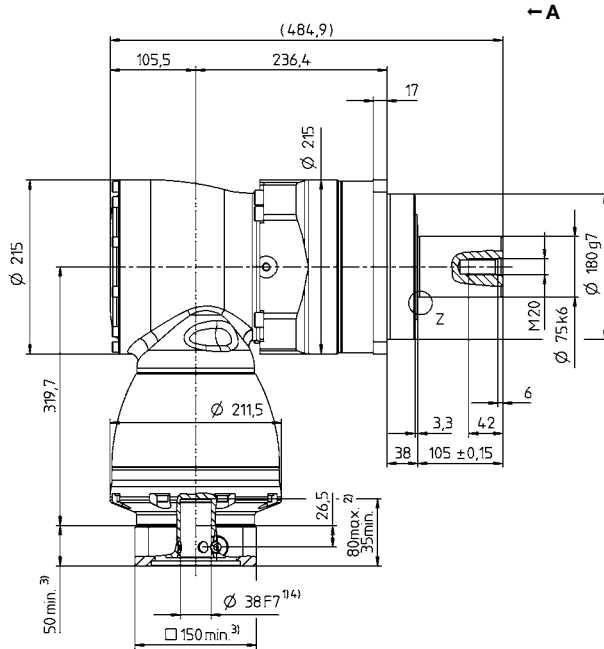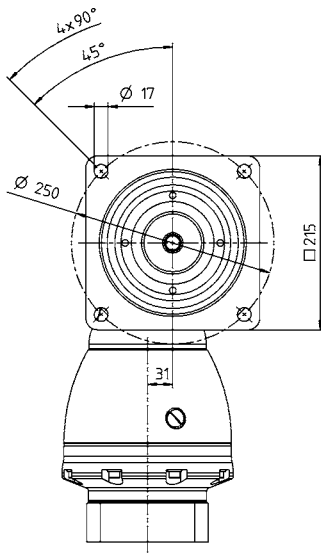


Hypoid gearboxes



SPK

Other output variants

Shaft with key



Spined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter



# SPK+ 240 MF 3-stage

			3-stage													
Ratio	<i>i</i>		48	64	100	125	140	175	200	250	280	350	400	500	700	1000
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	5446	5446	5446	5700	5000	5700	4200	5250	5446	5700	5446	5700	5700	3642
		in.lb	48201	48201	48201	50450	44254	50450	37173	46467	48201	50450	48201	50450	50450	32235
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	4800	4800	5400	5400	5000	5400	4200	5250	5400	5400	4400	5160	4730	3642
		in.lb	42484	42484	47794	47794	44254	47794	37173	46467	47794	47794	38944	45670	41864	32235
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2300	1700
		in.lb	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	20357	15046
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	6400	8000	8500	8500	8500	8500	8000	8500	8500	8500	8500	8500	8500	6850
		in.lb	56645	70806	75232	75232	75232	75232	70806	75232	75232	75232	75232	75232	75232	60628
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	1800	1900	1900	2100	1900	2100	2100	2100	2100	2100	2100	2100	2100	2100
Max. input speed	$n_{1Max}$	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque <sup>b)</sup> (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	13	9.6	8.4	8.4	9.6	9.6	8.4	7.2	7.2	7.2	6.9	6.9	6.9	6.9
		in.lb	115	85	74	74	85	85	74	64	64	64	61	61	61	61
Max. backlash	$j_t$	arcmin	Standard ≤ 5.5 / Reduced ≤ 3.5													
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	510	510	510	510	510	510	510	510	510	510	510	510	510	510
		in.lb/arcmin	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	33000													
		lb <sub>f</sub>	7425													
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	30000													
		lb <sub>f</sub>	6750													
Max. tilting moment	$M_{2KMax}$	Nm	5000													
		in.lb	44254													
Efficiency at full load	$\eta$	%	92													
Service life	$L_h$	h	> 20000													
Weight (incl. standard adapter plate)	<i>m</i>	kg	93													
		lb <sub>m</sub>	206													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 71													
Max. permitted housing temperature		°C	+90													
		F	194													
Ambient temperature		°C	0 to +40													
		F	32 to 104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output opposite direction													
Protection class			IP 65													
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 06000AA - 085.000 - X													
Bore diameter of coupling on the application side		mm	X = 060.000 - 140.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	K	38	$J_1$	kgcm <sup>2</sup>	26.5	20	17	17	15	15	13	13	13	13	13	13
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	23.45	17.7	15.05	15.05	13.28	13.28	11.51	11.51	11.51	11.51	11.51	11.51

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

3-stage

up to 38<sup>4)</sup> (K)<sup>5)</sup>  
clamping hub diameter

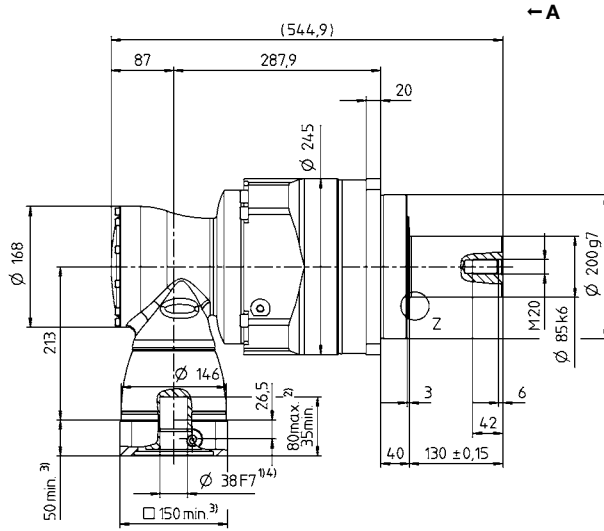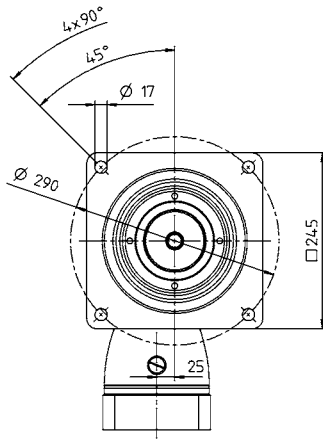


Hypoid gearboxes



SPK

Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions  
1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

5) Standard clamping hub diameter

# SPK+ 240 MF 4-stage i=144-1000

			4-stage													
Ratio	<i>i</i>		144	192	256	300	375	420	500	560	600	700	800	875	1000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	5446	5446	5446	5446	5700	5446	5446	5446	5446	5446	5446	5700	5446	
		in.lb	48201	48201	48201	48201	50450	48201	48201	48201	48201	48201	48201	48201	50450	48201
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	4800	4800	4800	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	
		in.lb	42484	42484	42484	47794	47794	47794	47794	47794	47794	47794	47794	47794	47794	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	
		in.lb	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	22127	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	6400	6400	8000	8000	8500	8000	8500	8500	8000	8500	8500	8500	8500	
		in.lb	56645	56645	70806	70806	75232	70806	75232	75232	70806	75232	75232	75232	75232	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2700	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	3200	
Max. input speed	$n_{1Max}$	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Mean no load running torque <sup>b)</sup> (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	4.8	3.5	2.4	2	1.1	1.4	1.4	1.2	1.1	1.1	0.9	0.9	0.75	
		in.lb	42	31	21	18	9.7	12	12	11	9.7	9.7	8.0	8.0	6.6	
Max. backlash	$j_t$	arcmin	Standard ≤ 5.5 / Reduced ≤ 3.5													
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	510	510	510	510	510	510	510	510	510	510	510	510	510	
		in.lb/arcmin	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	4514	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	33000													
		lb <sub>f</sub>	7425													
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	30000													
		lb <sub>f</sub>	6750													
Max. tilting moment	$M_{2KMax}$	Nm	5000													
		in.lb	44254													
Efficiency at full load	$\eta$	%	90													
Service life	$L_h$	h	> 20000													
Weight (incl. standard adapter plate)	$m$	kg	96													
		lb <sub>m</sub>	212													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 71													
		°C	+90													
Max. permitted housing temperature	$F$	°C	194													
		°C	0 to +40													
Ambient temperature	$F$	°C	32 to 104													
		°C	32 to 104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output opposite direction													
Protection class			IP 65													
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 06000AA - 085.000 - X													
Bore diameter of coupling on the application side		mm	X = 060.000 - 140.000													
Mass moment of inertia (relates to the drive)	G 24	$J_1$	kgcm <sup>2</sup>	5.96	4.3	3.9	3.32	3.31	2.8	3.18	2.8	2.49	2.73	2.49	2.73	2.46
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	5.27	3.81	3.45	2.94	2.93	2.48	2.81	2.48	2.2	2.42	2.2	2.42	2.18
Clamping hub diameter [mm]	K 38	$J_1$	kgcm <sup>2</sup>	12.87	11.19	10.81	10.23	10.22	9.72	10.09	9.71	9.4	9.65	9.4	9.65	9.37
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	11.39	9.9	9.57	9.05	9.04	8.6	8.93	8.59	8.32	8.54	8.32	8.54	8.29

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

4-stage

up to 24 / 38<sup>4)</sup>  
(G<sup>5)</sup> / K) clamping  
hub diameter

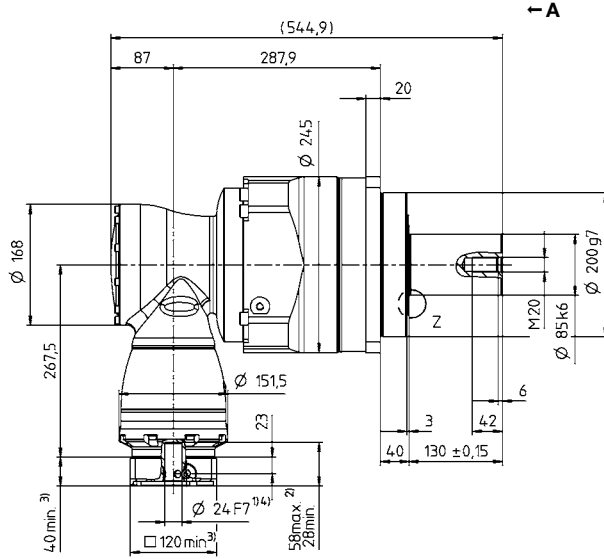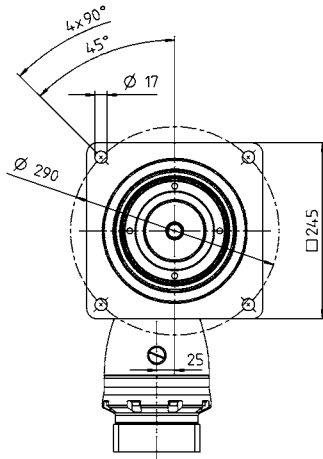


Hypoid gearboxes



SPK

Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter

# SPK+ 240 MF 4-stage i=1225-10000

			4-stage									
Ratio	<i>i</i>		1225	1400	1750	2000	2800	3500	5000	7000	10000	
Max. torque <sup>a) b) e)</sup>	$T_{2a}$	Nm	5700	5700	5700	4200	5446	5700	5700	5700	3642	
		in.lb	50450	50450	50450	37173	48201	50450	50450	50450	32235	
Max. acceleration torque <sup>b) e)</sup> (max. 1000 cycles per hour)	$T_{2B}$	Nm	5400	5400	5400	4200	5400	5400	5160	4730	3642	
		in.lb	47794	47794	47794	37173	47794	47794	45670	41864	32235	
Nominal torque (at $n_n$ )	$T_{2N}$	Nm	2500	2500	2500	2500	2500	2500	2500	2300	1700	
		in.lb	22127	22127	22127	22127	22127	22127	22127	20357	15046	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	8500	8500	8500	8000	8500	8500	8500	8500	6850	
		in.lb	75232	75232	75232	70806	75232	75232	75232	75232	60628	
Permitted average input speed (at $T_{2a}$ and 20 °C ambient temperature) <sup>d)</sup>	$n_{1N}$	$n_{1T}$	2900	2900	3200	3900	3900	3900	3900	3900	3900	
Max. input speed	$n_{1Max}$	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	0.9	0.9	0.6	0.6	0.6	0.6	0.6	0.45	0.45	
		in.lb	8.0	8.0	5.3	5.3	5.3	5.3	5.3	4.0	4.0	
Max. backlash	$j_t$	arcmin	Standard $\leq 5.5$ / Reduced $\leq 3.5$									
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	510	510	510	510	510	510	510	510	510	
		in.lb/arcmin	4514	4514	4514	4514	4514	4514	4514	4514	4514	
Max. axial force <sup>c)</sup>	$F_{2AMax}$	N	33000									
		lb <sub>f</sub>	7425									
Max. lateral force <sup>c)</sup>	$F_{2QMax}$	N	30000									
		lb <sub>f</sub>	6750									
Max. tilting moment	$M_{2KMax}$	Nm	5000									
		in.lb	44254									
Efficiency at full load	$\eta$	%	90									
Service life	$L_h$	h	> 20000									
Weight (incl. standard adapter plate)	$m$	kg	96									
		lb <sub>m</sub>	212									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	$\leq 71$									
		°C	+90									
Max. permitted housing temperature		F	194									
		°C	0 to +40									
Ambient temperature		F	32 to 104									
Lubrication			Lubricated for life									
Direction of rotation			In- and output opposite direction									
Protection class			IP 65									
Metal bellows coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			BC2 - 06000AA - 085.000 - X									
		Bore diameter of coupling on the application side	mm	X = 060.000 - 140.000								
Mass moment of inertia (relates to the drive)	G 24	$J_1$	kgcm <sup>2</sup>	2.73	2.49	2.46	2.42	2.42	2.42	2.42	2.42	2.42
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	2.42	2.2	2.18	2.14	2.14	2.14	2.14	2.14	2.14
Clamping hub diameter [mm]	K 38	$J_1$	kgcm <sup>2</sup>	9.64	9.4	9.37	9.33	9.33	9.33	9.33	9.33	9.33
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	8.53	8.32	8.29	8.26	8.26	8.26	8.26	8.26	8.26

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)  
Please contact us for optimum sizing at S1 conditions (Continuous operation).



- <sup>a)</sup> At max. 10 %  $F_{2QMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Smooth shaft

View A

Motor shaft diameter [mm]

4-stage

up to 24 / 38<sup>4)</sup>  
(G<sup>5)</sup> / K) clamping  
hub diameter

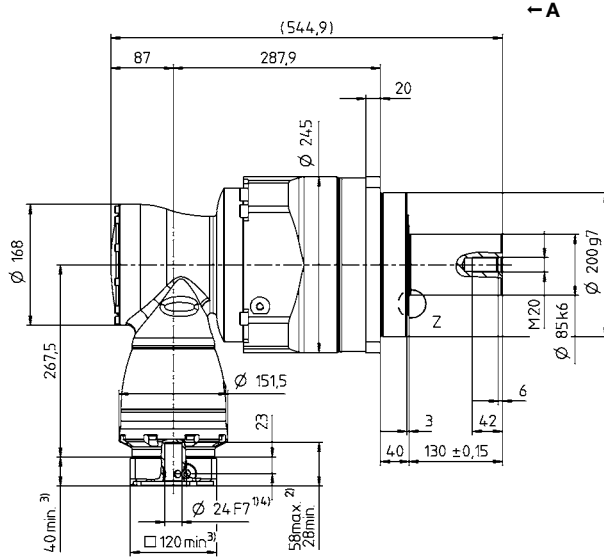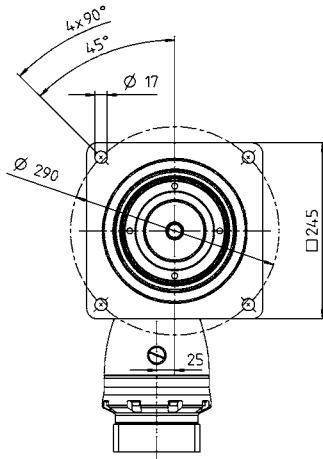


Hypoid gearboxes



SPK

Other output variants

Shaft with key



Splined shaft (DIN 5480)



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- Non-tolerated dimensions are nominal dimensions
- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- <sup>5)</sup> Standard clamping hub diameter

# Basic Line gearbox overview



Product type		CP	CPS	CPK	CPSK	CVH	CVS
Version		MF	MF	MF	MF	MF / MT	MF / MT
Ratio <sup>c)</sup>	min. $i =$	3	3	3	3	7	7
	max. $i =$	100	100	100	100	40	40
Max. torsional backlash [arcmin] <sup>c)</sup>	Standard	≤ 12	≤ 12	≤ 13	≤ 15	≤ 15	≤ 15
	Reduced	–	–	–	–	–	–
<b>Output shape</b>							
Smooth shaft		x	x	x	x	–	x
Shaft with key <sup>d)</sup>		x	x	x	x	–	x
Splined shaft (DIN 5480)		–	–	–	–	–	–
Blind hollow shaft		–	–	–	–	–	–
Hollow shaft interface		–	–	–	–	x	–
Keyed hollow shaft		–	–	–	–	x	–
Flanged hollow shaft		–	–	–	–	–	–
Flange		–	–	–	–	–	–
System output		–	–	–	–	–	–
Output on both sides		–	–	–	–	x	x
<b>Input type</b>							
Motor-mounted		x	x	x	x	x	x
Self-contained version <sup>b)</sup>		–	–	–	–	–	–
<b>Characteristic</b>							
Flange with slotted holes		–	–	–	–	–	–
ATEX <sup>a)</sup>		–	–	–	–	–	–
Food-grade lubrication <sup>a) b)</sup>		x	x	x	x	x	x
Corrosion resistant <sup>a) b)</sup>		–	–	–	–	–	–
Optimized mass inertia <sup>a)</sup>		–	–	–	–	–	–
<b>System solutions</b>							
Linear system (rack / pinion)		–	–	–	–	–	–
Servo actuator		–	–	–	–	–	–
<b>Accessories</b> (please refer to the product pages for further options)							
Coupling		x	x	x	x	–	x
Shrink disc		–	–	–	–	x	–

<sup>a)</sup> Power reduction: technical data available on request

<sup>b)</sup> Please contact WITTENSTEIN alpha

<sup>c)</sup> In relation to reference sizes

<sup>d)</sup> Power reduction: Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

# Value Line gearbox overview



Product type		NP	NPL	NPS	NPT	NPR	NPK	NPLK	NPSK	NPTK	NPRK	NVH	NVS	HDV
Version		MF / MA	MF / MA	MF / MA	MF / MA	MF / MA	MF	MF	MF	MF	MF	MF	MF	MF / MT
Ratio <sup>a)</sup>	min. $i =$	3	3	3	3	3	3	3	3	3	3	4	4	4
	max. $i =$	100	100	100	100	100	100	100	100	100	100	400	400	100
Max. torsional backlash [arcmin] <sup>a)</sup>	Standard	≤ 8	≤ 8	≤ 8	≤ 8	≤ 8	≤ 11	≤ 11	≤ 11	≤ 11	≤ 11	≤ 6	≤ 6	≤ 10
	Reduced	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Output type</b>														
Smooth shaft		x	x	x	-	x	x	x	x	-	x	-	x	x
Shaft with key <sup>a)</sup>		x	x	x	-	x	x	x	x	-	x	-	x	x
Splined shaft (DIN 5480)		-	x	x	-	x	-	x	x	-	x	-	-	-
Blind hollow shaft		-	-	-	-	-	-	-	-	-	-	-	-	-
Hollow shaft interface		-	-	-	-	-	-	-	-	-	-	x	-	-
Keyed hollow shaft		-	-	-	-	-	-	-	-	-	-	x	-	-
Flanged hollow shaft		-	-	-	-	-	-	-	-	-	-	-	-	-
Flange		-	-	-	x	-	-	-	-	x	-	-	-	-
System output		-	-	-	-	-	-	-	-	-	-	-	-	-
Output on both sides		-	-	-	-	-	-	-	-	-	-	x	x	-
<b>Input type</b>														
Motor-mounted		x	x	x	x	x	x	x	x	x	x	x	x	x
Self-contained version <sup>b)</sup>		-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Characteristic</b>														
Flange with slotted holes		-	-	-	-	x	-	-	-	-	x	-	-	-
ATEX <sup>a)</sup>		-	-	-	-	-	-	-	-	-	-	-	-	-
Food-grade lubrication <sup>a) b)</sup>		x	x	x	x	x	x	x	x	x	x	x	x	x
Corrosion resistant <sup>a) b)</sup>		-	-	-	-	-	-	-	-	-	-	x	x	x
Optimized mass inertia <sup>a)</sup>		-	-	-	-	-	-	-	-	-	-	-	-	-
<b>System solutions</b>														
Linear system (rack / pinion)		x	x	x	-	x	x	x	x	-	x	-	x	-
Servo actuator		-	-	-	-	-	-	-	-	-	-	-	-	x
<b>Accessories</b> (please refer to the product pages for further options)														
Coupling		x	x	x	x	x	x	x	x	-	x	-	x	-
Shrink disc		-	-	-	-	-	-	-	-	-	-	x	-	-

<sup>a)</sup> Power reduction: technical data available on request

<sup>b)</sup> Please contact WITTENSTEIN alpha

<sup>c)</sup> In relation to reference sizes

<sup>d)</sup> Power reduction: Please use our sizing software cymex® for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)



# Advanced Line gearbox overview



Product type		SP+	SP+ HIGH SPEED	SP+ HIGH SPEED friction optimized	TP+	TP+ HIGH TORQUE	HG+	SK+	SPK+
Version		MF	MC	MC-L	MF	MA	MF	MF	MF
Catalog page		26	26	26	80	80	128	140	150
Ratio <sup>c)</sup>	min. i =	3	3	3	4	22	3	3	12
	max. i =	100	100	10	100	302.5	100	100	10000
Max. torsional backlash [arcmin] <sup>c)</sup>	Standard	≤ 3	≤ 4	≤ 4	≤ 3	≤ 1	≤ 4	≤ 4	≤ 4
	Reduced	≤ 1	≤ 2	≤ 2	≤ 1	–	–	–	≤ 2
<b>Output shape</b>									
Smooth shaft		x	x	x	–	–	–	x	x
Shaft with key <sup>d)</sup>		x	x	x	–	–	–	x	x
Splined shaft (DIN 5480)		x	x	x	–	–	–	x	x
Blind hollow shaft		x	x	x	–	–	–	–	x
Hollow shaft interface		–	–	–	–	–	x	–	–
Keyed hollow shaft		–	–	–	–	–	–	–	–
Flanged hollow shaft		–	–	–	–	–	–	–	–
Flange		–	–	–	x	x	–	–	–
System output		–	–	–	x	x	–	–	–
Output on both sides		–	–	–	–	–	x	x	x
<b>Input type</b>									
Motor-mounted		x	x	x	x	x	x	x	x
Self-contained version <sup>b)</sup>		x	–	–	x	–	–	–	–
<b>Characteristic</b>									
Flange with slotted holes		x	–	–	–	–	–	–	–
ATEX <sup>a)</sup>		x	x	–	–	–	x	x	–
Food-grade lubrication <sup>a) b)</sup>		x	x	x	x	x	x	x	x
Corrosion resistant <sup>a) b)</sup>		x	x	x	x	x	x	x	x
Optimized mass inertia <sup>a)</sup>		x	x	x	x	x	–	–	–
<b>System solutions</b>									
Linear system (rack / pinion)		x	x	–	x	x	–	x	x
Servo actuator		x	–	–	x	x	–	–	–
<b>Accessories</b> (please refer to the product pages for further options)									
Coupling		x	x	x	x	x	–	x	x
Shrink disc		x	x	x	–	–	x	–	x

<sup>a)</sup> Power reduction: technical data available on request

<sup>b)</sup> Please contact WITTENSTEIN alpha

<sup>c)</sup> In relation to reference sizes

<sup>d)</sup> Power reduction: Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)



TK+	TPK+	TPK+ HIGH TORQUE	SC+	SPC+	TPC+	VH+	VS+	VT+	DP+	HDP+
MF	MF	MA	MF	MF	MF	MF	MF	MF	MF / MA	MA
178	188	188	228	238	248	262	272	280	292	308
3	12	66	1	4	4	4	4	4	16	22
100	10000	5500	2	20	20	400	400	400	55	55
≤ 4	≤ 4	≤ 1.3	≤ 4	≤ 4	≤ 4	≤ 3	≤ 3	≤ 3	≤ 3	≤ 1
-	≤ 2	-	-	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 1	-

-	-	-	x	x	-	-	x	-	-	-
-	-	-	x	x	-	-	x	-	-	-
-	-	-	-	x	-	-	x	-	-	-
-	-	-	-	x	-	-	-	-	-	-
-	-	-	-	-	-	x	-	-	-	-
-	-	-	-	-	-	x	-	-	-	-
x	-	-	-	-	-	-	-	x	-	-
-	x	x	-	-	x	-	-	-	x	x
-	x	x	-	-	x	-	-	-	-	-
x	x	x	-	-	-	x	x	-	-	-

x	x	x	x	x	x	x	x	x	x	x
-	-	-	-	-	-	-	-	-	-	-

-	-	-	-	-	-	-	-	-	-	-
x	-	-	-	-	-	-	-	-	-	-
x	x	x	x	x	x	x	x	x	x	x
x	x	x	-	-	-	x	x	x	x	x
-	-	-	-	-	-	-	-	-	x	x

x	x	x	x	x	x	-	x	x	-	-
-	-	-	-	-	-	-	-	-	-	-

x	x	x	x	x	x	-	x	x	-	-
-	-	-	-	x	-	x	-	-	-	-

# Premium Line gearbox overview



Product type		XP+	RP+	XPK+	RPK+	XPC+	RPC+
Version		MF / MC	MF / MA	MF	MA	MF	MA
Ratio <sup>c)</sup>	min. $i =$	3	22	12	48	4	22
	max. $i =$	100	220	1000	5500	20	55
Max. torsional backlash [arcmin] <sup>c)</sup>	Standard	$\leq 3$	$\leq 1$	$\leq 4$	$\leq 1.3$	$\leq 4$	$\leq 1.3$
	Reduced	$\leq 1$	–	$\leq 2$	–	$\leq 2$	–
<b>Output shape</b>							
Smooth shaft		x	–	x	–	x	–
Shaft with key <sup>d)</sup>		x	–	x	–	x	–
Splined shaft (DIN 5480)		x	–	x	–	x	–
Blind hollow shaft		x	–	x	–	x	–
Hollow shaft interface		–	–	–	–	–	–
Keyed hollow shaft		–	–	–	–	–	–
Flanged hollow shaft		–	–	–	–	–	–
Flange		–	x	–	x	–	x
System output		x	x	x	x	x	x
Output on both sides		–	–	–	–	–	–
<b>Input type</b>							
Motor-mounted		x	x	x	x	x	x
Self-contained version <sup>b)</sup>		x	–	–	–	–	–
<b>Characteristic</b>							
Flange with slotted holes		x	x	x	x	x	x
ATEX <sup>a)</sup>		–	–	–	–	–	–
Food-grade lubrication <sup>a) b)</sup>		x	x	x	x	x	x
Corrosion resistant <sup>a) b)</sup>		–	–	–	–	–	–
Optimized mass inertia <sup>a)</sup>		x	x	–	–	–	–
<b>System solutions</b>							
Linear system (rack / pinion)		x	x	x	x	x	x
Servo actuator		x	x	–	–	–	–
<b>Accessories</b> (please refer to the product pages for further options)							
Coupling		x	–	x	–	x	–
Shrink disc		x	–	x	–	x	–

<sup>a)</sup> Power reduction: technical data available on request

<sup>b)</sup> Please contact WITTENSTEIN alpha

<sup>c)</sup> In relation to reference sizes

<sup>d)</sup> Power reduction: Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

# Overview of gearbox variants

SP 100 S - MF 1 - 10 - 0G 1 - 2S

## Characteristic:

B = Modular output combination  
C = Reverse centering  
E = ATEX  
F = Food grade lubrication  
G = Grease  
H = Food-grade grease  
L = Friction optimized  
R = Flange with slotted holes  
S = Standard  
W = Corrosion resistant


Explanation of variants deviating from the standard:

### B = Modular output combination

An additional backward output type is available for hypoid gearboxes. See page 353 for details.

### C = Reverse centering

To save space, this variant offers greater flexibility in mounting the product on the machine.



### E = ATEX

Devices bearing the Ex symbol comply with EU Directive 2014/34/EN (ATEX) and are approved for use in defined explosion-prone zones. Performance data is limited and can be found in the operating instructions.

### F = Food grade lubrication

These products are available with food-grade lubrication and can therefore be used in the food industry. Please note that the torque ratings in the catalog are reduced by 20 % (excluding V-Drive).

### G = Grease

This variant allows you to lubricate selected products with grease instead of oil. Please note that the torque ratings in the catalog are reduced by 20 %.

### H = Food-grade grease

This variant allows you to lubricate selected products with food-safe grease instead of oil. Please note that the torque ratings in the catalog are reduced by 40%.

### L = Friction optimized

A friction-optimized variant is available for HIGH SPEED products.

Design changes allow the products to be used particularly in applications with high temperature sensitivity, high nominal speeds or long duty cycles.

### R = Flange with slotted holes

This output type is designed for linear applications with rack and pinion or belt pulley. Integrated slotted holes enable easy positioning of the pinion or simple tensioning of the belt.

### W = Corrosion resistant

These products can be used in corrosive environments, e.g. in the food industry, pharmaceutical industry or packaging industry. All external product areas have been designed to avoid corrosion. In addition the products are provided with food-grade grease lubrication. Please note that the torque ratings in the catalog are reduced by 20 % (excluding V-Drive).

# alpha Advanced Linear Systems

## Strong performance in the advanced segment

Advanced Linear Systems are adapted to applications with average to high demands in terms of smooth running, positioning accuracy and feed force. Different gearbox versions and options such as HIGH TORQUE or HIGH SPEED can be selected to utilize the most appropriate system for the application. Typical fields of application include wood, plastic and composite machining, machining centers and automation.

## The alpha preferred linear system – The best of each segment

Our preferred linear systems in the Advanced Segment are always comprised of the perfect combination of gearbox, pinion, rack and lubrication system. The systems are optimized to achieve the required feed force, feed speed, rigidity and degree of utilization of the individual components.



**For further information, refer to our alpha Linear Systems catalog and our website:**  
[www.wittenstein-alpha.com/linear-systems](http://www.wittenstein-alpha.com/linear-systems)

## For a wide range of applications

Linear systems from WITTENSTEIN alpha are suitable for a wide range of applications and industries. New standards and advantages have been achieved in the following areas:

- Smooth operation
- Positioning accuracy
- Feed force
- Power density
- Rigidity
- Easy installation
- Design options
- Scalability

Together with a comprehensive range of services, we pledge to support you from the initial concept to the design, installation and commissioning phase. We will also ensure a consistent supply of spare parts.

## Your benefits at a glance

Perfectly adapted linear systems available with planetary, right-angle and worm gearboxes or as an actuator

Optionally with INIRA®

Large individual configuration range due to numerous pinion/gearbox combinations



# INIRA®: The revolution in rack assembly



Simply scan the QR code using your smartphone to see INIRA® in action.

**INIRA® combines our existing innovative concepts for the simple, safe and efficient installation of racks. INIRA® clamping, INIRA® adjusting and INIRA® pinning have already made the assembly process much faster, more accurate and more ergonomic. Available for the Advanced and Premium Linear Systems.**

**INIRA® clamping:** Simply faster and more ergonomic  
Previously, enormous effort was required to clamp racks to the machine bed using screw clamps. INIRA® clamping integrates the clamping device in the rack. The rack incorporates a mounting sleeve which is guided over the head of the fastening screw to ensure quick and ergonomic clamping.

**INIRA® pinning:** Simply better and more efficient  
The previous method used for pinning racks was extremely time-consuming. Precision bores have to be drilled and the chips generated must be carefully removed from the assembly. INIRA® pinning now offers a completely new solution for the chipless pinning of racks, which reduces installation times considerably (time spent on each rack ~ 1 min).

**INIRA® adjusting:** Simply safer and more precise  
In combination with INIRA® clamping, INIRA® adjusting is the ideal solution for perfectly adjusting the transition between two rack segments. The innovative setting tool can adjust the transition extremely reliably and precisely, accurate to the micrometer.




INIRA® clamping



INIRA® adjusting



INIRA® pinning

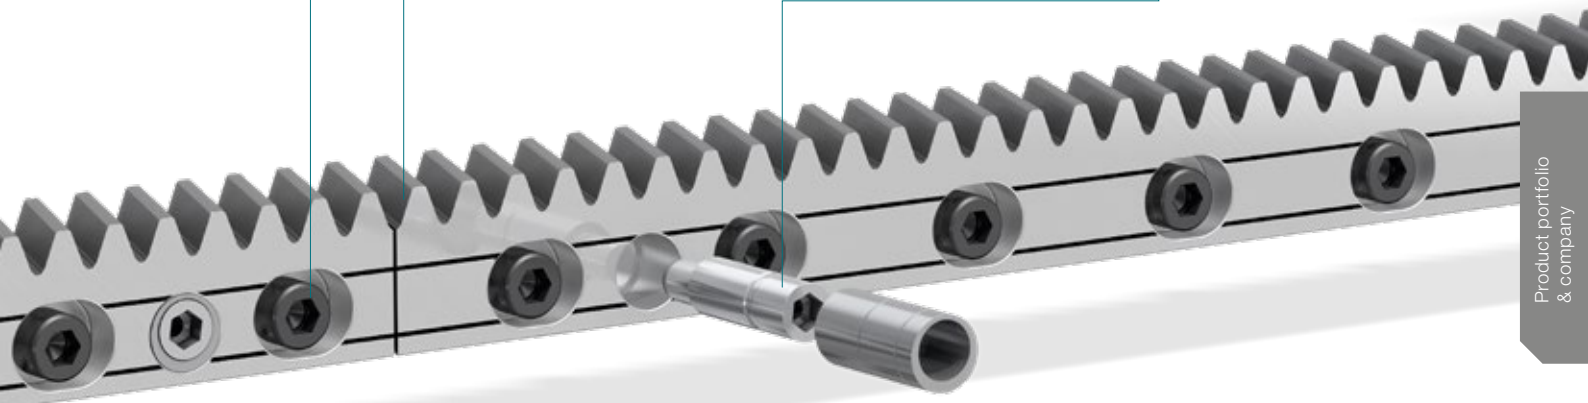


# Precision meets motion = premo® by WITTENSTEIN alpha

premo® is a new, powerful servo actuator platform that combines absolute precision with perfect movement. The central idea behind this first fully scalable servo actuator platform is uncompromising flexibility from the viewpoint of the user. Motors and gearboxes with application-related graduated performance characteristics can be configured modularly to individual servo actuators. The result is a

highly versatile modular system with customizable power, designed for a wide variety of applications. The core of the servo actuator is a torsionally rigid precision gearbox with low backlash and excellent torque density combined with the equally powerful, permanent magnet servo motor with a split winding that guarantees low cogging and minimal velocity ripple.


## premo® – clearly superior in performance

- Higher machine performance thanks to higher acceleration torque
- High torque density combined with a compact design allow for the realization of higher performance machines with significant space saving
- Improved connectivity to next generation controllers from leading system providers through the use of digital feedback (EnDat 2.2, DSL, HIPERFACE DSL®, DRIVE-CLiQ)
- Compatibility for high bus voltages up to 750 V DC
- Reduced wiring requirement through single-connector technology
- Improved reliability and safety through the use of more powerful brakes and SIL 2 encoders

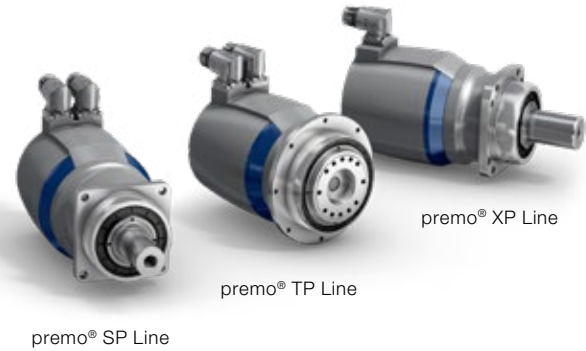

### Product highlights


- Optimized power density for greater energy efficiency and productivity
- Flexible mechanical and electrical interfaces for high scalability
- Variety of options for individually upgrading the basic configuration

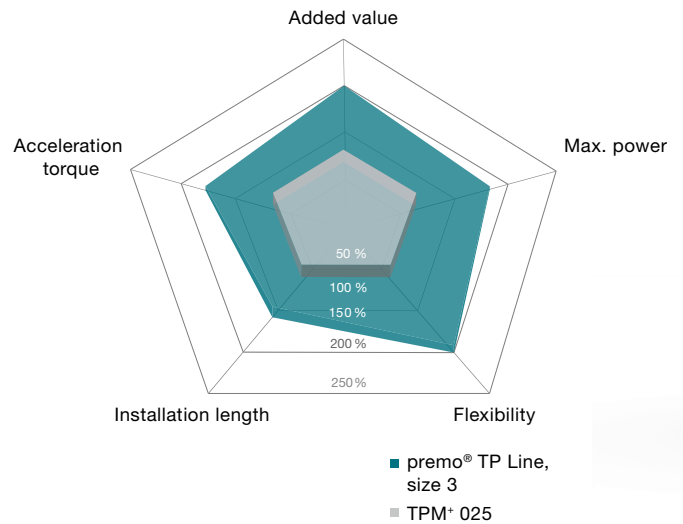


## premo® application examples



Handling portal  
premo® SP Line




Fill and Seal machine  
premo® TP Line



Milling cutter for a machining center  
premo® XP Line

## Typical fields of application and industry solutions

- Delta robot (axes 1–3, swivel axis)
- Handling portal (Z-axis, swivel/rotating axis)
- Machine tool reaming (rotating axes A–C, tool changer)
- Fill and Seal Machine (incl. jaw stroke, sealing jaw, blade)
- Folding carton packaging (incl. assembly/folding, filling valve)
- Plastic thermoform (tool axis)


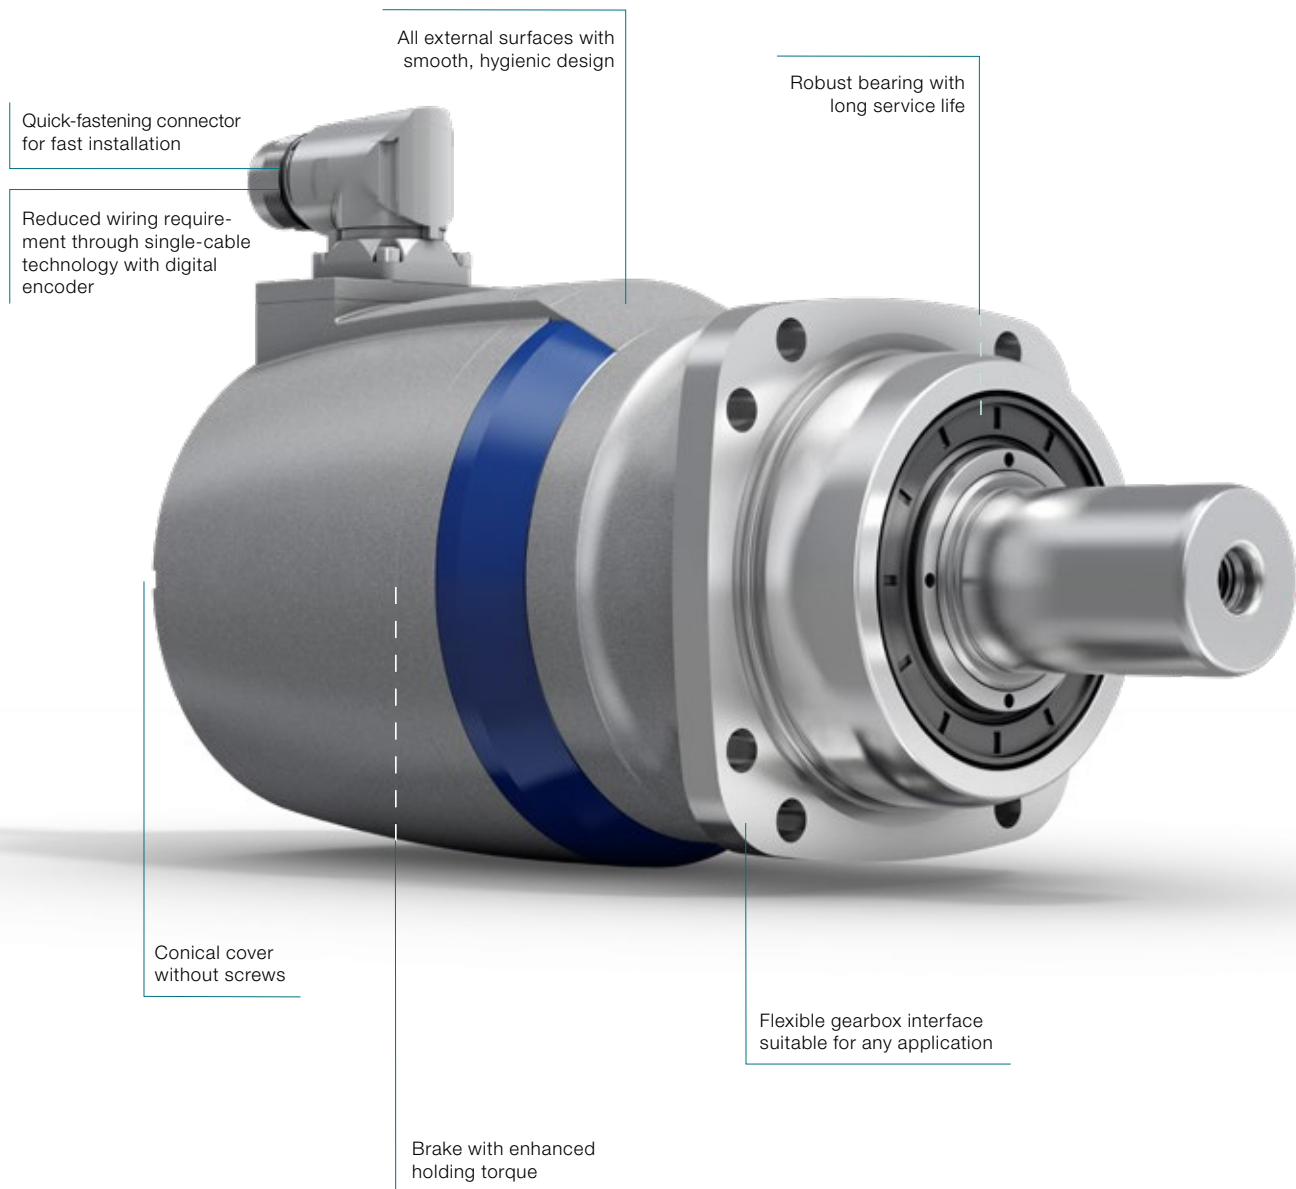




# Accessories – smart additions for intelligent performance

Gearboxes, accessories and consulting from a single source

Optimization of your added value chain  
Use the combination of gearbox and accessories in a complete package to streamline your internal processes.

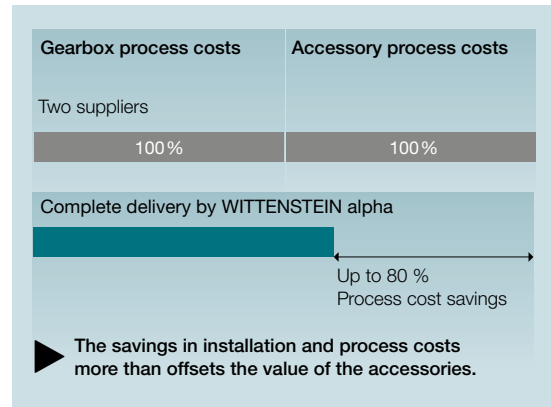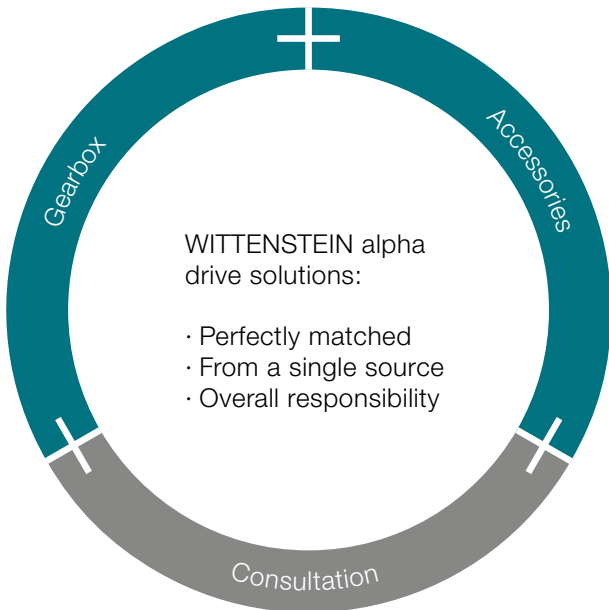

## Shrink disks

Shrink disks are frictional hub / shaft connections. Together with our hollow shaft or mounted shaft gearboxes for mounting directly on load shafts, machines can be designed to take up a minimal installation space.

The benefits:

- Simple mounting and removal
- Quick selection, easy and convenient
- Optional: corrosion resistant version




### Preferred shrink disk series

To view a wide range of nickel-plated, stainless steel and other shrink disks as well as all the relevant technical data and dimensions, visit our homepage [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

# Couplings

Couplings are used for compensating misalignment during assembly and material-related heat expansion

## Compensation for shaft misalignment

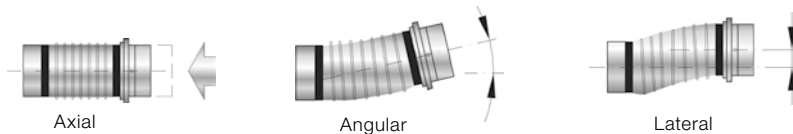

### Metal bellows coupling

- Compensation for shaft misalignment
- Completely backlash free
- Corrosion resistant version available as an option (BC2, BC3, BCT)
- High torsional rigidity



### Elastomer coupling


- Compensation for shaft misalignment
- Completely backlash free
- Selectable torsional rigidity/damping
- Compact design
- Extremely simple installation (plug-in)



### Torque limiter

- Compensation for shaft misalignment
- Completely backlash free
- Precise, preset overload protection (switch-off in 1 – 3 ms)
- Precise repeat accuracy
- Just one protection element per axis

## Preferred coupling series

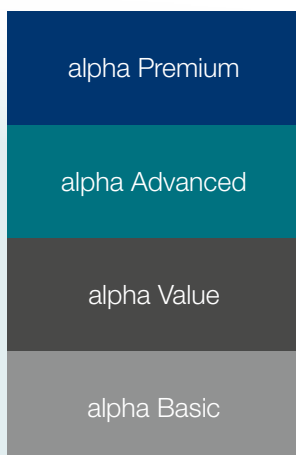

Preferred series are defined for the relevant gearbox segments to make selection easier. Preferred couplings are defined based on the maximum torque that the gearbox can transmit. Standard industrial conditions for the number of cycles (1000/h) and ambient temperature were adopted.

Please note that the coupling load is based on the torque that the gearbox can transmit and not the torque in your application. We recommend using our cymex®5 design software to create a more detailed design. ([www.wittenstein-cymex.com](http://www.wittenstein-cymex.com))

For more coupling types, please visit [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

# Support at each interaction stage

With the WITTENSTEIN alpha service concept, we are also setting new standards in the field of customer support.

## Global presence

Our global consultation network will help you overcome your complex challenges through our extensive experience, a variety of design tools and individual engineering services.

## Speed counts

Our speedline® team guarantees fast response times in the area of logistics. We provide on-site support during the installation and commissioning of mechanical systems to give you a sustained competitive edge.

## Personal consultation

Our highly qualified and committed expert personnel will accompany you throughout the entire product lifecycle - around the clock. When it comes to customer support, you can count on us!

## Design

Consultation  
CAD POINT  
SIZING ASSISTANT  
Sizing software cymex®  
Engineering

## Installation

speedline® delivery  
Installation on-site  
Operating & installation instructions  
Pick-up & return service




We are happy to advise you:

24 h service hotline: +49 7931 493-12900

### No matter where you need us:

A comprehensive sales and service network provides quick availability and competent support worldwide.

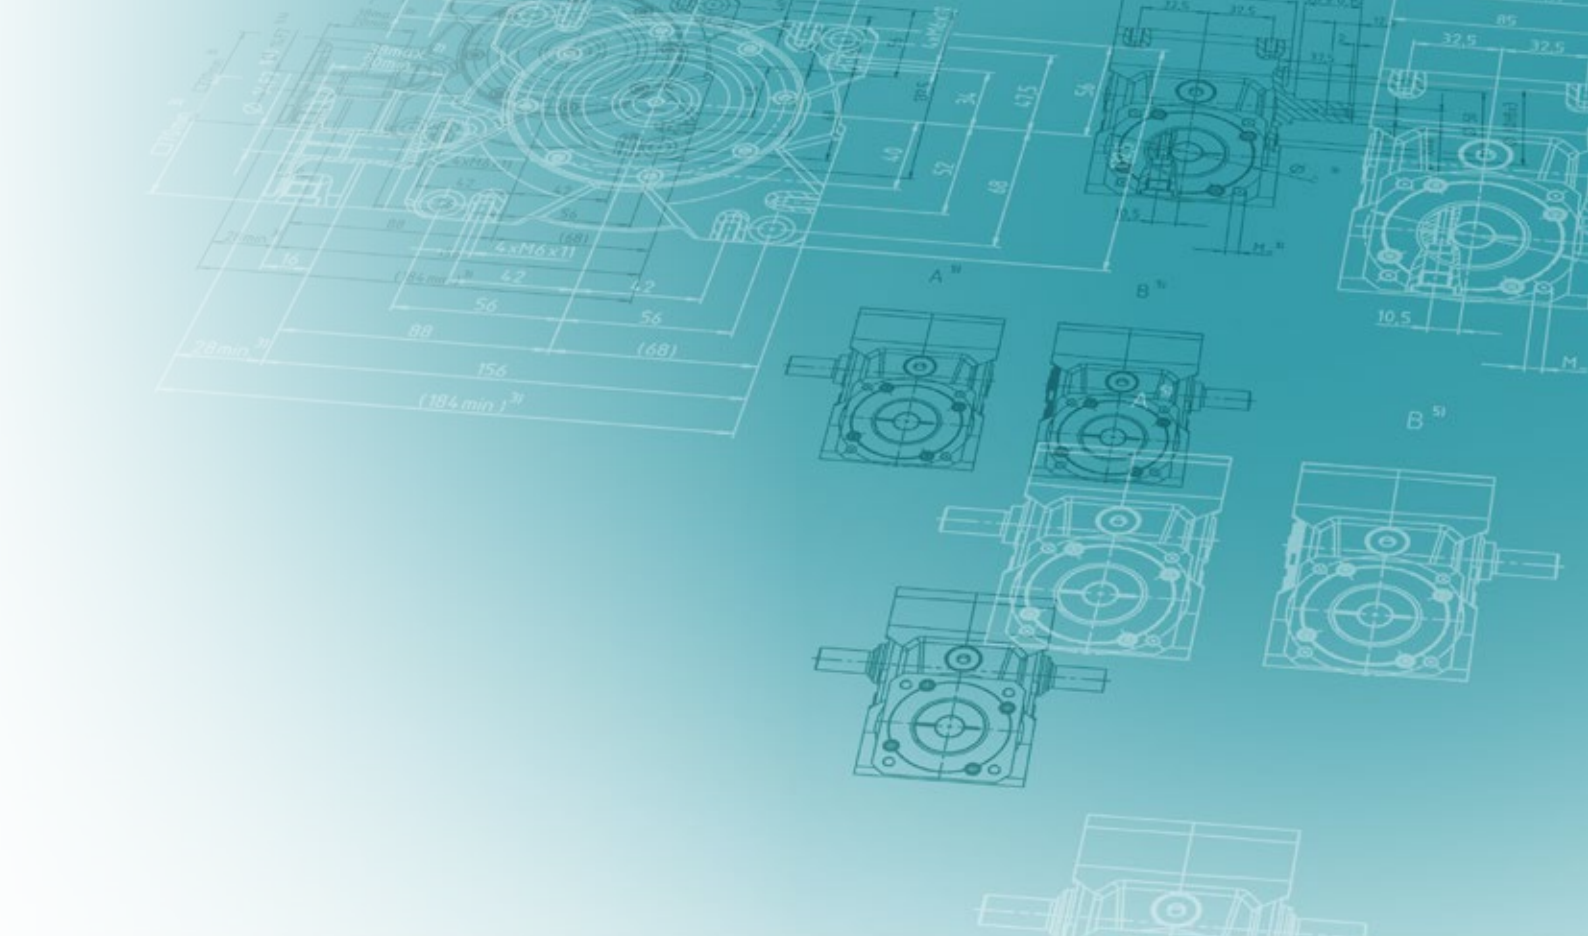

## Maintenance

24 h service hotline  
Maintenance and inspection  
Repair  
cymex® statistics  
Modernization

## Training

Product training  
Sizing training  
Installation training  
Service training

# Support at each interaction stage

## Design

Whatever your requirements are: we offer the right design methodology. Use the CAD POINT to gain easy access to CAD files, the SIZING ASSISTANT for creating simple

designs, cymex® 5 for precise dimensioning and our engineering service for individual solutions.

### Consultation

- Personal contact on-site
- Professional application calculations and drive design create the best solutions



### CAD POINT

- 3D data of selected solution
- Online comparison with motor geometry
- Transparent and simple selection of required components

### Engineering

#### Catalog gearboxes:

- Advanced software tools for accurate calculation, simulation and analysis of the drive train
- Optimization of your productivity and reduction in development costs



### SIZING ASSISTANT

- Efficient online design within seconds
- Convenient comparison function
- Automatic geometry adjustment

#### Special gearboxes:

- Gearing design and development
- Development and production of special gearboxes
- Send all inquiries to: [sondergetriebe@wittenstein.de](mailto:sondergetriebe@wittenstein.de)



### cymex® 5 sizing software

- Dimensioning, design and evaluation of the entire drive train
- Reliable, efficient design
- Optimization of drive system



## Installation

All delivered products are perfectly matched to your application environment and fully operational right away.

Our service experts support you in the installation and commissioning of complex mechatronic systems, guaranteeing maximum availability of your plant.

### speedline® delivery

**Tel. +49 7931 493-10444**

- Delivery of standard series in 24 or 48 hours ex works\*
- Outstanding flexibility for fast deliveries at short notice

### Operating and installation instructions

- Detailed explanations of how to use the product
- Motor installation videos
- Assembly videos on rack and pinion system

### Installation on-site

- Professional installation
- Optimal integration of the system in your application
- Explanation of the drive function

### Pick-up and return service

- Cost savings through minimization of downtimes
- Professional logistics organization
- Reduction of transport risks through customized, direct pick-up and delivery



\* Non-binding delivery time depending on part availability.

# Support at each interaction stage

## Maintenance

WITTENSTEIN alpha guarantees fast repairs of the highest quality and precision – with short throughput times and intensive support. In addition, we will provide you with information about various measurements, material

analyses and condition monitoring inspections. You can rely on short response times, unbureaucratic processing and individual support.

### 24 h service hotline

**Tel. +49 7931 493-12900**

- Available round the clock
- Personal, prompt service for resolving time-critical maintenance issues

### cymex® statistics

- Systematic field data acquisition
- Reliability calculations (MTBF)
- Customized evaluations

### Maintenance and inspection

- Documentation regarding condition and expected service life
- Maintaining required state
- Customized maintenance schedules

### Modernization

- Professional retrofitting
- Reliable compatibility testing of existing solutions

### Repair

- Restoring to required state
- Short throughput times
- Immediate response in time-critical situations



## Training

Discover how our products function and how they can add value to your application. We offer you training courses at our premises or on-site at your plant. Benefit from

practice-oriented learning methods and a highly skilled team of trainers.

### Product training

Greater knowledge enables greater achievement. We will be pleased to share our expert knowledge with you: Profit from our many years of experience and learn more about the product portfolio of WITTENSTEIN alpha.

### Installation training

We offer you individual training courses on-site for your system application of selected linear axes as well as professional installation.

### Sizing training

Become a design expert! We will provide you with training courses on our design software, adapted to your requirements. Whether for beginners or experts, for occasional or regular users – we adapt our training course to your wishes and requirements.

### Service training

Participation in a service training course is a prerequisite for sourcing spare parts at the parts list level. We offer you training courses at our premises or on-site at your plant. Moreover, we regularly host maintenance workshops at which the participants are instructed in safe handling during mounting of the motor to the gearbox as well as the independent replacement of wearing parts and gearbox assemblies.





# The WITTENSTEIN group – The company and its fields of business



**WITTENSTEIN**

With approximately 2,900 employees worldwide, WITTENSTEIN SE stands for innovation, precision and excellence in the world of mechatronic drive technology, both nationally and internationally. The group is active in seven innovative fields of business. Furthermore, WITTENSTEIN SE is represented by some 60 subsidiaries in around 40 countries in all important technology and sales markets worldwide.



## Our fields of expertise

### We provide know-how for a host of different sectors:

- Machine and plant construction
- Software development
- Aerospace
- Automotive & E-mobility
- Energy
- Oil & Gas Exploration and Production
- Medical technology
- Measurement and testing technology
- Nanotechnology
- Simulation

# The WITTENSTEIN Group



WITTENSTEIN alpha GmbH  
High-precision servo drives and linear systems



WITTENSTEIN cyber motor GmbH  
Highly dynamic servo motors and drive electronics



WITTENSTEIN galaxie GmbH  
Superior gearboxes and drive systems



WITTENSTEIN motion control GmbH  
Customized linear and rotary servo systems



WITTENSTEIN aerospace & simulation GmbH  
Mechatronic drive systems for aerospace & simulation



attocube systems AG  
Nanoprecision drive and measurement technology solutions



baramundi software AG  
Secure management of IT infrastructure in offices and production areas




# Gearbox general – Detailed sizing

Cyclic operation **S5** and continuous operation **S1**

## Calculate the duty cycle ED

$$ED = \frac{(t_b + t_c + t_d)}{(t_b + t_c + t_d + t_e)} \cdot 100$$

$$ED = t_b + t_c + t_d$$

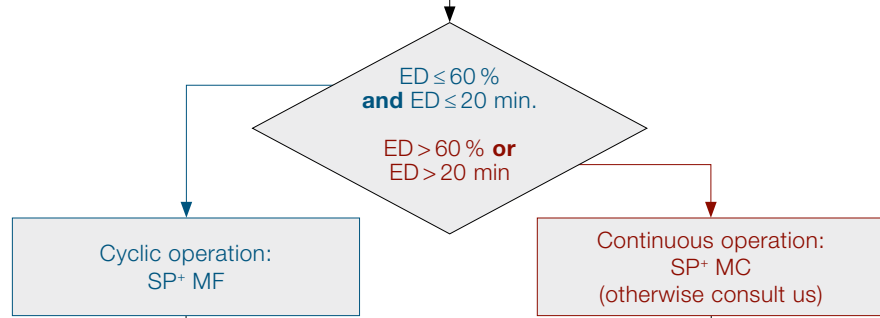

$$Z_n = \frac{3600}{(t_b + t_c + t_d + t_e)} \quad \text{see diagram 1}$$

$f_s$  is dependent on  $Z_n$  see diagram 2

$T_{2b}$  depends on the application

$$T_{2b, fs} = T_{2b} \cdot f_s$$

$$f_0 = \frac{t_{\alpha 1} + \dots + t_{\alpha n}}{t_{ges}}$$

$t_\alpha$  = elevation time  
 $t_\alpha$  = operating time with

$$T_{2b, fs} \geq T_{2B}$$

$$n_{2m} = \frac{|n_{2b}| \cdot t_b + \dots + |n_{2n}| \cdot t_n}{t_b + \dots + t_n} \quad \text{incl. pause time}$$

$$n_{2m\alpha} = \frac{|n_{2\alpha 1}| \cdot t_{\alpha 1} + \dots + |n_{2\alpha n}| \cdot t_{\alpha n}}{t_{\alpha 1} + \dots + t_{\alpha n}}$$

$$f_\alpha = n_{2m\alpha} \cdot L_h \cdot f_0$$

$L_h$  = required service life

**i** depends on  
 - required output speed (for the application)  
 - reasonable input speed (gearbox / motor)

$$n_{1max} = n_{2max} \cdot i$$

$$n_{1max} \leq n_{1Mot max}$$

**T** – consisting of corresponding output and input torque

$$T_{1b} = T_{2b} \cdot \frac{1}{i} \cdot \frac{1}{\eta} \quad T_{1b} \leq T_{Mot max}$$

$\lambda$  – from resulting inertia ratio.  
 Guide value:  $1 \leq \lambda \leq 10$   
 (see alphabet for calculation)

$n_{2max}$  depends on the application

Calculate the number of cycles  $Z_n$

Calculate the shock factor  $f_s$  see diagram 2

Calculate the max. acceleration torque at the output including the shock factor  $T_{2b, fs}$

Calculate the elevation range  $f_0$

Calculate the average elevation speed  $n_{2m\alpha}$

Calculate the relevant output shaft revolutions  $f_\alpha$

Calculate of  $T_{2\alpha, zul}$  see diagramm 3


$$T_{2b, fs} \leq T_{2\alpha, zul}$$

**no** Select a larger gearbox or please consult

**yes**

Calculate the max. output speed  $n_{2max}$  see diagram 1

Calculate the ratio  $i$

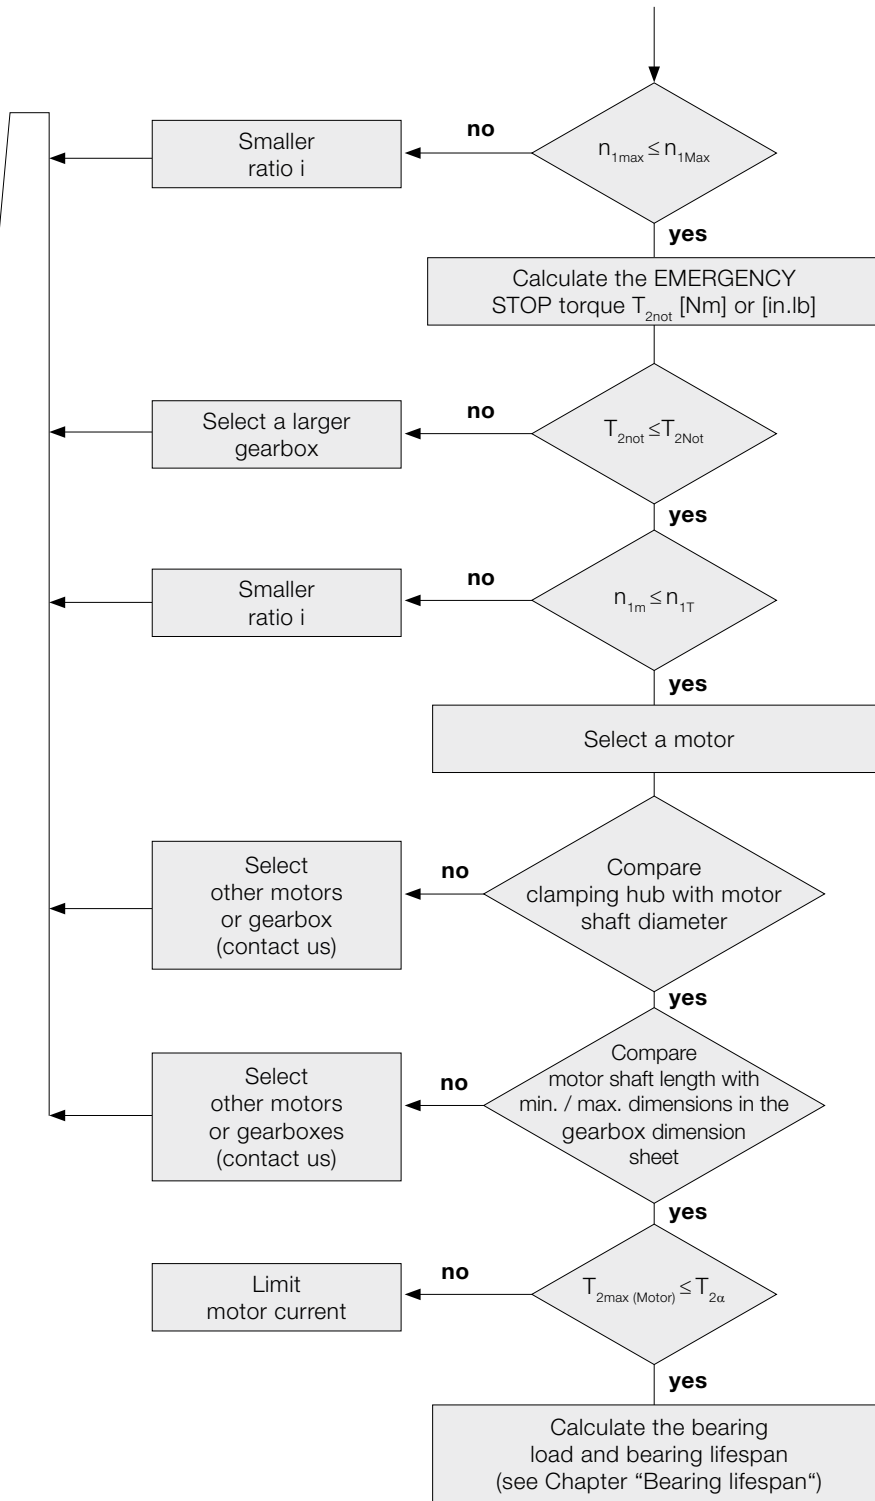

Please refer to the relevant technical data for information on the max. permissible characteristic values for your gearbox.

$T_{2not}$  depends on the application

$$n_{1m} = n_{2m} \cdot i$$

$$D_{W, Mot} \leq D_{clamping\ hub}$$

The motor shaft must be inserted far enough into the clamping hub.

The motor shaft must protrude far enough into the clamping hub without making contact.

$$T_{2max (Motor)} = T_{1max (Motor)} \cdot i \cdot \eta_{gearbox}$$

The gearbox should not be damaged when the motor operates at full load, limit the motor current if necessary.

Diagram 1  
Standard collective load at output. At input speeds up to rated speed  $n_{1N}$  or thermal speed limit  $n_{1T}$ , the temperature of the gearbox will not exceed 90 °C under average ambient conditions.




Diagram 2  
Large number of cycles combined with short acceleration times may cause the drive train to vibrate. Use the shock factor  $f_s$  to include the resulting excess torque values in calculations.



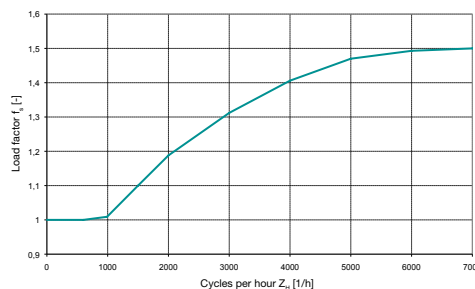


Diagram 3  
The transmittable torque  $T_{2u,per}$  of the gearbox is dependent on the number of output shaft revolutions. In the lower output shaft revolution range, the fatigue strength range of the toothing can be fully utilized up to the maximum value  $T_{2u}$ .

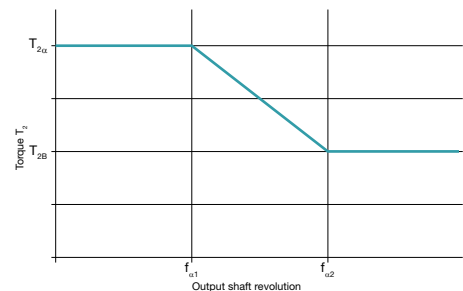

# Gearbox general – Detailed sizing

Bearing lifespan  $L_{h10}$

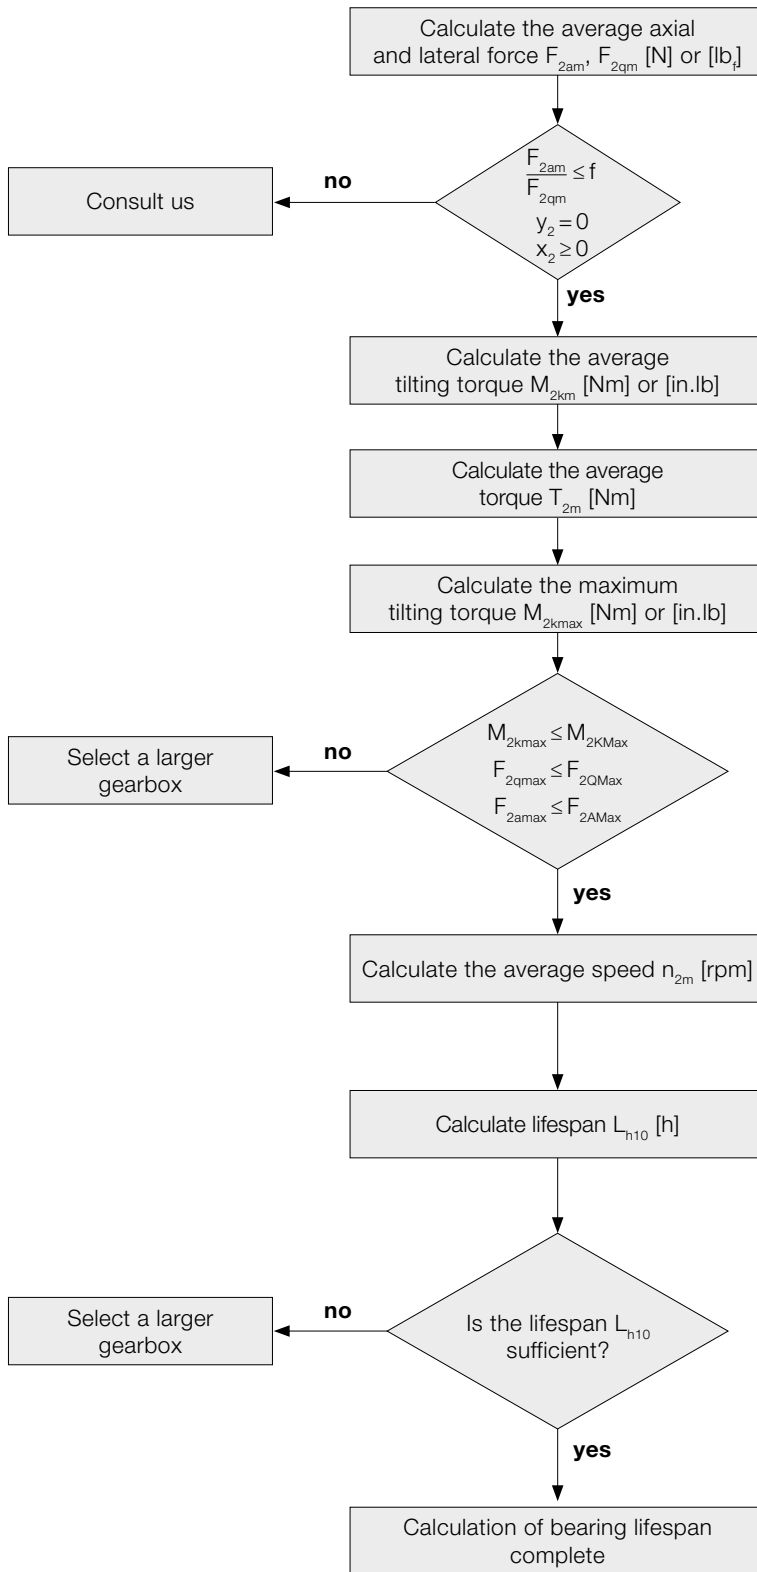

$$F_{2am} = \sqrt[3]{\frac{|n_{2b}| \cdot t_b \cdot |F_{2ab}|^3 + \dots + |n_{2n}| \cdot t_n \cdot |F_{2an}|^3}{|n_{2b}| \cdot t_b + \dots + |n_{2n}| \cdot t_n}}$$

$$F_{2qm} = \sqrt[3]{\frac{|n_{2b}| \cdot t_b \cdot |F_{2qb}|^3 + \dots + |n_{2n}| \cdot t_n \cdot |F_{2qn}|^3}{|n_{2b}| \cdot t_b + \dots + |n_{2n}| \cdot t_n}}$$

$$M_{2km} = \frac{F_{2am} \cdot y_2 + F_{2qm} \cdot (x_2 + z_2)^{a)}}{W}$$

$$T_{2m} = \sqrt[3]{\frac{|n_{2b}| \cdot t_b \cdot |T_{2b}|^3 + \dots + |n_{2n}| \cdot t_n \cdot |T_{2n}|^3}{|n_{2b}| \cdot t_b + \dots + |n_{2n}| \cdot t_n}}$$

$$M_{2kmax} = \frac{F_{2amax} \cdot y_2 + F_{2qmax} \cdot (x_2 + z_2)^{a)}}{W}$$

<sup>a)</sup> x, y, z in mm


$$n_{2m} = \frac{n_{2b} \cdot t_b + \dots + n_{2n} \cdot t_n}{t_b + \dots + t_n}$$

$$L_{h10} = \frac{16666}{n_{2m}} \cdot \left[ \frac{K1_2}{M_{2km}} \right]^{p_2}$$

	metric	inch
W	1000	1

	TP <sup>+</sup> /TPK <sup>+</sup>	SP <sup>+</sup> /SPK <sup>+</sup>
f	0.37	0.40

Example with output shaft and flange:

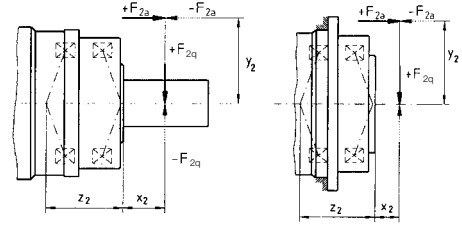

SP <sup>+</sup> /SPK <sup>+</sup> /SPC <sup>+</sup>		060	075	100	140	180	210	240
z <sub>2</sub>	[mm]	42.2	44.8	50.5	63.0	79.2	94.0	99.0
	[in]	1.66	1.76	1.99	2.48	3.12	3.70	3.90
K <sub>1,2</sub>	[Nm]	795	1109	1894	3854	9456	15554	19521
	[in.lb]	7036	9815	16762	34108	83686	137653	172761
p <sub>2</sub>		3.33	3.33	3.33	3.33	3.33	3.33	3.33

TP <sup>+</sup> /TPK <sup>+</sup> / TPC <sup>+</sup> /DP <sup>+</sup>		004	010	025	050	110	300	500	2000	4000
z <sub>2</sub>	[mm]	57.6	82.7	94.5	81.2	106.8	140.6	157	216	283
	[in]	2.27	3.26	3.72	3.20	4.21	5.48	6.12	8.50	11.1
K <sub>1,2</sub>	[Nm]	536	1325	1896	4048	9839	18895	27251	96400	184000
	[in.lb]	4744	11726	16780	35825	87075	167220	241171	853140	1628400
p <sub>2</sub>		3.33	3.33	3.33	3.33	3.33	3.33	3.33	3.33	3.33

HDP <sup>+</sup>		010	025	050
z <sub>2</sub>	[mm]	90.4	99.1	83.5
	[in]	3.56	3.90	3.29
K <sub>1,2</sub>	[Nm]	1325	1896	4048
	[in.lb]	11726	16780	35825
p <sub>2</sub>		3.33	3.33	3.33

TK<sup>+</sup>/SK<sup>+</sup>/HG<sup>+</sup>/SC<sup>+</sup>/VH<sup>+</sup>/VS<sup>+</sup>/VT<sup>+</sup>: Calculation using cymex®.  
Please contact us for further information.

# Hypoid gearboxes – Detailed sizing

Gearbox types and sizes			TK* 004 SK* 060 HG* 060	SPK* 075 TPK* 010 TPK* 025 MA	TK* 010 SK* 075 HG* 075	SPK* 100 TPK* 025 TPK* 050 MA
<b>Dimensions of rearward drive</b>						
Solid shaft:	diameter	$\varnothing D_{kg}$ mm	16	16	22	22
	length	L mm	28 ±0.15	28 ±0.15	36 ±0.15	36 ±0.15
Hollow shaft interface outer diameter		$\varnothing D_{hb}$ mm	18	18	24	24
Hollow shaft interface inner diameter		$\varnothing d_{hb}$ mm	15	15	20	20
Hollow shaft interface length		$L_{hw}$ mm	14	14	16	16
Distance from input axis		A mm	42.9	42.9	52.6	52.6
Key dimensions (E = key as per DIN 6885, sheet 1, form A)	l	mm	25	25	32	32
	$b_{hg}$	mm	5	5	6	6
	a	mm	2	2	2	2
	h	mm	18	18	24.5	24.5
Output shaft threaded bore		B	M5x12.5	M5x12.5	M8x19	M8x19
<b>Permissible load of rearward drive</b>						
Max. acceleration torque <sup>c)</sup>	$T_{3a,zul}$	$= T_{2a,zul}$ on the condition that $T_{2b,fs} + T_{3b,fs} \leq T_{2a,zul}$	Please contact us	$= T_{2a,zul}$ on the condition that $T_{2b,fs} + T_{3b,fs} \leq T_{2a,zul}$	Please contact us	
Nominal output torque <sup>c)</sup>	$T_{3N}$	$= T_{2N} - T_{2n}$		$= T_{2N} - T_{2n}$		
EMERGENCY STOP torque <sup>c)</sup>	$T_{3Not}$	$= T_{2Not} - T_{2not}$		$= T_{2Not} - T_{2not}$		
Max. axial force <sup>b)</sup>	$F_{3Amax}$	1500	1500	1800	1800	
Max. lateral force <sup>b)</sup>	$F_{3Qmax}$	2300	2300	3000	3000	
Max. tilting torque	$M_{3Kmax}$	60	60	100	100	
<b>Calculation of average tilting torque at the rearward drive</b>						
Factor for tilting torque calculation	$z_3$ mm	11.9	11.9	15.6	15.6	
Distance between axial force and center of gearbox	$y_3$ mm	Application-dependent				
Distance between lateral force and shaft collar	$x_3$ mm	Application-dependent				

<sup>a)</sup> Connection via shrink discs


<sup>b)</sup> Refers to center of shaft

<sup>c)</sup> See also page 336, "Detailed dimensioning – Gearbox"



Rearward drive:

Smooth shaft

Shaft with key



$$M_{3K} = F_{3a} \cdot y_3 + F_{3q} \cdot (x_3 + z_3)$$




TK* 025 SK* 100 HG* 100	SPK* 140 TPK* 050 TPK* 110 MA	TK* 050 SK* 140 HG* 140	SPK* 180 SPK* 240 TPK* 110 TPK* 500 TPK* 300 MA	TK* 110 SK* 180 HG* 180	SPK* 210 TPK* 300 TPK* 500 MA
32	32	40	40	55	55
58 ±0.15	58 ±0.15	82 ±0.15	82 ±0.15	82 ±0.15	82 ±0.15
36	36	50	50	68	68
30	30	40	40	55	55
20	20	25	25	25	25
63.5	63.5	87	87	107.8	107.8
50	50	70	70	70	70
10	10	12	12	16	16
4	4	5	5	6	6
35	35	43	43	59	59
M12x28	M12x28	M16x36	M16x36	M20x42	M20x42
$= T_{2\alpha,zul}$ on the condition that $T_{2b,fs} + T_{3b,fs} \leq T_{2\alpha,zul}$	Please contact us	$= T_{2\alpha,zul}$ on the condition that $T_{2b,fs} + T_{3b,fs} \leq T_{2\alpha,zul}$	Please contact us	$= T_{2\alpha,zul}$ on the condition that $T_{2b,fs} + T_{3b,fs} \leq T_{2\alpha,zul}$	Please contact us
$= T_{2N} - T_{2n}$		$= T_{2N} - T_{2n}$		$= T_{2N} - T_{2n}$	
$= T_{2Not} - T_{2not}$		$= T_{2Not} - T_{2not}$		$= T_{2Not} - T_{2not}$	
2000	2000	9900	9900	4000	4000
3300	3300	9500	9500	11500	11500
150	150	580	580	745	745
16.5	16.5	20	20	23.75	23.75
Application-dependent					
Application-dependent					

Hollow shaft interface <sup>a)</sup>

Hollow shaft

Cover



No connection possible

No connection possible



# Worm gearboxes – Detailed sizing

**A:** Simplified sizing for servo motors based on the maximum motor torque:  $M_{max} * i \leq T_{2\alpha}$

**B:** Sizing based on the application

## Step 1:

Determine the application data

$$T_{2b} = \text{_____ [Nm]} \quad n_{1n} = \text{_____ [rpm]}$$

## Step 2:


Determine the operating mode factor  $K_M = \text{_____}$

Typical applications	Cycle	Torque characteristic	Operating mode factor $K_M$
Format changing, e.g. in packaging machines, drives for processing equipment, actuators etc.	<b>S5 operation:</b> Low duty cycle Small number of cycles Low dynamics		1.0
Tool changers with low dynamics, pick & place gantry axes, tire building machines etc.	<b>S5 operation:</b> Medium duty cycle Small number of cycles Medium dynamics		1.6
Linear axes in plasma, laser or water jet cutters, portals, tool changers with high dynamics	<b>S5 operation:</b> Medium duty cycle Medium number of cycles High dynamics		1.9
Roller drives in printing presses, star drives in rackers etc.	<b>S1 operation:</b> High duty cycle		2.2

cymex® 5 also allows sizing calculations for other applications / cycles!

## Step 3:

Determine the sizing factor  $f_a$  with the operating mode factor  $K_M$   $f_a = \text{_____}$

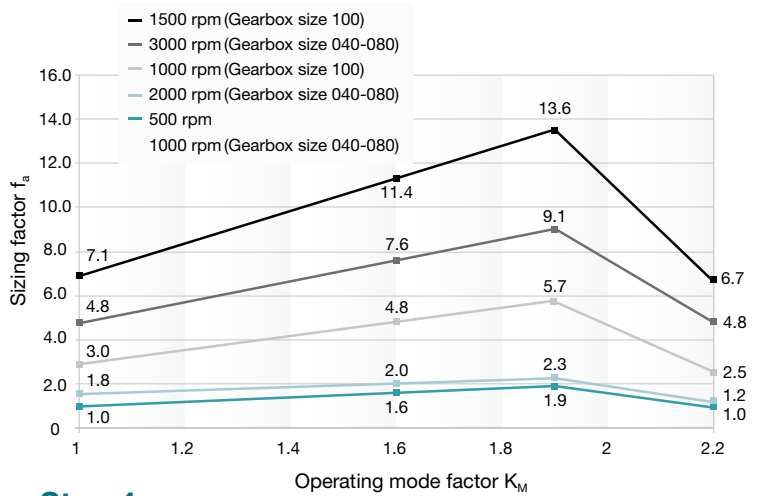

## Step 4:

Compare the equivalent application torque with the maximum gearbox  $T_{2\alpha}$  (see table, Step 5)

$$T_{2eq} = f_a * T_{2b} \leq T_{2\alpha}$$

$$T_{2eq} = \text{_____} * \text{_____} \leq T_{2\alpha}$$

$$T_{2eq} = \text{_____ [Nm]} \leq \text{_____ [Nm]}$$

We recommend using a vent screw for duty cycles  $\geq 60\%$ , longer than 20 min (S1 operation) and  $n1N \geq 3000$  rpm.

## Step 5: Quick selection of the technical data

			V-Drive Advanced				
			040	050	063	080	100
Ratio	i		4 - 400				
Maximum torque <sup>a)</sup> (at $n_1 = 500$ rpm)	$T_{2\alpha}$	Nm	74-106	165-204	319-372	578-785	1184-1505
		in.lb	655-938	1460-1805	2823-3292	5115-6947	10478-13319
Max. input speed	$n_{1max}$	rpm	6000	6000	4500	4000 / 4500 <sup>b)</sup>	3500 / 4000 <sup>b)</sup>
Max. lateral force	$F_{2\alpha Max}$	N	2400	3800	6000	9000	14000
		lb <sub>f</sub>	540	855	1350	2025	3150
Operating noise (with $n_1 = 3000$ rpm no load)	$L_{PA}$	dB(A)	$\leq 54$	$\leq 62$	$\leq 64$	$\leq 66$	$\leq 70$
Max. torsional backlash	$j_t$	arcmin	$\leq 3$	$\leq 3$	$\leq 3$	$\leq 3$	$\leq 3$
Service life (For calculation see "Information")	$L_h$	h	> 20000	> 20000	> 20000	> 20000	> 20000

<sup>a)</sup> The maximum torques depend on the ratio.

<sup>b)</sup> First value for single-stage version, second value for two-stage version.


**Account must be taken of the lateral and axial forces at the output:**

Please also carry out steps 6 and 7 if forces are present at the output (e.g. if timing belt pulleys, pinions or levers are mounted there).

**Step 6 (if external forces are present):**

Determine the forces acting on the output and check the boundary conditions

- Lateral force  $F_{2q} = \underline{\hspace{2cm}}$  [N]
- Lateral force distance  $x_2 = \underline{\hspace{2cm}}$  [mm]
- Axial force  $F_{2a} = \underline{\hspace{2cm}}$  [N]
- Axial force distance  $y_2 = \underline{\hspace{2cm}}$  [mm]
- (required if  $F_{2a}$  is present)

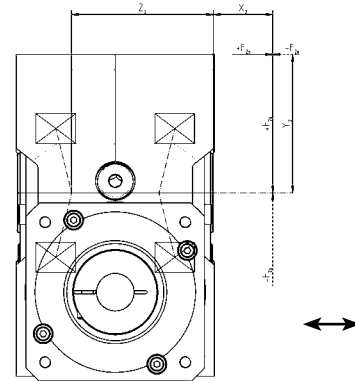

**Conditions if axial force  $F_{2a}$  is present:**

- 1.  $F_{2a} \leq 0.25 * F_{2q} \Rightarrow (\underline{\hspace{2cm}} \leq 0.25 * \underline{\hspace{2cm}})$   Met  Not met: Sizing with cymex® 5
- 2.  $y_2 \leq x_2 \Rightarrow (\underline{\hspace{2cm}} \leq \underline{\hspace{2cm}})$   Met  Not met: Sizing with cymex® 5


**Step 7:**

Determine the maximum equivalent force acting on the output  $F_{2,eq}$

$F_{2,eq} = F_{2q} + 0.25 * F_{2a} \leq F_{2QMax}$  ( $F_{2QMax}$  can be determined from the diagram below)

$F_{2,eq} = \underline{\hspace{2cm}} + 0.25 * \underline{\hspace{2cm}} \leq \underline{\hspace{2cm}}$

$F_{2,eq} = \underline{\hspace{2cm}}$  [N]  $\leq$   $\underline{\hspace{2cm}}$  [N]  Met  Not met: Sizing with cymex® 5

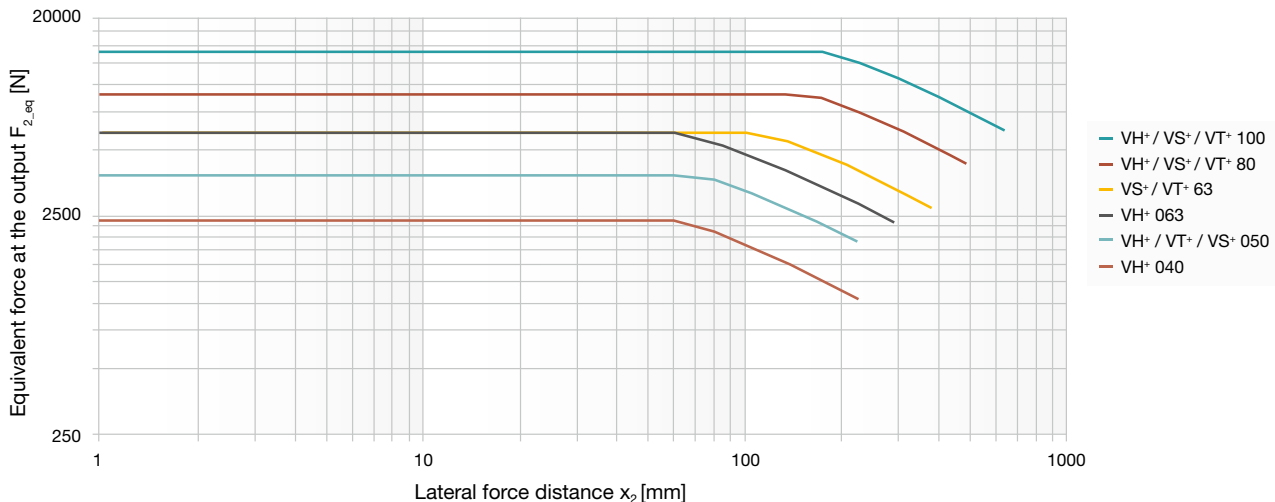

# Glossary – the alphabet

## Adapter plate

WITTENSTEIN alpha uses a system of standardized adapter plates to connect the motor and the gearbox, making it possible to mount a WITTENSTEIN alpha gearbox to any desired motor without difficulty.

## Angular minute

A degree is subdivided into 60 angular minutes (= 60 arcmin = 60').

Example:

If the torsional backlash is  $j_t = 1$  arcmin, the output can be turned  $1/60^\circ$ . The repercussions for the application are determined by the arc length:

$$b = 2 \cdot \pi \cdot r \cdot \alpha^\circ / 360^\circ$$


Example:

A pinion with a radius  $r = 50$  mm mounted on a gearbox with torsional backlash  $j_t = 3$  arcmin can be turned  $b = 0.04$  mm.

## Axial force ( $F_{2AMax}$ )


The axial force acting on a gearbox runs parallel to its output shaft or perpendicular to its output shaft. It may be applied with axial offset via a lever arm  $y_2$  under certain circumstances, in which case it also generates a bending moment. If the axial force exceeds the permissible catalog values (max. axial force  $F_{2AMax}$ ), additional design features (e.g. axial bearings) must be implemented to absorb these forces.

Example with output shaft and flange:

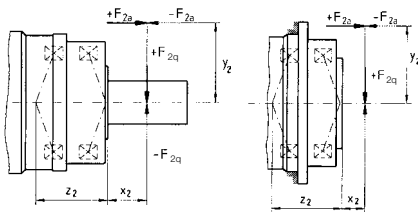

## Bushing

If the motor shaft diameter is smaller than the → **clamping hub**, a bushing is used to compensate the difference in diameter. The bushing must have a minimum thickness of 1 mm and a motor shaft diameter of 2 mm.

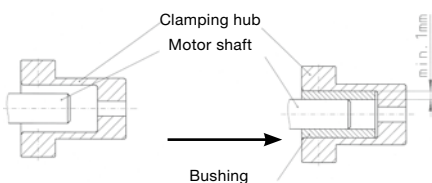

## CAD POINT

Performance data, dimension sheets and CAD data for all types of gearbox can be found online in our CAD POINT together with comprehensive documentation of the selection. ([www.wittenstein-cad-point.com](http://www.wittenstein-cad-point.com))

## Clamping hub

The clamping hub ensures a frictional connection between the motor shaft and gearbox. A → **bushing** is used as the connecting element if the motor shaft diameter is smaller than that of the clamping hub. Optionally, a positive connection via a parallel key is also possible.

## Continuous operation (S1)

Continuous operation is defined by the → **duty cycle**. If the duty cycle is greater than 60 % and / or longer than 20 minutes, this qualifies as continuous operation. → **Operating modes**

## Cyclic operation (S5)

Cyclic operation is defined via the → **duty cycle**. If the duty cycle is less than 60 % and shorter than 20 minutes, it qualifies as cyclic operation (→ **operating modes**).

## cymex®

cymex® is the calculation software developed by our company for dimensioning complete drive trains. The software enables the precise simulation of motion and load variables. The software is available for download from our website ([www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)). We can also provide training to enable you to make full use of all the possibilities provided by the software.

## Degree of protection (IP)

The various degrees of protection are defined in DIN EN 60529 "Degrees of protection offered by enclosure (IP code)". The IP degree of protection (International Protection) is represented by two digits. The first digit indicates the protection against the ingress of impurities and the second the protection against the ingress of water.

Example:

**IP65**

Protection against the ingress of dust (dust-proof)

Protection against spray water

## Duty cycle (DC)

The cycle determines the duty cycle DC. The times for acceleration ( $t_b$ ), constant travel if applicable ( $t_c$ ) and deceleration ( $t_d$ ) combined yield the duty cycle in minutes. The duty cycle is expressed as a percentage with inclusion of the pause time  $t_e$ .

$$DC [\%] = \frac{t_b + t_c + t_d}{t_b + t_c + t_d + t_e} \cdot 100 \frac{\text{Motion duration}}{\text{Cycle duration}}$$

$$DC [\text{min}] = t_b + t_c + t_d$$


## Emergency stop torque ( $T_{2Not}$ )

The Emergency stop torque  $T_{2Not}$  is the maximum permissible torque at the gearbox output and must not be reached more than 1000 times during the life of the gearbox. It must never be exceeded!

## Efficiency ( $\eta$ )

Efficiency [%]  $\eta$  is the ratio of output power to input power. Power lost through friction reduces efficiency to less than 1 or 100 %.

$$\eta = P_{\text{off}} / P_{\text{on}} = (P_{\text{on}} - P_{\text{loss}}) / P_{\text{on}}$$

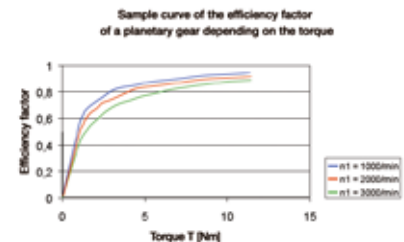

WITTENSTEIN alpha always measures the efficiency of a gearbox during operation at full load. If the input power or torque are lower, the efficiency rating is also lower due to the constant no-load torque. Power losses do not increase as a result. A lower efficiency is also expected at high speeds (see illustration).



## Ex symbol

Devices bearing the Ex symbol comply with EU Directive 94 / 9 / EC (ATEX) and are approved for use in defined explosion-hazardous zones.

Detailed information on explosion groups and categories, as well as further information on the relevant gearbox are available upon request.

## Food-grade lubrication (F)

These products are designed with food-grade lubrication and can therefore be used in the food industry. Note the reduced torques compared to the standard products. (V-Drive excluded). The exact torques can be found in cymex® 5 or CAD POINT.

## HIGH SPEED (MC)


The HIGH SPEED version of our gearbox has been specially developed for applications in continuous operation at high input speeds, e.g. as found in the printing and packaging industries.

## HIGH TORQUE (MA)

WITTENSTEIN alpha gearboxes are also available in a HIGH TORQUE version. These gearboxes are particularly suited to applications requiring extremely high torques and maximum stiffness.

## Hysteresis curve

The hysteresis is measured to determine the torsional rigidity of a gearbox. The result of this measurement is known as the hysteresis curve.

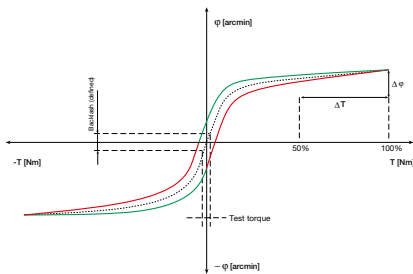

If the input shaft is locked, the gearbox is continuously loaded and relieved at the output in both directions up to a defined torque. The torsional angle is plotted against the torque. This yields a closed curve from which the → **torsional backlash** and → **torsional rigidity** can be calculated.

## Jerk (j)

Jerk is derived from acceleration and is defined as the change in acceleration within a unit of time. The term impact is used if the acceleration curve changes abruptly and the jerk is infinitely large.

## Lateral force ( $F_{2QM_{max}}$ )

The max. lateral force  $F_{2QM_{max}}$  [N] is the force component acting at right angles to the output shaft or parallel to the output flange. It acts perpendicular to the → axial force and can assume an axial distance of  $x_2$  in relation to the shaft nut or shaft flange, which acts as a lever arm. The lateral force produces a bending moment (see also → axial force).

## Mass inertia ratio ( $\lambda = \text{Lambda}$ )

The mass inertia ratio  $\lambda$  is the ratio of external inertia (application side) to internal inertia (motor and gearbox side). It is an important parameter determining the controllability of an application. Accurate control of dynamic processes becomes more difficult with differing mass moments of inertia and as  $\lambda$  becomes greater. WITTENSTEIN alpha recommends that a guideline value of  $\lambda < 5$  is maintained. A gearbox reduces the external mass moment of inertia by a factor of  $1/i^2$ .

$$\lambda = \frac{J_{\text{extern}}}{J_{\text{intern}}}$$

$J$  reduced externally at input:

$$J'_{\text{external}} = J_{\text{external}} / i^2$$

Simple applications  $\leq 10$

Dynamic applications  $\leq 5$

Highly dynamic applications  $\leq 1$

## Mass moment of inertia (J)

The mass moment of inertia  $J$  [kg/cm<sup>2</sup>] is a measurement of the effort applied by an object to maintain its momentary condition (at rest or moving).

## Mesh frequency ( $f_z$ )

The mesh frequency may cause problems regarding vibrations in an application, especially if the excitation frequency corresponds to an intrinsic frequency of the application. The mesh frequency can be calculated for planetary gearboxes from WITTENSTEIN alpha (exception: gearboxes with ratio  $i = 8$ ) using the formula  $f_z = 1.8 \cdot n_2$  [rpm] and on planetary gearboxes from WITTENSTEIN alpha, is independent of the ratio. If it does indeed become problematic, the intrinsic frequency of the system can be changed or another gearbox (e.g. hypoid gearbox) with a different mesh frequency can be selected.

## No-load running torque ( $T_{012}$ )

The no-load running torque  $T_{012}$  is the torque which must be applied to a gearbox in order to overcome the internal friction; it is therefore considered lost torque. The values specified in the catalog are calculated by WITTENSTEIN alpha at a speed of  $n_1 = 3000$  rpm and an ambient temperature of 20 °C.

$$T_{012}: \begin{matrix} 0 & 1 \rightarrow 2 \\ \text{without} & \text{from input side towards} \\ \text{load} & \text{output side} \end{matrix}$$

Idling torques decrease during operation.

## NSF

Lubricants certified as grade H1 by the NSF (National Sanitation Foundation) can be used in the food sector where occasional unavoidable contact with food cannot be excluded.

## Operating modes

(continuous operation **S1** and cyclic operation **S5**)

Gearboxes are selected depending on whether the motion profile is characterized by frequent acceleration and deceleration phases in → **cyclic operation** (S5) as well as pauses, or whether it is designed for → **continuous operation** (S1), i.e. with long phases of constant motion.

## Operating noise ( $L_{PA}$ )

The gear ratio and speed affect the noise level. As a general rule: A higher speed means a higher noise level, while a higher ratio means a lower noise level. The values specified in our catalog are based on a reference ratio and speed. The reference speed is either  $n_1 = 3000$  rpm or  $n_1 = 2000$  rpm depending on the size of the gearbox. You can find ratio-specific values in cymex® – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com).

## Output shaft revolution ( $f_a$ )

Factor  $f_a$  determines the number of life time cycles for the required gearbox service life. It describes the number of revolutions at the output used to assess the torque permitted at the output.

→ Refer to this term for further details.

# Glossary – the **alphabet**

## Positioning accuracy

The positioning accuracy is determined by the angular deviation from a setpoint and equals the sum of the torsional angles due to load → **(torsional rigidity and torsional backlash)** and kinetics → **(synchronization error) occurring simultaneously in practise** .

## Quality control

All Premium and Advanced gearboxes are subject to a final inspection before they leave the WITTENSTEIN alpha factory to ensure that they are all delivered within specification.

## Ratio (i)

The gear ratio  $i$  indicates the factor by which the gearbox transforms the three relevant parameters of motion (speed, torque and mass moment of inertia). The factor is a result of the geometry of the gearing elements (Example:  $i = 10$ ).

$$\begin{array}{lcl}
 n_1 = 3000 \text{ min}^{-1} & \begin{array}{c} :i \\ \cdot i \end{array} & \begin{array}{l} T_2 = 200 \text{ Nm} \\ n_2 = 300 \text{ min}^{-1} \end{array} \\
 T_1 = 20 \text{ Nm} & & \\
 J_1 = 0,10 \text{ kgm}^2 & \longleftarrow & J_2 = 10 \text{ kgm}^2 \\
 & & \text{(Application)}
 \end{array}$$

## Safety note

For applications with special safety requirements (e.g. vertical axes, clamped drives), we recommend exclusive use of our Premium and Advanced products (excluding V-Drive).


## SIZING ASSISTANT

The online SIZING ASSISTANT from WITTENSTEIN alpha allows the efficient selection of a gearbox in seconds. You can use various motor or application entry options to select the right gearbox for your application in seconds ([www.sizing-assistant.com](http://www.sizing-assistant.com)).

## Speed (n)

Two speeds are of relevance when dimensioning a gearbox: the maximum speed and the thermal speed limit at the input. The maximum permissible speed  $n_{1Max}$  must not be exceeded because it serves as the basis for dimensioning → **cyclic operation**. The nominal speed  $n_{1N}$  must not be exceeded in → **continuous operation**. The thermal speed limit  $n_{1T}$  at an ambient temperature of 20° C, is determined by the maximum

gearbox temperature of  $T = 90^\circ \text{ C}$  at no-load. As can be seen in the diagram below, the temperature limit is reached more quickly in the presence of an elevated outside temperature. In other words: the nominal input speed must be reduced if the ambient temperature is high. The values applicable to your gearbox are available from WITTENSTEIN alpha on request.

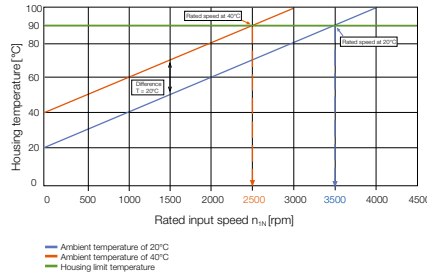

## Delivery of speedline®

If necessary, you can receive delivery of standard series in 24 or 48 hours ex works. Outstanding flexibility for fast deliveries at short notice

## Synchronization

Synchronization refers to the measurable speed variation between the input and output during one revolution of the output shaft. It is caused by manufacturing tolerances and causes minute angular deviations and ratio fluctuations.

## Technical data

You can download further technical data relating to the entire product portfolio from our website

## Tilting rigidity

The tilting rigidity  $C_{2K}$  [Nm/arcmin] of the gearbox consists of the bending stiffness of the output or pinion shaft and the stiffness of the output bearing. It is defined as the quotient of tilting moment  $M_{2K}$  [Nm] and tilting angle  $\Phi$  [arcmin]


$$C_{2K} = M_{2K} / \Phi.$$

## Tilting torque ( $M_{2K}$ )

The tilting torque  $M_{2K}$  is a result of the → **axial and lateral forces** applied and their respective points of application in relation to the inner radial bearing on the output side.

## Torsional backlash (j<sub>t</sub>)

Torsional backlash  $j_t$  [arcmin] is the maximum angle of torsion of the output shaft in relation to the input. Simply put, the torsional backlash represents the gap between two tooth flanks.

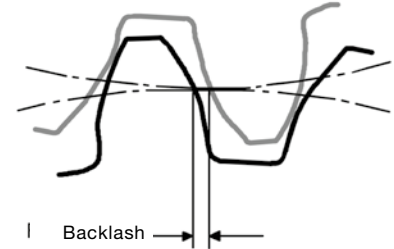


Torsional backlash is measured with the input shaft locked.

The output is then loaded with a defined test torque in order to overcome the internal gearbox friction. The main factor affecting torsional backlash is the face clearance between the gear teeth. The low torsional backlash of WITTENSTEIN alpha gearboxes is due to their high manufacturing accuracy and the specific combination of gear wheels.

## Torsional rigidity ( $C_{t21}$ )

Torsional rigidity [Nm/arcmin]  $C_{t21}$  is defined as the quotient of applied torque and resulting torsion angle ( $C_{t21} = \Delta T / \Delta \Phi$ ). It shows the torque required to turn the output shaft by one angular minute. The torsional rigidity can be determined from the → **hysteresis curve**.

Torsional rigidity  $C$ , angle of torsion  $\Phi$

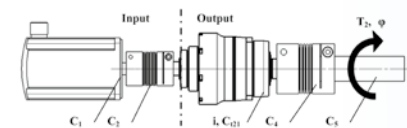

Reduce all torsional rigidity values at the output:

$$C_{(n),out} = C_{(n),in} * i^2$$

with  $i$  = Gearbox ratio [ - ]

$C_{(n)}$  = Individual rigidity values [Nm/arcmin]

→ Refer to this term for further details.

Note: The torsional rigidity  $C_{t21}$  for the gearbox always relates to the output.

Series connection of torsional rigidity values

$$1/C_{\text{tot}} = 1/C_{1,\text{out}} + 1/C_{2,\text{out}} + \dots + 1/C_{(n)}$$

Angle of torsion  $\Phi$  [arcmin]

$$\Phi = T_2 * 1/C_{\text{tot}}$$

with  $T_2$  = output torque [Nm]

### **Torque (M)**

The torque is the actual driving force of a rotary motion. The force and lever arm combine to produce the torque that acts around the axis of rotation.  $M = F \cdot l$

### **Torque ( $T_{2\alpha}$ )**

$T_{2\alpha}$  represents the maximum torque transmitted by the gearbox. This value may decrease depending on the application-specific conditions and the precise evaluation of the movement profile.



# Glossary – Formulae

## Formulae

<b>Torque [Nm]</b>	$T = J \cdot \alpha$	$J$ = Mass moment of inertia [kgm <sup>2</sup> ] $\alpha$ = Angular acceleration [1/s <sup>2</sup> ]
<b>Torque [Nm]</b>	$T = F \cdot l$	$F$ = Force [N] $l$ = Lever, length [m]
<b>Acceleration force [N]</b>	$F_b = m \cdot a$	$m$ = Mass [kg] $a$ = Linear acceleration [m/s <sup>2</sup> ]
<b>Frictional force [N]</b>	$F_{\text{Reib}} = m \cdot g \cdot \mu$	$g$ = Acceleration due to gravity 9.81 m/s <sup>2</sup> $\mu$ = Coefficient of friction
<b>Angular speed [1/s]</b>	$\omega = 2 \cdot \pi \cdot n / 60$	$n$ = Speed [rpm] $\pi$ = PI = 3.14...
<b>Linear speed [m/s]</b>	$v = \omega \cdot r$	$v$ = Linear speed [m/s] $r$ = Radius [m]
<b>Linear speed [m/s] (spindle)</b>	$v_{\text{sp}} = \omega \cdot h / (2 \cdot \pi)$	$h$ = Screw pitch [m]
<b>Linear acceleration [m/s<sup>2</sup>]</b>	$a = v / t_b$	$t_b$ = Acceleration time [s]
<b>Angular acceleration [1/s<sup>2</sup>]</b>	$\alpha = \omega / t_b$	
<b>Pinion path [mm]</b>	$s = m_n \cdot z \cdot \pi / \cos \beta$	$m_n$ = Normal module [mm] $z$ = Number of teeth [-] $\beta$ = Helix angle [°]

## Conversion table

<b>1 mm</b>	= 0.039 in
<b>1 Nm</b>	= 8.85 in.lb
<b>1 kgcm<sup>2</sup></b>	= 8.85 x 10 <sup>-4</sup> in.lb.s <sup>2</sup>
<b>1 N</b>	= 0.225 lb <sub>f</sub>
<b>1 kg</b>	= 2.21 lb <sub>m</sub>

## Symbol


Symbol	Unit	Designation
$C$	Nm/arcmin	Stiffness
$ED$	%, min	Duty cycle
$F$	N	Force
$f_s$	–	Load factor
$f_e$	–	Factor for duty cycle
$i$	–	Ratio
$j$	arcmin	Backlash
$J$	kgm <sup>2</sup>	Mass moment of inertia
$K1$	Nm	Factor for bearing calculation
$L$	h	Service life
$L_{PA}$	dB(A)	Operating noise
$m$	kg	Mass
$M$	Nm	Torque
$n$	rpm	Speed
$p$	–	Exponent for bearing calculation
$\eta$	%	Efficiency
$t$	s	Time
$T$	Nm	Torque
$v$	m/min	Linear speed
$z$	1/h	Number of cycles

## Index

Index	Designation
Capital letter	Permissible values
Small letter	Actual values
1	Input
2	Output
A/a	Axial
B/b	Acceleration
c	Constant
d	Deceleration
e	Pause
h	Hours
K/k	Tilting
m	Mean
Max/max	Maximum
Mot	Motor
N	Nominal
Not/not	Emergency stop
0	No load
Q/q	Lateral
t	Torsional
T	Tangential




# Ordering code – Planetary gearbox

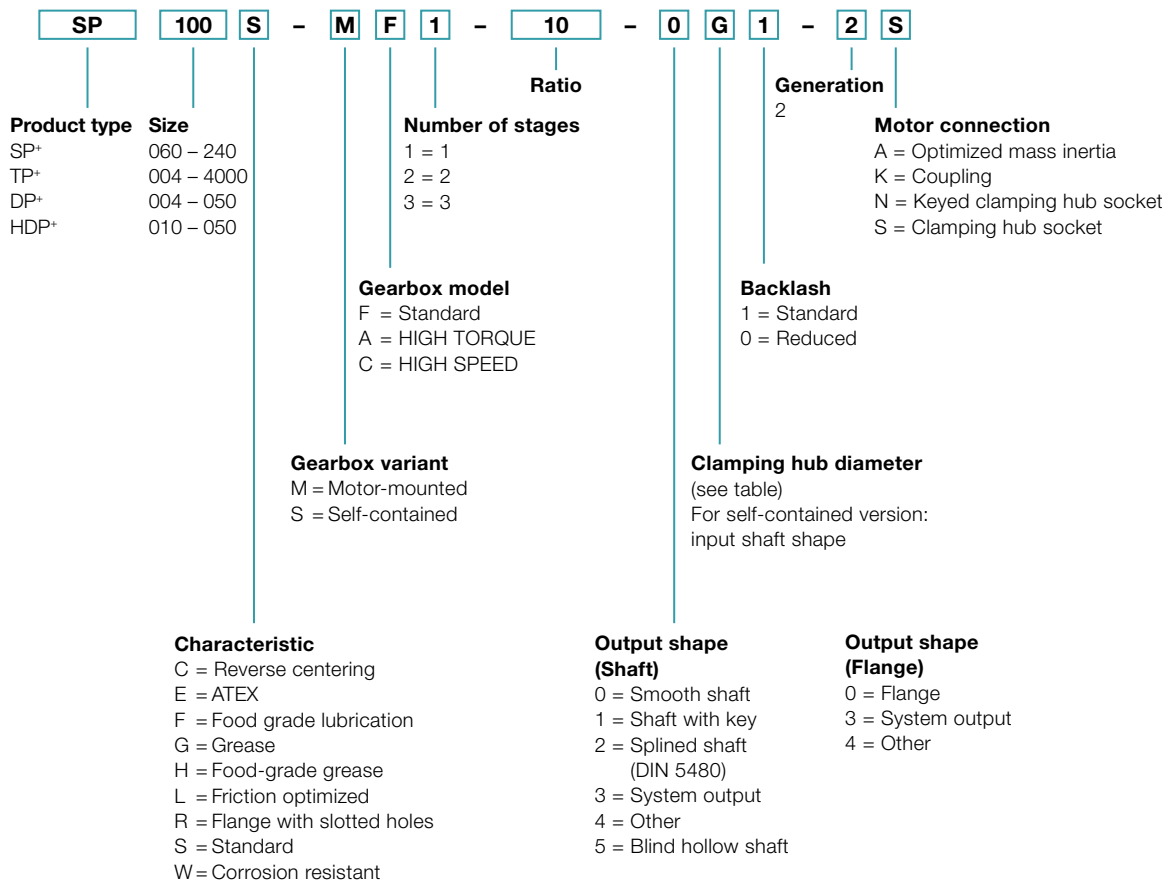


# Mounting positions and clamping hub diameters

Clamping hub diameter  
(see technical data sheet for possible diameters)


B5  
Horizontal




V1  
Output vertical downwards



V3  
Output vertical upwards



S  
Can be tilted  $\pm 90^\circ$   
from a horizontal position



Code letter	mm	Code letter	mm
B	11	I	32
C	14	K	38
E	19	M	48
G	24	N	55
H	28	O	60

Intermediate sizes possible using bushings with a minimum thickness of 1 mm.

**For information purposes only – not required when placing orders!**

**Exceptions:**

- The mounting position of TP+ 2000 / 4000 must be specified.
- DP+ / HDP+ products are designed for mounting position B5 as standard!

If the mounting position is different, contact WITTENSTEIN alpha without fail.

# Ordering code – Hypoid- / Bevel gearboxes

**SPK<sup>+</sup> 100 S - M F 2 - 50 - 0 E 1 - 1 K 0 1**



<b>Product type</b>	<b>Size</b>		<b>Ratio</b>	<b>Generation</b> 1	
SK <sup>+</sup>	060 – 180				
SPK <sup>+</sup>	075 – 240				
SC <sup>+</sup>	060 – 180				
SPC <sup>+</sup>	060 – 180				
HG <sup>+</sup>	060 – 180				
TK <sup>+</sup>	004 – 110				
TPK <sup>+</sup>	010 – 4000				
TPC <sup>+</sup>	004 – 180				
		<b>Number of stages</b>			<b>Number of output stages</b>
		1 = 1			0 = 0
		2 = 2			1 = 1
		3 = 3			2 = 2
		4 = 4			
		<b>Gearbox model</b>		<b>Backlash</b>	<b>Number of input stages</b>
		F = Standard		1 = Standard	0 = 0
		A = HIGH TORQUE		0 = Reduced	1 = 1
		<b>Gearbox variant</b>		<b>Clamping hub diameter</b>	<b>Motor connection</b>
		M = Motor-mounted		(see table)	K = Coupling
					S = Clamping hub socket
	<b>Characteristic</b>		<b>Output shape (Shaft)</b>	<b>Output shape (Flange)</b>	<b>Output shape (Hollow shaft)</b>
	B = Modular output combination		0 = Smooth shaft	0 = Flange	5 = Hollow shaft interface / Hollow shaft
	E = ATEX		1 = Shaft with key	3 = System output	6 = Hollow shaft interface / Hollow shaft interface
	F = Food grade lubrication		2 = Splined shaft (DIN 5480)	4 = Other	
	S = Standard		3 = System output	5 = Flanged hollow shaft	
	W = Corrosion resistant		4 = Other		
			5 = Blind hollow shaft		

## Mounting positions


B5 / V3  
Output horizontal/  
motor shaft vertical upwards



B5 / V1  
Output horizontal/  
motor shaft vertical downwards



V1 / B5  
Output vertical downwards/  
motor shaft horizontal



V3 / B5  
Output vertical upwards/  
motor shaft horizontal


B5 / B5  
Output horizontal/  
motor shaft horizontal

**Please note the orientation when placing your order.**

**Exceptions:**

- The mounting position of TPK<sup>+</sup> 2000 / 4000 must be specified.
- If the mounting position is different, contact WITTENSTEIN alpha without fail.

# Characteristic: Modular output combination (B)

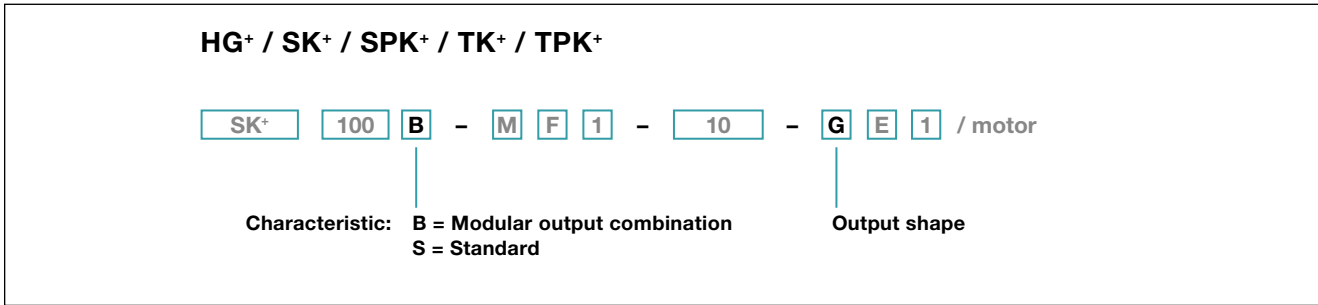


When selecting an output combination from the modular system, please select the letter „B“ as the characteristic in the ordering code. The digit for the required output shape is the modular matrix system.

Example: If you opt for an SK+ with a smooth shaft and require an additional output in the form of a shaft with key, then select the letter „G“ and enter in the order key under „Output shape“.

		Backward					
		Output shape					
Front							
		Smooth shaft	Shaft with key	Hollow shaft interface	Hollow shaft	Cover	
SK+ / SPK+	 Smooth shaft	<b>D</b>	<b>G</b>	<b>A</b>	-	<b>0*</b>	
	 Shaft with key	<b>E</b>	<b>H</b>	<b>B</b>	-	<b>1*</b>	
	 Splined shaft (DIN 5480)	<b>F</b>	<b>I</b>	<b>C</b>	-	<b>2*</b>	
SPK+	 Blind hollow shaft	<b>O</b>	<b>P</b>	<b>N</b>	-	<b>5*</b>	
TK+	 Flanged hollow shaft	<b>D</b>	<b>G</b>	<b>6</b>	<b>5*</b>	<b>0</b>	
TPK+	 Flange	<b>D</b>	<b>G</b>	<b>6</b>	-	<b>0*</b>	
HG+	 Hollow shaft	<b>D</b>	<b>G</b>	<b>6*</b>	<b>5*</b>	<b>0</b>	

\* Standard version: please specify characteristic „S“ in the order code


# Ordering code – Worm gearboxes

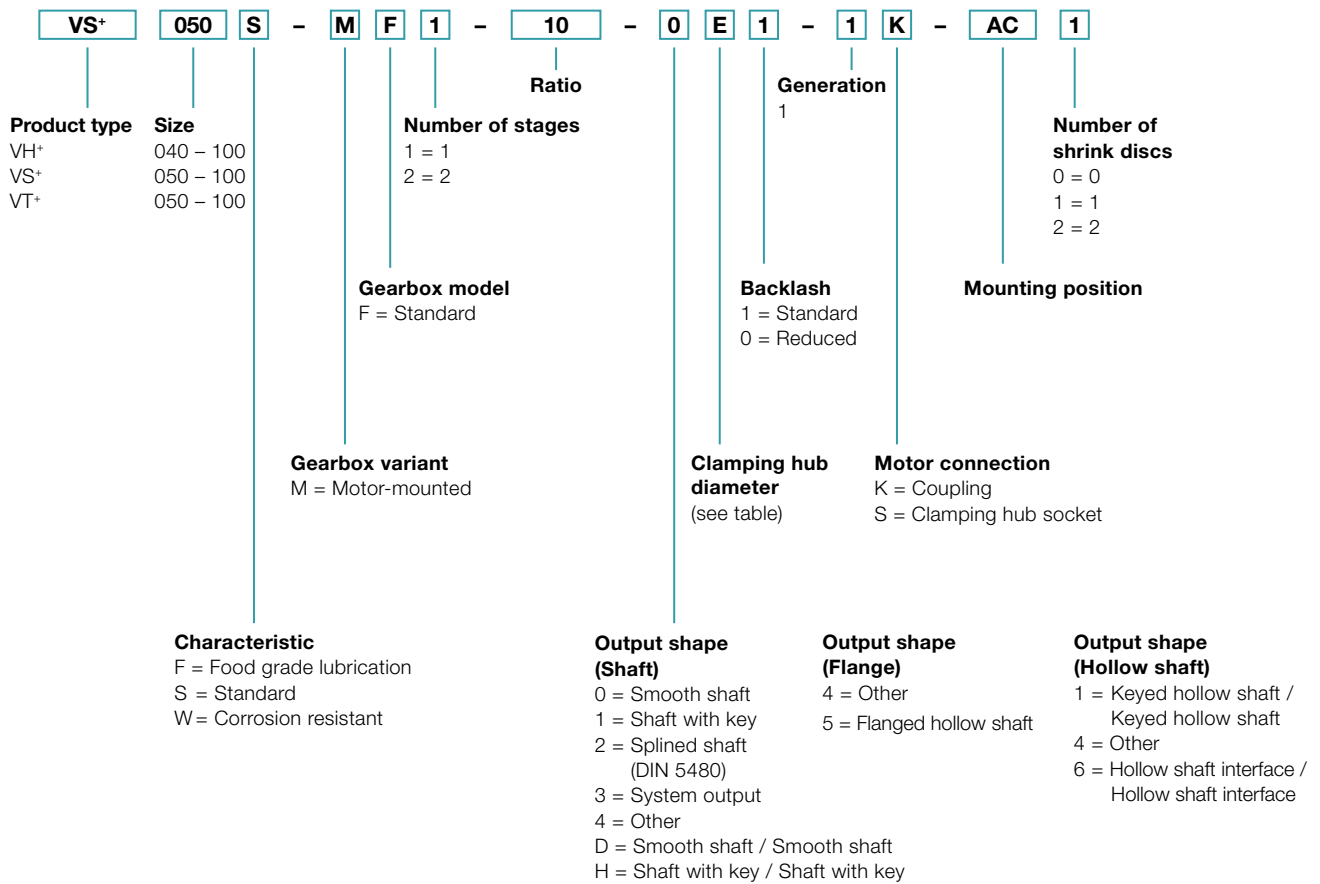


# Mounting positions and clamping hub diameters

Mounting position (only relevant for oil volume)

Output side A:  
View of motor interface,  
Output left  
Only valid for VS<sup>+</sup>, VT<sup>+</sup>

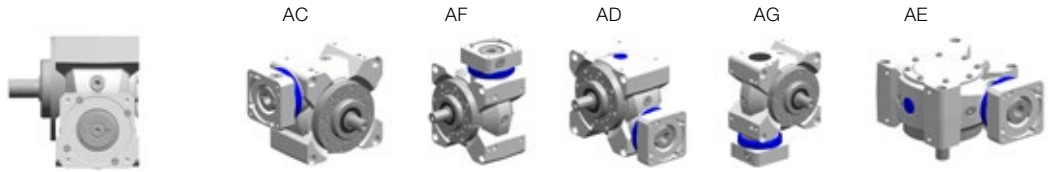

Output side B:  
View of motor interface,  
Output right  
Only valid for VS<sup>+</sup>, VT<sup>+</sup>

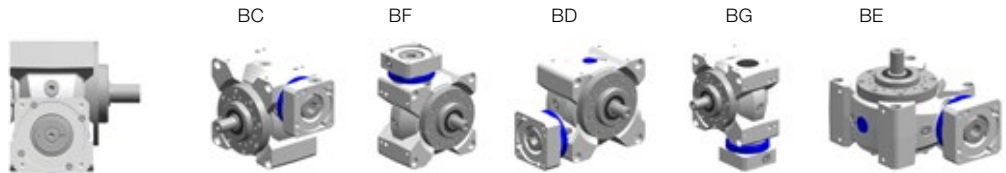

**For VH<sup>+</sup> and VS<sup>+</sup> with dual-shaft output or hollow shaft, A and B in the mounting position must be replaced with 0 (zero).**


## Clamping hub diameter


(see technical data sheet for possible diameters)

Code letter	mm	Code letter	mm
B	11	I	32
C	14	K	38
E	19	M	48
G	24	N	55
H	28	O	60

Intermediate diameters possible in combination with a bushing with a minimum thickness of 1 mm.

# YOUR NOTE

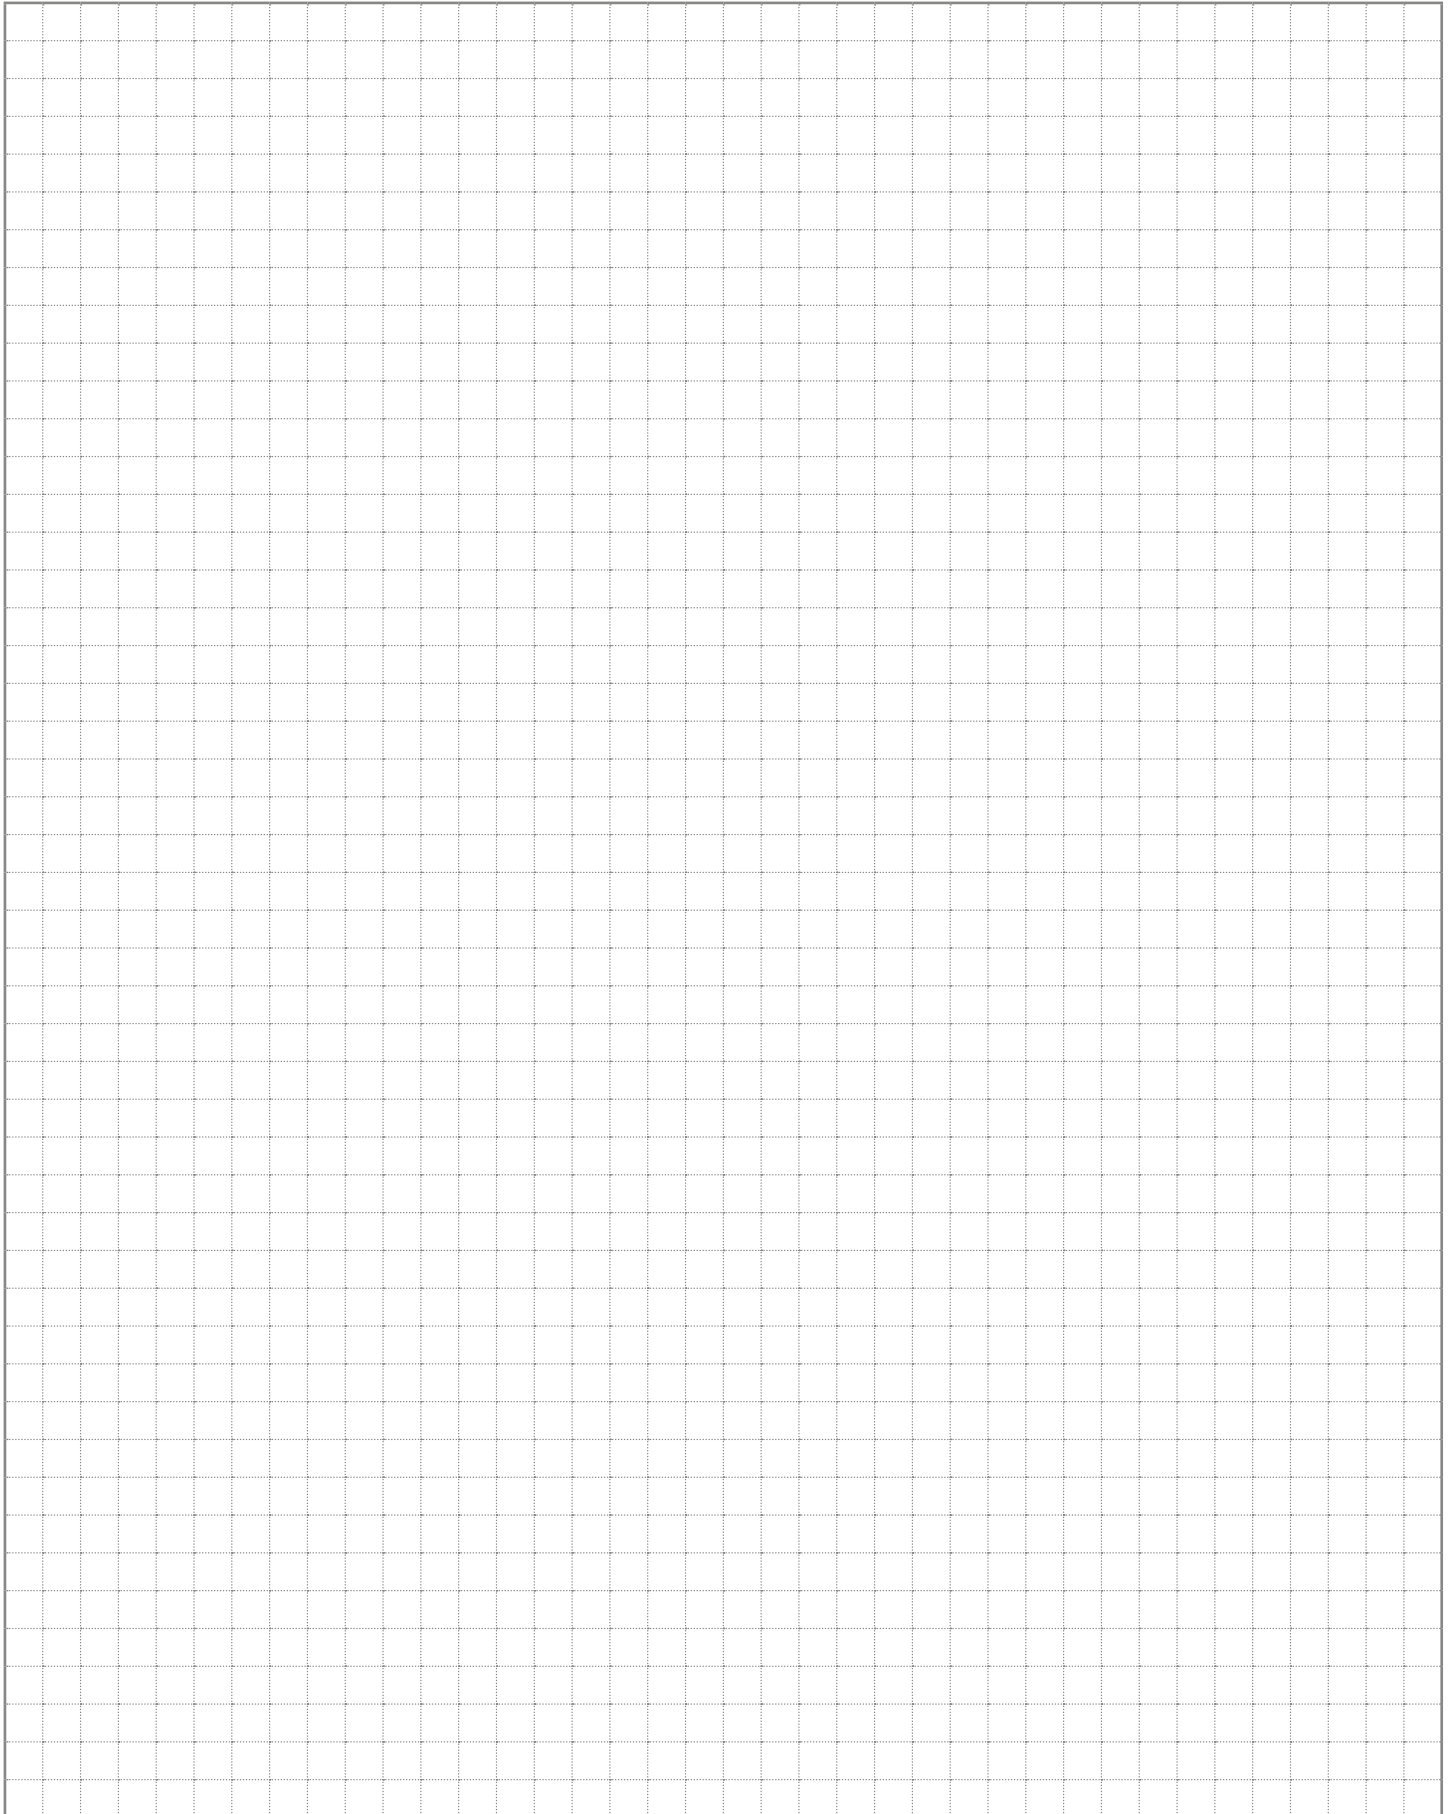

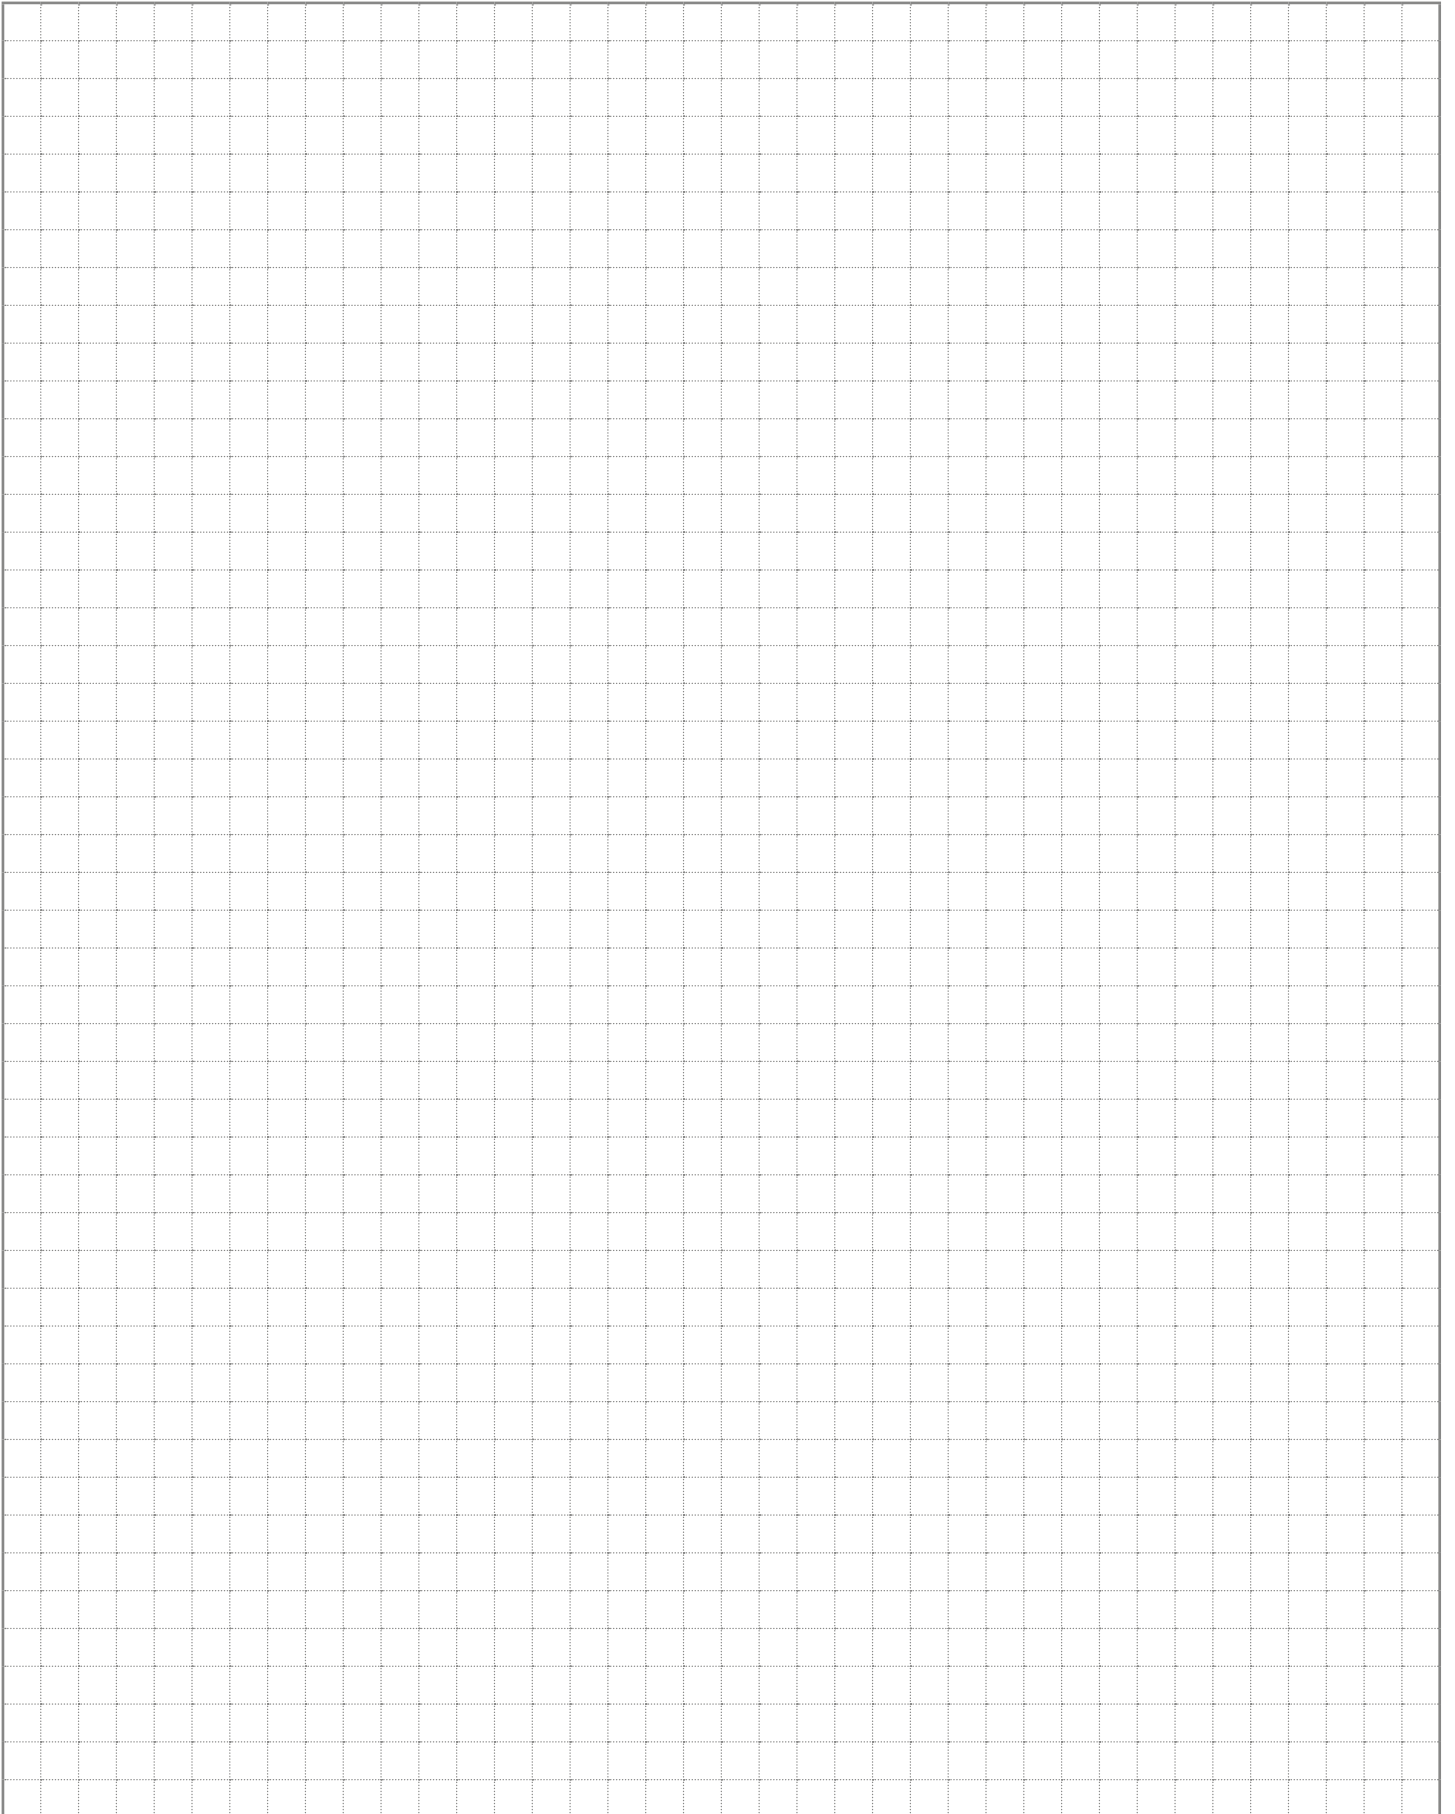





alpha

WITTENSTEIN alpha GmbH  
Walter-Wittenstein-Straße 1  
97999 Igersheim  
Germany

Tel. +49 7931 493-0  
24h-Service-Hotline: Tel. +49 7931 493-12900  
speedline®: Tel. +49 7931 493-10444  
info@wittenstein-alpha.com

Subject to technical changes. alpha Advanced Line

## WITTENSTEIN alpha – **Intelligent** drive systems

[www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

The entire world of drive technology – Catalogs available on request or online at [www.wittenstein-alpha.com/catalogs](http://www.wittenstein-alpha.com/catalogs)



**alpha Advanced Line.** Maximum power density and outstanding positioning accuracy for complex applications.



**alpha Basic / Value Line.** Reliable, flexible and economical solutions for a wide range of applications.



**alpha Linear Systems.** Precise, dynamic system solutions for every requirement.



**alpha Mechatronic Systems.** Energy-efficient, versatile and flexible mechatronic drive systems.